



LED Floor Light

B10

IP67

IP54

Ultra-thin

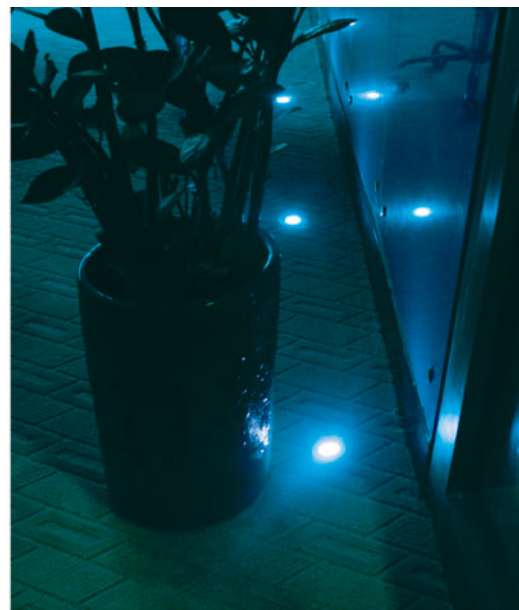

• Specification


Model	B10	B10 B	B10C
Voltage	DC 12V	DC 12V	DC 12V
Rated Output Power	0.5W	0.5W	0.3W (Single-color) / 0.7W (Multi-color)
Lumen Output	7 Lm	7 Lm	4 Lm
Beam angle	120°	120°	120°
LED	6pcs SMD3350 LED	6pcs SMD3350 LED	9pcs SMD3350 LED
IP Rating	IP54	IP67	IP67
Warranty	3 Years Limited	3 Years Limited	3 Years Limited
Cover	high-intensity tempered glass		
Surface Material	High Grade 304/316 Stainless Steel		
Attached Parts:	DC12V constant voltage driver power supply		
	T shape power cord with connectable waterproof plug or AMP plug	22AWG wire with connectable waterproof plug	Four-wire Three-loop circuit RGB controller + remote controller / multifunctional RGB controller
Standards			

• Features

- Adopt SMD LED technology;
- Ultra thin design, low built-in depth 9 mm only;
- With easy & convenient installation;
- Walkover pressure max.100KGS;
- Long lifespan over 50000 hours.



• Installation:

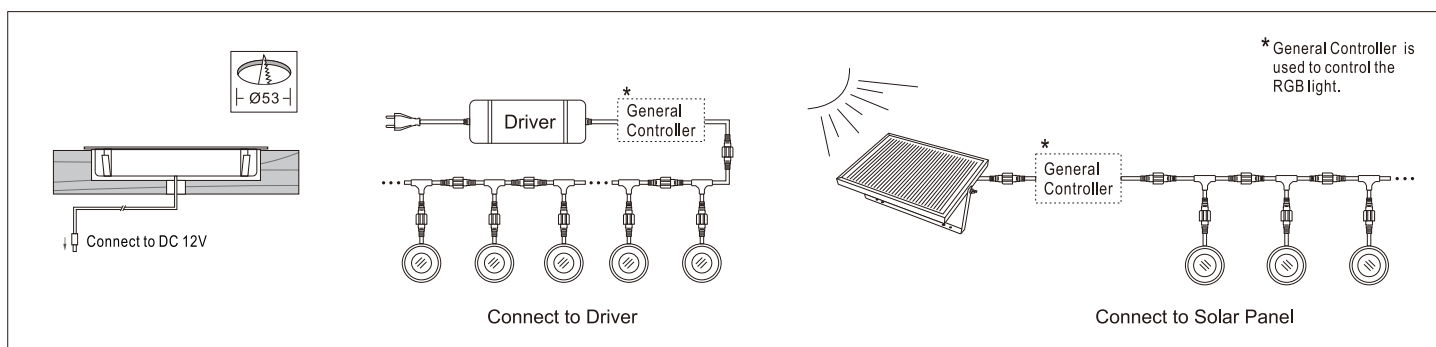

• Fittings




LED Floor Light

B02

IP67

IP54

Ultra-thin

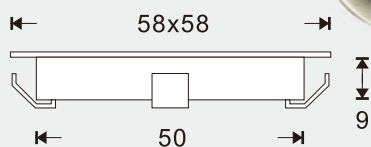

• Specification


Model	B 02A	B02B	B02C
Voltage	DC 12V	DC 12V	DC 12V
Rated Output Power	0.6W	0.6W	0.4W (Single-color) / 0.9W (Multi-color)
Lumen Output	9 Lm	9 Lm	4.5 Lm
Beam angle	120°	120°	120°
LED	8pcs SMD3350 LED	8pcs SMD3350 LED	12pcs SMD3350 LED
IP Rating	IP54	IP67	IP67
Warranty	3 Years Limited	3 Years Limited	3 Years Limited
Cover	high-intensity tempered glass		
Surface Material	High Grade 304/316 Stainless Steel		
Attached Parts:	DC12V constant voltage driver power supply		
	T shape power cord with connectable waterproof plug or AMP plug	22AWG wire with connectable waterproof plug	Four-wire Three-loop circuit RGB controller +remote controller / multifunctional RGB controller
Standards			

• Features

- Adopt SMD LED technology;
- Ultra thin design, low built-in depth 9 mm only;
- With easy & convenient installation;
- Square shape for plinth lighting
- Walkover pressure max.100KGS;
- Long lifespan over 50000 hours.






• Installation:

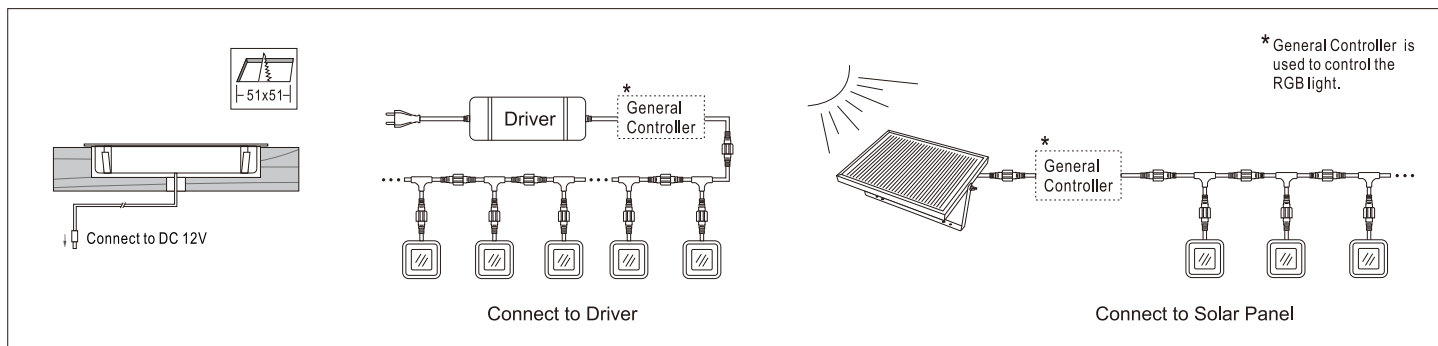

• Fittings



LED Floor Light

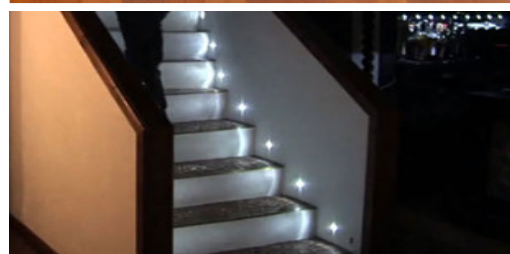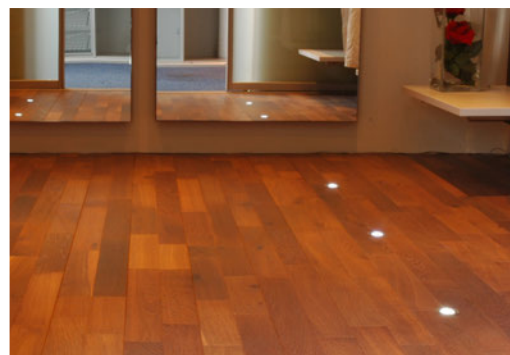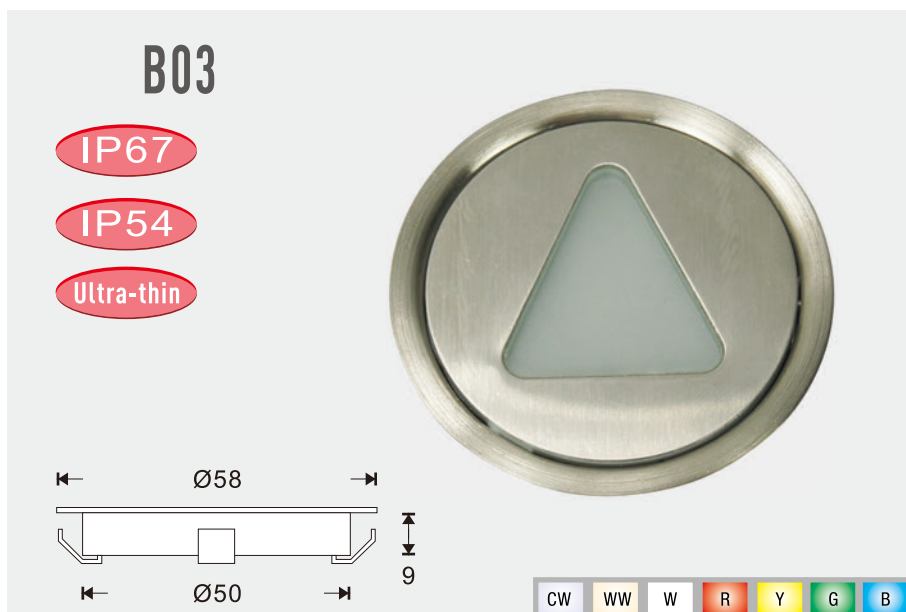


• Specification


Model	B03A	B03B
Voltage	DC 12V	DC 12V
Rated Output Power	0.4W	0.4W
Lumen Output	6 Lm	6 Lm
Beam angle	120°	120°
LED	5pcs SMD3350 LED	5pcs SMD3350 LED
IP Rating	IP54	IP67
Warranty	3 Years Limited	3 Years Limited
Cover	high-intensity tempered glass	
Surface Material	High Grade 304/316 Stainless Steel	
Attached Parts:	DC12V constant voltage driver power supply	22AWG wire with connectable waterproof plug
	T shape power cord with connectable waterproof plug or AMP plug	Four-wire Three-loop circuit RGB controller +remote controller / multifunctional RGB controller
Standards		

• Features

- Adopt SMD LED technology;
- Ultra thin design, low built-in depth 9 mm only;
- With easy & convenient installation;
- Walkover pressure max.100KGS;
- Long lifespan over 50000 hours.

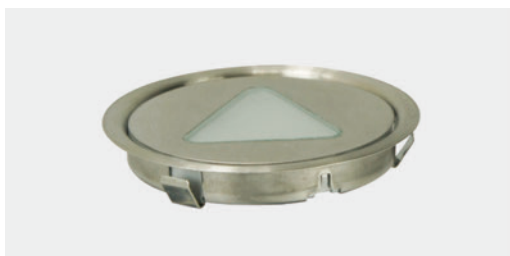

• Installation:

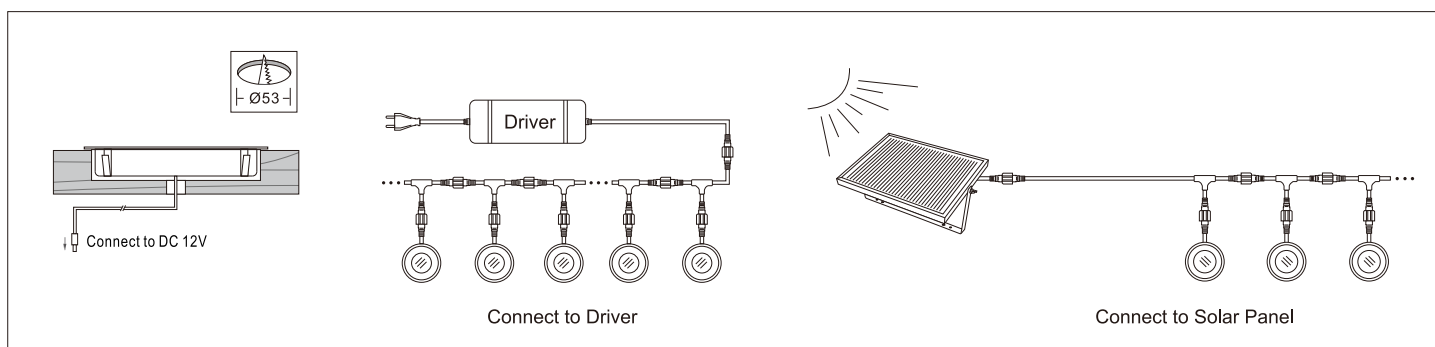


• Fittings



LED Floor Light

B04

IP67



• Specification


Model	B04A	B04B	B04C
Voltage	DC 12V	DC 12V	DC 12V
Rated Output Power	1W	1W	0.2W (Single-color) / 0.4W (Multi-color)
Lumen Output	60 Lm	60Lm	4Lm
Beam angle	120°	120°	120°
LED	6pcs SMD2835 LED	6pcs SMD2835 LED	1pc SMD5050 LED
IP Rating	IP67	IP67	IP67
Warranty	3 Years Limited	3 Years Limited	3 Years Limited
Surface Material	PC & High Grade 304/316 Stainless Steel		
Attached Parts:	DC12V constant voltage driver power supply;		
	22AWG wire with connectable waterproof plug;		
	Four-wire Three-loop circuit RGB controler + remote controller /multifunctional RGB controler;		
Standards			

• Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- With easy & convenient installation;
- Walkover pressure max.100KGS;
- Long lifespan over 50000 hours.



• Installation:

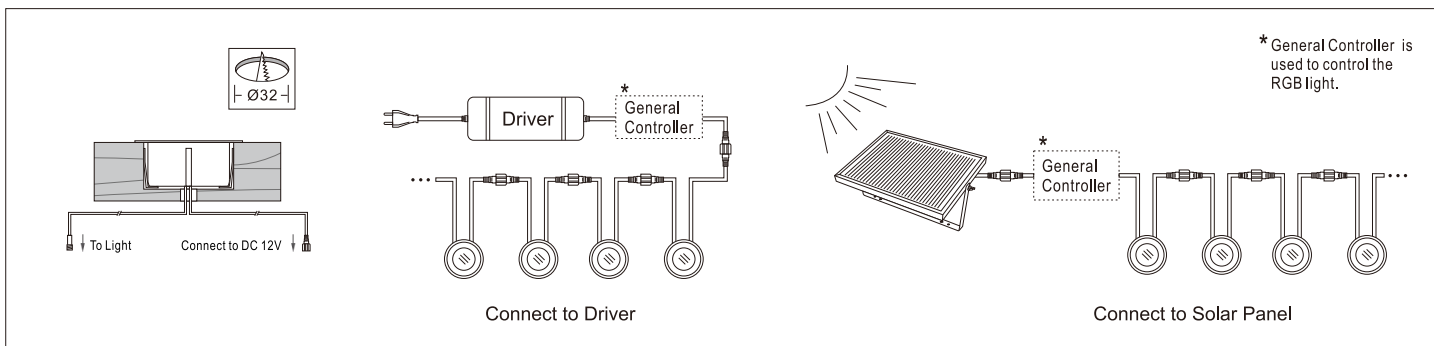

• Fittings





LED Floor Light

B05

IP67

IP54

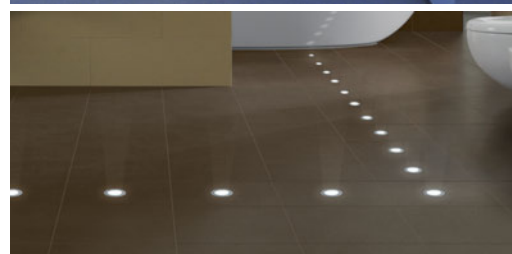

• Specification



Model	B05A	B05B
Voltage	DC 12V	DC 12V
Rated Output Power	0.6W	0.6W
Lumen Output	9 Lm	9 Lm
Beam angle	120°	120°
LED	1pc SMD2835 LED	1pc SMD2835 LED
IP Rating	3 Years Limited	3 Years Limited
Warranty	IP54	IP67
Surface Material	PC & High Grade 304/316 Stainless Steel	
Attached Parts:	DC12V constant voltage driver power supply;	
	22AWG wire with connectable waterproof plug;	
	T shape power cord with connectable waterproof plug or AMP plug	
Standards		

• Features


- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- With easy & convenient installation;
- Walkover pressure max.100KGS;
- Long lifespan over 50000 hours.



• Installation:

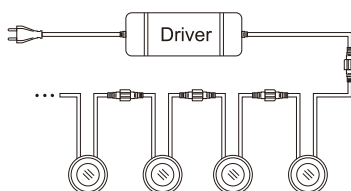

Set 2: Connect to Driver

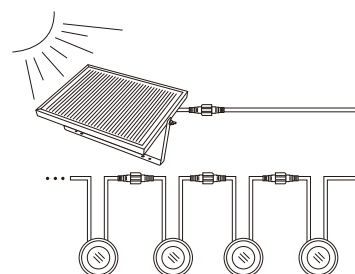

Set 3: Connect to Solar Panel

• Fittings



LED Floor Light



• Specification


Model	B06A	B06C
Voltage	DC 12V	DC 12V
Rated Output Power	0.4W	0.2W (Single-color) / 0.4W (Multi-color)
Lumen Output	10 Lm	4 Lm
Beam angle	90°	90°
LED	1pc SMD5050 LED	1pc SMD5050 LED
IP Rating	IP65	IP65
Warranty	3 Years Limited	3 Years Limited
Surface Material	Zinc Alloys/ Stainless Steel	Zinc Alloys/ Stainless Steel
Attached Parts:	DC12V constant voltage driver power supply;	
	T shape power cord with connectable waterproof plug	Four-wire Three-loop circuit RGB controler +remote controller / multifunctional RGB controller;
Standards	RoHS	

• Features

- Adopt SMD LED technology;
- Special half-moon design;
- With easy & convenient installation;
- Walkover pressure max.100KGS;
- Long lifespan over 50000 hours.



• Installation:

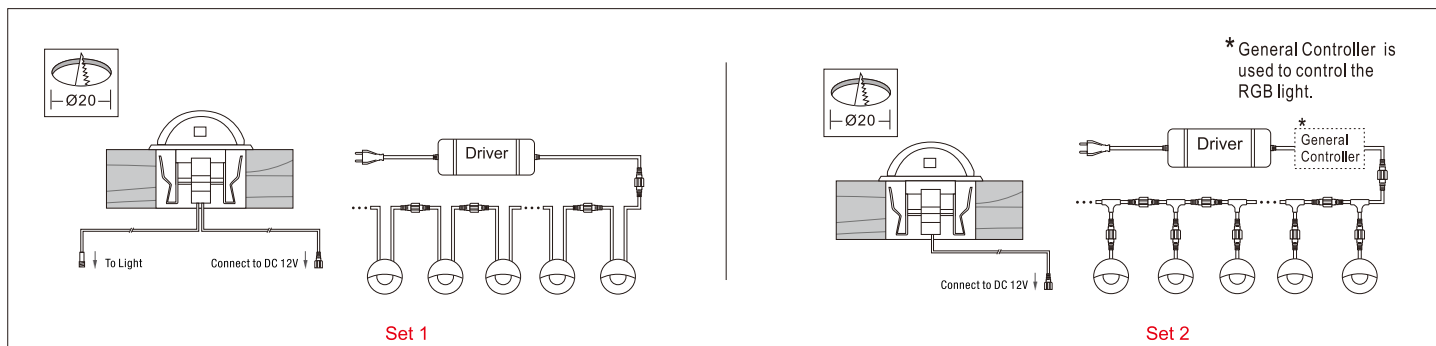


• Fittings



LED Deck Light

B07

IP67



• Specification


Model	B07A	B07C
Voltage	DC 12V	DC 12V
Rated Output Power	2.5W	0.7W (Single-color) / 2W (Multi-color)
Lumen Output	200 Lm	45 Lm
Beam angle	120°	120°
LED	30pcs SMD3528 LED	9pcs SMD5050 LED
IP Rating	IP67	IP67
Warranty	3 Years Limited	3 Years Limited
Surface Material	PC & High Grade 304/316 Stainless Steel	
Attached Parts:	DC12V constant voltage driver power supply; 22AWG wire with connectable waterproof plug;	
	T shape power cord with connectable waterproof plug.	Four-wire Three-loop circuit RGB controller + remote controller / multifunctional RGB controller;
Standards		

• Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- With easy & convenient installation;
- Walkover pressure max.100KGS;
- Long lifespan over 50000 hours.



• Installation:

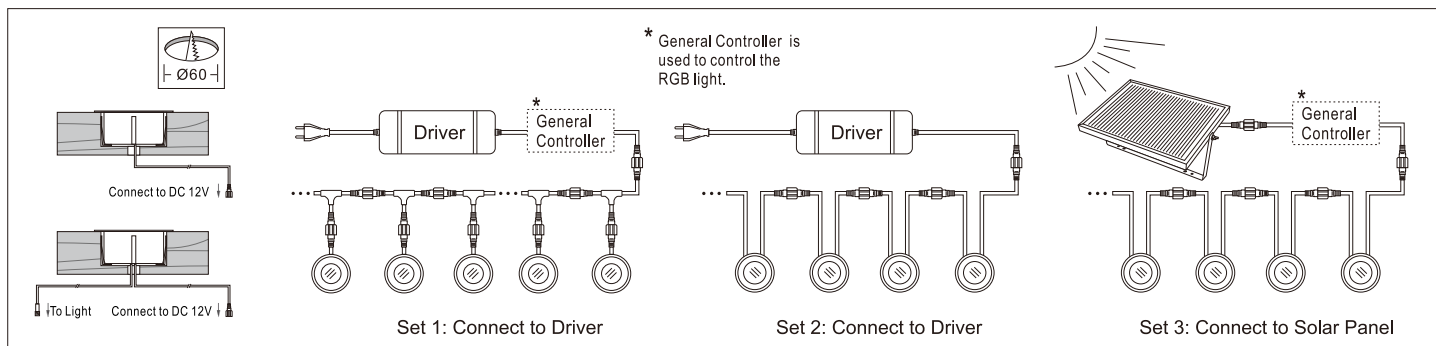


• Fittings



LED Deck Light

B08

IP67



• Specification


Model	B08A	B08C
Voltage	DC 12V	DC 12V
Rated Output Power	1.5W	0.3W (Single-color) / 1W (Multi-color)
Lumen Output	110 Lm	30 Lm
Beam angle	120°	120°
LED	15pcs SMD2835 LED	6pcs SMD5050 LED
IP Rating	IP67	IP67
Warranty	3 Years Limited	3 Years Limited
Surface Material	PC & High Grade 304/316 Stainless Steel	
Attached Parts:	DC12V constant voltage driver power supply; 22AWG wire with connectable waterproof plug;	
	T shape power cord with connectable waterproof plug.	Four-wire Three-loop circuit RGB controller +remote controller / multifunctional RGB controller;
Standards		

• Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- With easy & convenient installation;
- Walkover pressure max.100KGS;
- Long lifespan over 50000 hours.



• Installation:

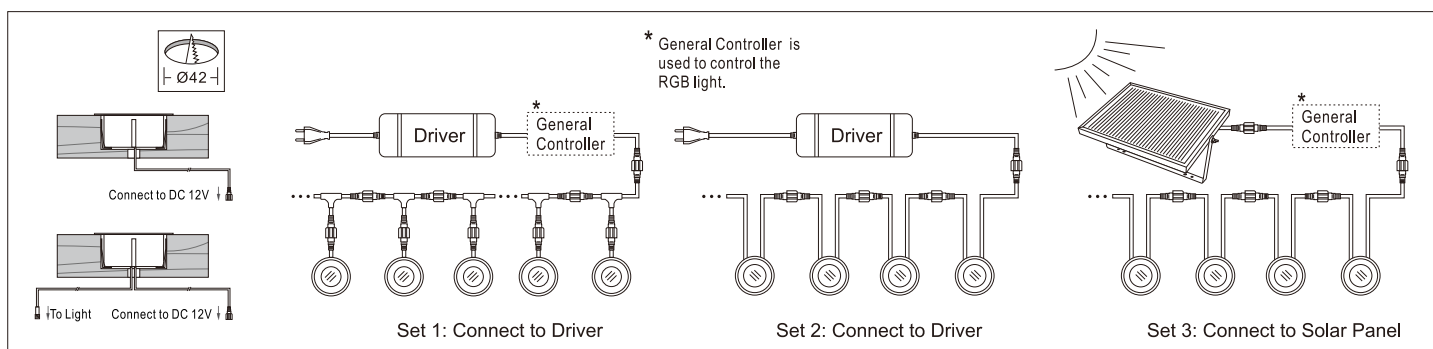


• Fittings



LED Deck Light

B09

IP67



• Specification


Model	B09A	B09C
Voltage	DC 12V	DC 12V
Rated Output Power	1W	0.2W (Single-color) / 0.5W (Multi-color)
Lumen Output	75 Lm	12 Lm
Beam angle	120°	120°
LED	6pcs SMD2835 LED	3pcs SMD5050 LED
IP Rating	IP67	IP67
Warranty	3 Years Limited	3 Years Limited
Surface Material	PC & High Grade 304/316 Stainless Steel	
Attached Parts:	DC12V constant voltage driver power supply; 22AWG wire with connectable waterproof plug;	
	T shape power cord with connectable waterproof plug.	Four-wire Three-loop circuit RGB controller +remote controller / multifunctional RGB controller;
Standards	RoHS	

• Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- With easy & convenient installation;
- Walkover pressure max.100KGS;
- Long lifespan over 50000 hours.



• Installation:

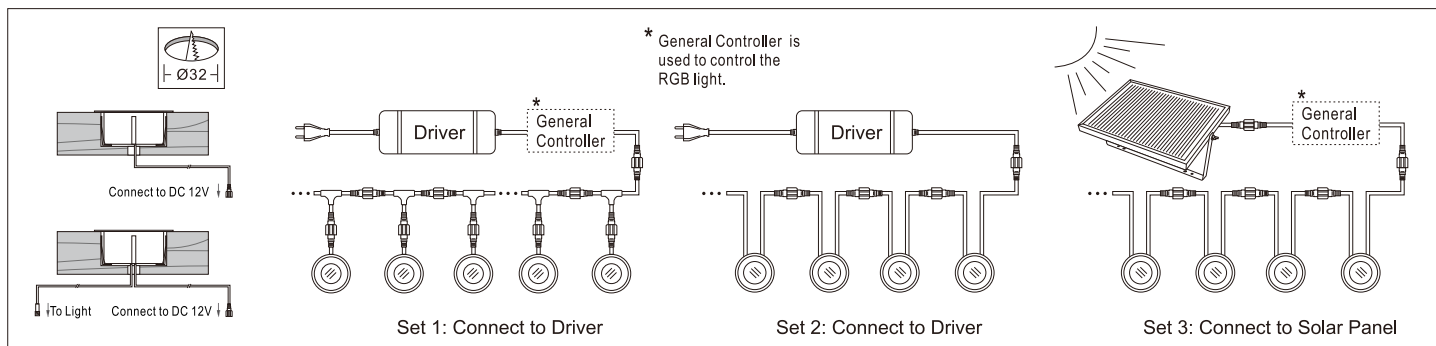


• Fittings



LED Deck Light

B11

IP67



• Specification


Model	B11A	B11C
Voltage	DC 12V	DC 12V
Rated Output Power	0.6W	0.1W (Single-color) / 0.3W (Multi-color)
Lumen Output	40 Lm	6 Lm
Beam angle	120°	120°
LED	3pcs SMD2835 LED	1pcs SMD5050 LED
IP Rating	IP67	IP67
Warranty	3 Years Limited	3 Years Limited
Surface Material	PC & High Grade 304/316 Stainless Steel	
Attached Parts:	DC12V constant voltage driver power supply;	
	22AWG wire with connectable waterproof plug;	
	T shape power cord with connectable waterproof plug.	Four-wire Three-loop circuit RGB controler +remote controller / multifunctional RGB controler;
Standards		

• Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- 30mm special mini size;
- With easy & convenient installation;
- Walkover pressure max.100KGS;
- Long lifespan over 50000 hours.



• Installation:

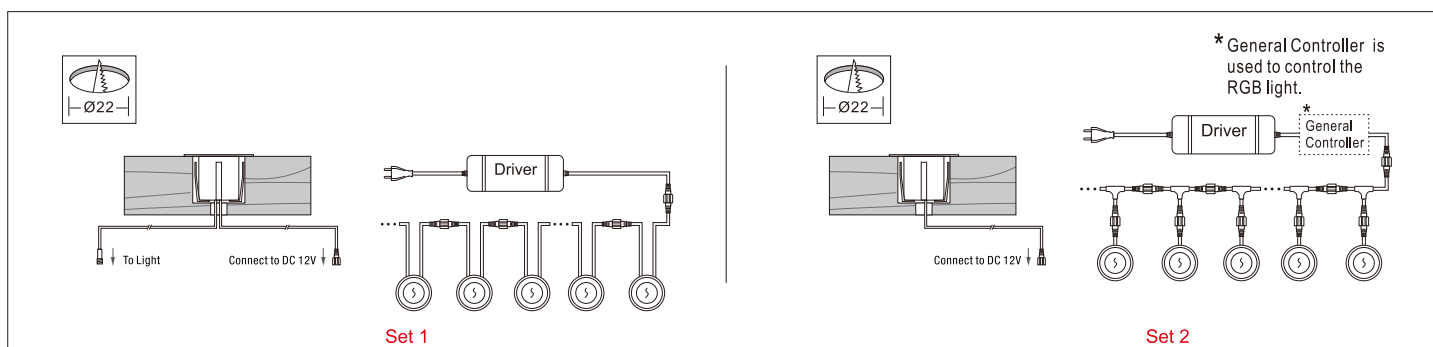


• Fittings



LED Deck Light

B1

IP67




• Specification


Model	B1
Voltage	DC 12V
Rated Output Power	0.4W
Lumen Output	7 Lm
Beam angle	120°
LED	1pcs SMD2835 LED
IP Rating	IP67
Warranty	3 Years Limited
Surface Material	PC & High Grade 304/316 Stainless Steel
Attached Parts:	DC12V constant voltage driver power supply;
	22AWG wire with connectable waterproof plug;
	T shape power cord with connectable waterproof plug.
Standards	

• Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- With easy & convenient installation;
- Walkover pressure max.100KGS;
- Long lifespan over 50000 hours.

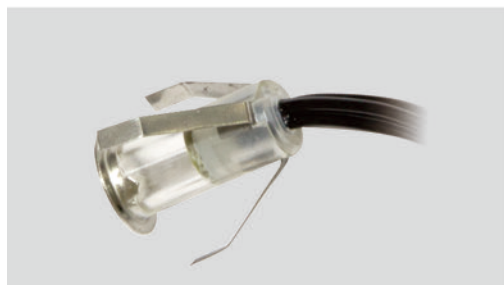

• Installation:

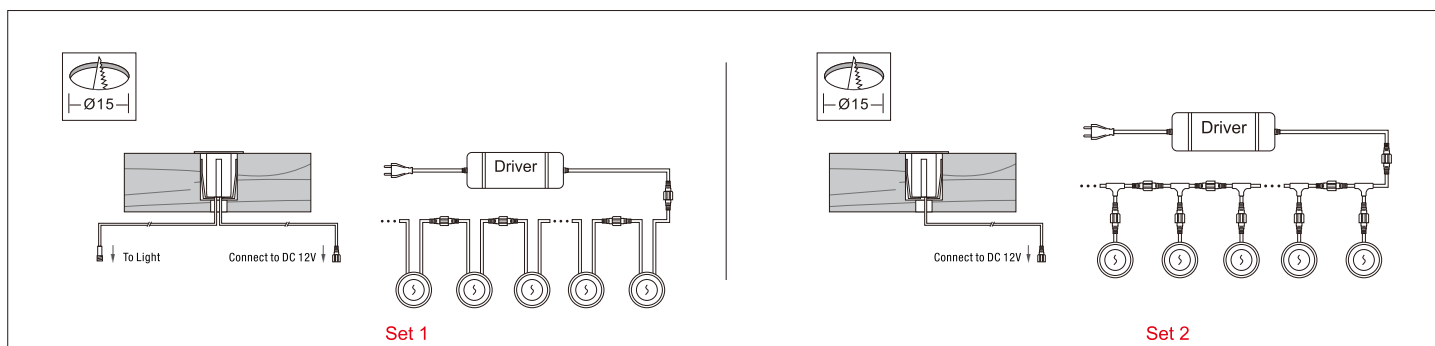


• Fittings



LED Floor Light

B12

IP67



• Specification


Model	B112A
Voltage	DC 12V
Rated Output Power	0.6W
Lumen Output	6 Lm
Beam angle	120°
LED	1pc SMD2835 LED
IP Rating	IP67
Warranty	3 Years Limited
Surface Material	PC & High Grade 304/316 Stainless Steel
Attached Parts:	DC12V constant voltage driver power supply;
	22AWG wire with connectable waterproof plug;
	T shape power cord with connectable waterproof plug.
Standards	

• Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Very thin design with wire come out from side;
- With easy & convenient installation;
- Walkover pressure max.100KGS;
- Long lifespan over 50000 hours.




• Installation:

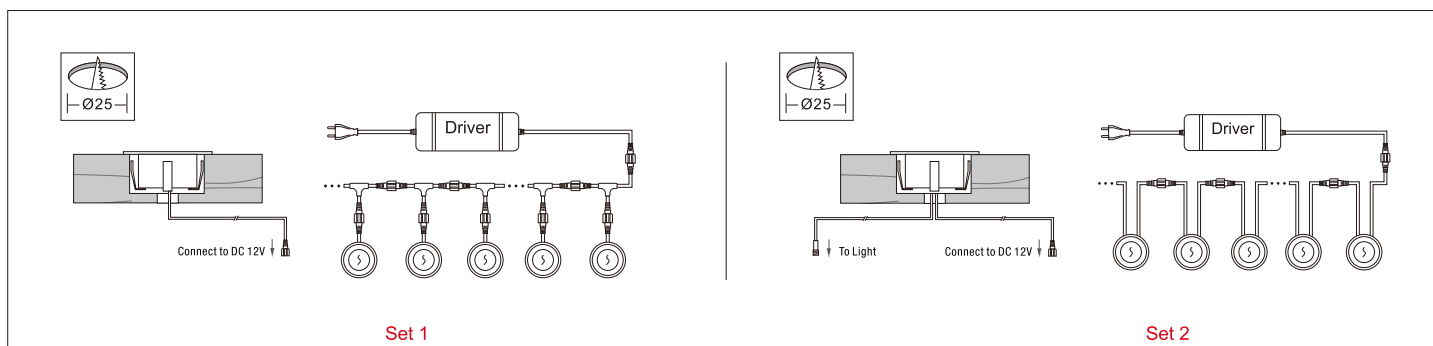

• Fittings



LED Floor Light

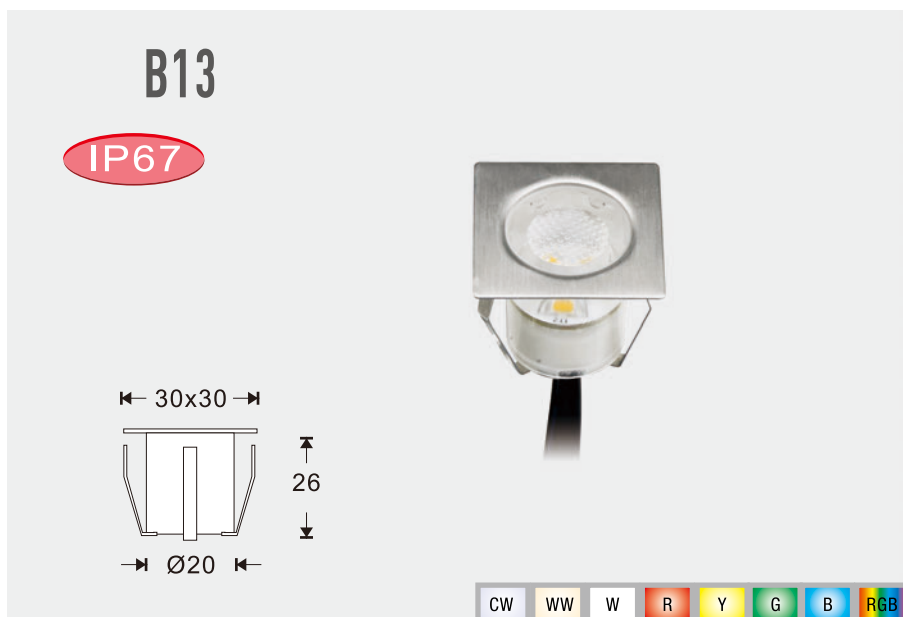


• Specification


Model	B13A	B13C
Voltage	DC 12V	DC 12V
Rated Output Power	0.6W	0.1W (Single-color) / 0.3W (Multi-color)
Lumen Output	40 Lm	6 Lm
Beam angle	120°	120°
LED	3pc SMD2835 LED	1pc SMD5050 LED
IP Rating	IP67	IP67
Warranty	3 Years Limited	3 Years Limited
Surface Material	PC & High Grade 304/316 Stainless Steel	
Attached Parts:	22AWG wire with connectable waterproof plug	
	T shape power cord with connectable waterproof plug	Four-wire Three-loop circuit RGB controller +remote controller / multifunctional RGB controller
Standards		

• Features

- Adopt SMD LED technology;
- Hardware & plastic integrated design;
- Special square design;
- With easy & convenient installation;
- Walkover pressure max.100KGS;
- Long lifespan over 50000 hours.

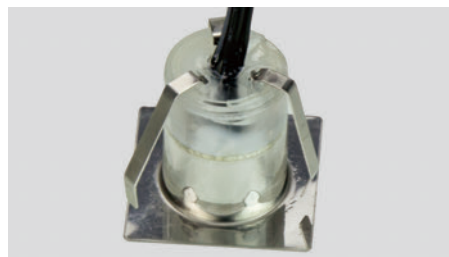

• Installation:

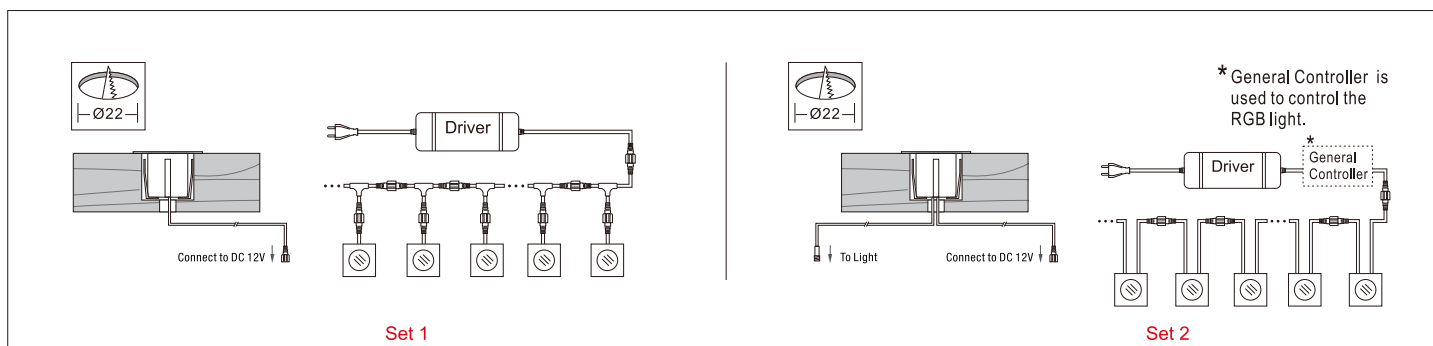

• Fittings



LED Inground Light



• Specification


Model	F01A	01C
Voltage	DC 12V	DC 12V
Rated Output Power	0.6W	0.24W (Single-color) / 0.8W (Multi-color)
Lumen Output	8 Lm	2 Lm
Beam angle	90°	90°
LED	1pcs SMD2835 LED	1pcs SMD5050 LED
IP Rating	IP65	IP65
Warranty	3 Years Limited	3 Years Limited
Surface Material	Zinc Alloys + Aluminum	Zinc Alloys + Aluminum
Attached Parts:	DC12V constant voltage drive power supply;	
	22AWG wire with connectable waterproof plug;	
	T shape power cord with connectable waterproof plug.	
Standards		

• Features

- Adopt SMD LED technology;
- Half-moon special design;
- With easy & convenient installation;
- Walkover pressure max.100KGS;
- Long lifespan over 50000 hours.




• Installation:

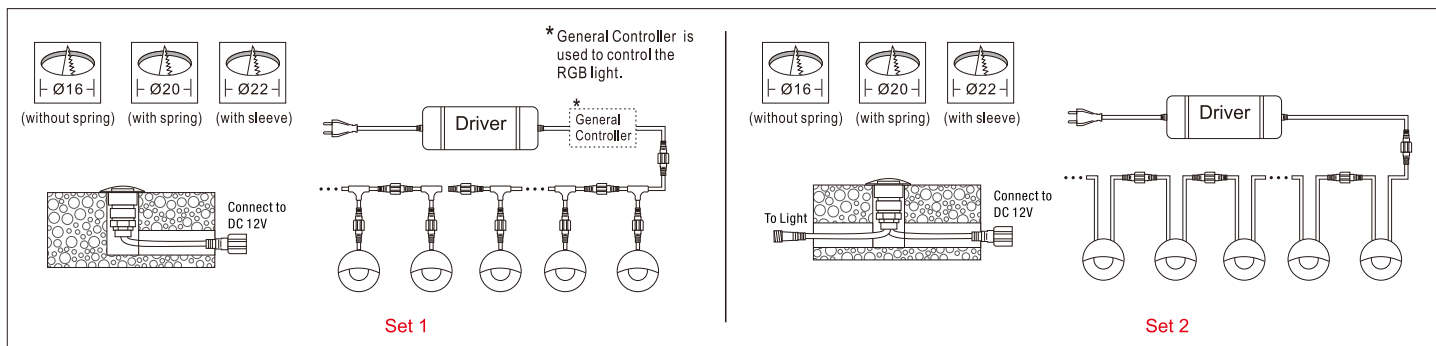

• Fittings



LED Inground Light

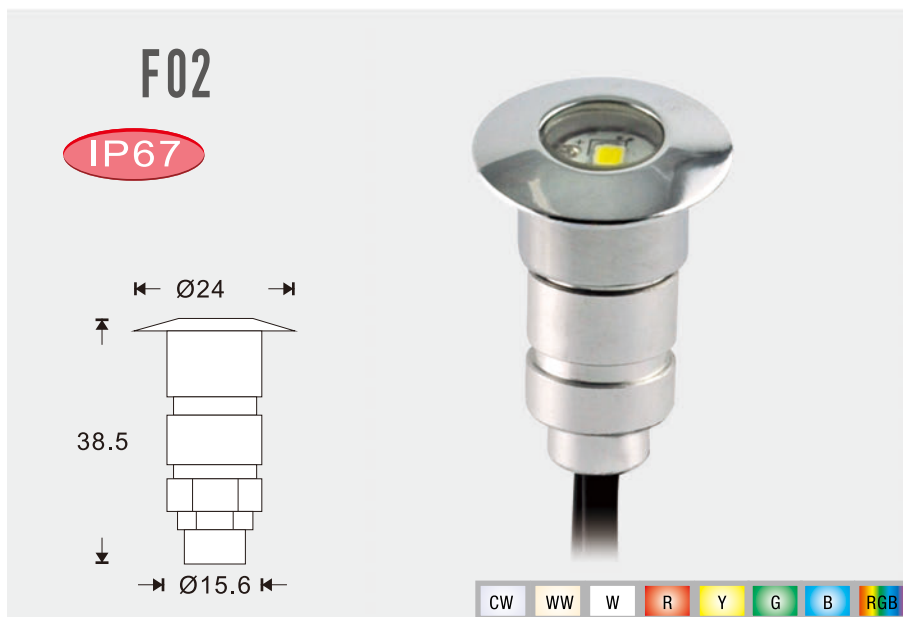

• Specification


Model	F02A	F02C
Voltage	DC 12V	DC 12V
Rated Output Power	0.6W	0.24W (Single-color) / 0.8W (Multi-color)
Lumen Output	12 Lm	4 Lm
Beam angle	120°	120°
LED	1pc SMD2835 LED	1pc SMD5050 LED
IP Rating	IP67	IP67
Warranty	3 Years Limited	3 Years Limited
Surface Material	Zinc Alloys + Aluminum + Glass	Zinc Alloys + Aluminum + Glass
Attached Parts:	DC12V constant voltage drive power supply;	
	22AWG wire with connectable waterproof plug;	
	T shape power cord with connectable waterproof plug.	
Standards		

• Features

- Adopt SMD LED technology;
- With easy & convenient installation;
- Walkover pressure max.100KGS;
- Long lifespan over 50000 hours.



• Installation:

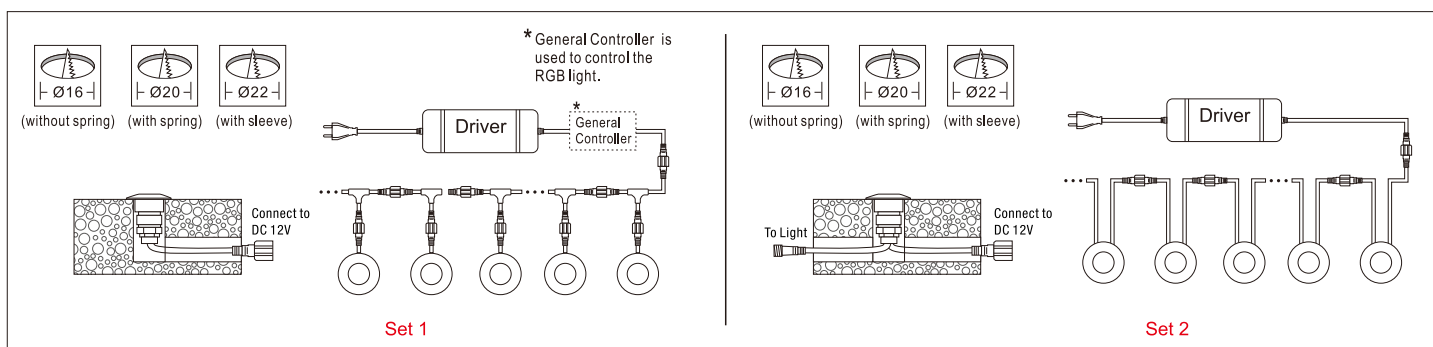

• Fittings

