

LED LINEAR LIGHTING

—

2020 PRODUCT CATALOG

03-4835-L2

Dimension: L1209*W48*H35MM
 Cut Out: L1197*W43MM
 Power: 36W
 Packing Size:
 Inner box: L130*W13*H7CM
 Outer Carton: L132*W26.5*H15.5CM 8pcs/Ctns



03-4835-3L

Dimension: L1209*W48*H35MM
 Cut Out: L1197*W43MM
 Power: 30W
 Packing Size:
 Inner box: L130*W13*H7CM
 Outer Carton: L132*W26.5*H15.5CM 8pcs/Ctns




03-4835-L/C

Dimension: L1209*W48*H35MM
 Cut Out: L1197*W43MM
 Power: 25W
 Packing Size:
 Inner box: L130*W13*H7CM
 Outer Carton: L132*W26.5*H15.5CM 8pcs/Ctns



03-4835-2L5

Dimension: L1209*W48*H35MM
 Cut Out: L1197*W43MM
 Power: 20W
 Packing Size:
 Inner box: L130*W13*H7CM
 Outer Carton: L132*W26.5*H15.5CM 8pcs/Ctns

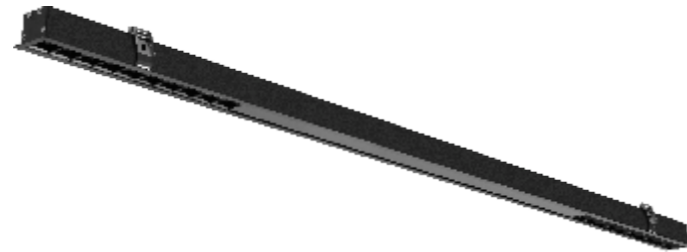

Model	Material	LED Chips	Driver	Dimming	Beam Angle	UGR	CRI(Ra)
03-4835-L2	Aluminum+PC diffuser/ reflector cup/PMMA	OSRAW/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°/ 15°/30°/45° (12°/24°/ 38°/50°/Square50x50°/70x70°/ Rectangle35x70° optional)	19	≥80
03-4835-3L	Aluminum+reflector cup/PMMA	OSRAW/3030	Lifud	0-10V Dimming/ DALI Dimming Optional	15°/30°/45° (12°/24°/ 38°/50°/Square50x50°/70x70°/ Rectangle35x70° optional)	<16	≥80
03-4835-L/C	Aluminum/ reflector cup/PMMA	OSRAW/3030	Lifud	0-10V Dimming/ DALI Dimming Optional	15°/30°/45° (12°/24°/ 38°/50°/Square50x50°/70x70°/ Rectangle35x70° optional)	<16	≥80
03-4835-2L5	Aluminum/ reflector cup/PMMA	OSRAW/3030	Lifud	0-10V Dimming/ DALI Dimming Optional	15°/30°/45° (12°/24°/ 38°/50°/Square50x50°/70x70°/ Rectangle35x70° optional)	<16	≥80




The recessed linear lighting solution for office, home, shop, restaurant and more.



03-3865UD

Dimension: L1196.5*W38*H65MM
 Power: 50W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS

Up and Down LED Linear light

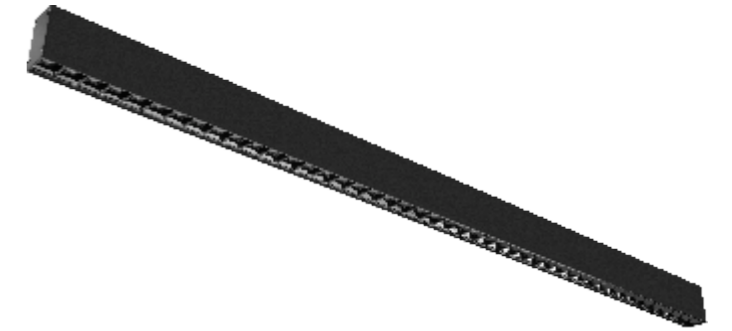


03-3865-L

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



03-3865-P

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS

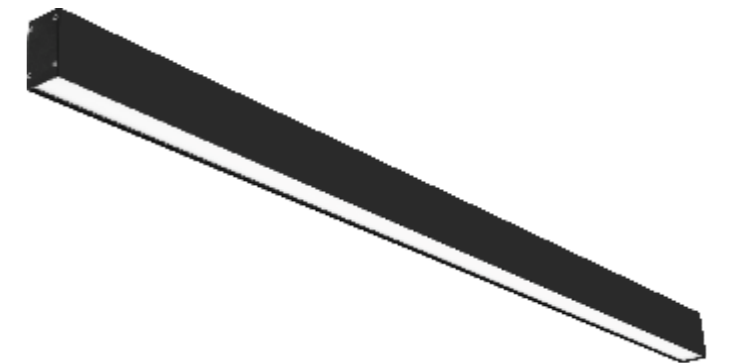

SUSPENDED/SURFACE MOUNTED 3865 SERIES LED LINEAR LIGHT

Our LED Modular Linear Light, ideal for both residential and commercial venues, is characterized by minimal design and elegant finishes. Based on the needs of the project it is also possible to do customized and tailor-made the projects.

Features:

- 1: It Can be suspended/surface mounted individually or in a continuous run.
- 2: Tailored type of lighting-floodlight, spotlight, Track light and blind cover.
- 3: Featured Aluminum Material with excellent heat dissipation, High brightness without stroboscopic.
- 4: Energy saving up to 50% compare to the traditional fluorescent lamp.
- 5: Variety of linear light series for optional: 3865,4678,58100 series, which can meet the needs of different occasions.
- 6: Wide Application: Office, Gallery, Shop, Home, Hotel, Restaurant, etc

* Universal Specifications:

Voltage: AC100-277V 50-60HZ Light Effect: 65-110lm/w
 Working Temperature: -30°C to 70°C IP Rate: IP20 Warranty: 3Years
 Color Temperature: 3000/4000/6000K

Model	Material	LED Chips	Driver	Dimming	Beam Angle	UGR	CRI(Ra)
03-3865UD	Alu+PC Diffuser+ reflector cup/PMMA	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC=120° , 15° /30° /45° optional	19	≥80
03-3865-L	Alu+reflector cup/PMMA	OSRAM/3030	Lifud	0-10V Dimming/ DALI Dimming Optional	15° /30° /45° optional	<16	≥80
03-3865-P	Alu+PC diffuser	OSRAM/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	120°	22	≥80

03-3865-4L

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



03-3865-3L3

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS




03-3865-2L5

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



03-3865-L7

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS

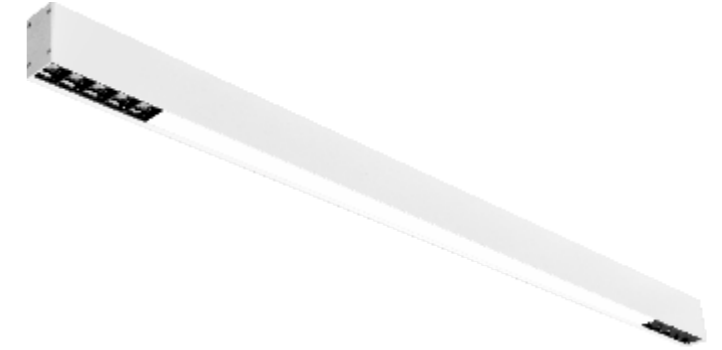

03-3865-3P3

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



03-3865-2P5L

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



Model	Material	LED Chips	Driver	Dimming	Beam Angle	UGR	CRI(Ra)
03-3865-4L	Alu+PC diffuser/ reflector cup/PMMA	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°/ 15° /30° /45° optional	19	≥80
03-3865-3L	Alu+PC diffuser/ reflector cup/PMMA	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°/ 15° /30° /45° optional	19	≥80
03-3865-2L5	Alu+PC diffuser/ reflector cup/PMMA	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°/ 15° /30° /45° optional	19	≥80

Model	Material	LED Chips	Driver	Dimming	Beam Angle	UGR	CRI(Ra)
03-3865-L7	Alu+PC diffuser/ reflector cup/PMMA	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°/ 15° /30° /45° optional	19	≥80
03-3865-3P3	Alu+PC diffuser/ reflector cup/PMMA	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°/ 15° /30° /45° optional	19	≥80
03-3865-2P5L	Alu+PC diffuser/ reflector cup/PMMA	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°/ 15° /30° /45° optional	19	≥80


03-3865-L/P

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



03-3865-P/L

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



03-3865-2PLPL

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



03-3865-L3P

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



03-3865-L2P3

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



03-3865-L2C

Dimension: L1196.5*W38*H65MM
 Power: 30W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



Model	Material	LED Chips	Driver	Dimming	Beam Angle	UGR	CRI(Ra)
03-3865-L/P	Alu+PC diffuser/ reflector cup/PMMA	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°/ 15° /30° /45° optional	19	≥80
03-3865-P/L	Alu+PC diffuser/ reflector cup/PMMA	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°/ 15° /30° /45° optional	19	≥80
03-3865-2PLPL	Alu+PC diffuser/ reflector cup/PMMA	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°/ 15° /30° /45° optional	19	≥80

Model	Material	LED Chips	Driver	Dimming	Beam Angle	UGR	CRI(Ra)
03-3865-L3P	Alu+PC diffuser/ reflector cup/PMMA	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°/ 15° /30° /45° optional	19	≥80
03-3865-L2P3	Alu+PC diffuser/ reflector cup/PMMA	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°/ 15° /30° /45° optional	19	≥80
03-3865-L2C	Alu+reflector cup/ PMMA	OSRAM/3030	Lifud	0-10V Dimming/ DALI Dimming Optional	15° /30° /45° optional	<16	≥80

03-3865-3L3

Dimension: L1196.5*W38*H65MM
 Power: 30W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



03-3865-2L5C

Dimension: L1196.5*W38*H65MM
 Power: 20W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



03-3865-L/C

Dimension: L1196.5*W38*H65MM
 Power: 20W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



Model	Material	LED Chips	Driver	Dimming	Beam Angle	UGR	CRI(Ra)
FG03-3865-3L3C3L	Alu+Blind cover/ reflector cup/PMMA	OSRAM/3030	Lifud	0-10V Dimming/ DALI Dimming Optional	15° /30° /45° optional	<16	≥80
FG03-3865-2L5C2L	Alu+Blind cover/ reflector cup/PMMA	OSRAM/3030	Lifud	0-10V Dimming/ DALI Dimming Optional	15° /30° /45° optional	<16	≥80
FG03-3865-L/C	Alu+Blind cover/ reflector cup/PMMA	OSRAM/3030	Lifud	0-10V Dimming/ DALI Dimming Optional	15° /30° /45° optional	<16	≥80



03-3865-3L3

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



03-3865-3P3S

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



03-3865-3L3S

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



Model	Material	LED Chips	Driver	Dimming	Beam Angle	UGR	CRI(Ra)
03-3865-3L3	Alu+Reflector cup/ PMMA	OSRAM/3030/5050	Lifud	0-10V Dimming/ DALI Dimming Optional	Reflector cup: 15°,30°,45° Spotlight:10°/ 20° optional	<16	≥80
03-3865-3P3S	Alu+PC diffuser+PMMA	OSRAM/5050/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC=120°, Spotlight:10°/ 20°	19	≥80
03-3865-3L3S	Alu+PC diffuser/reflector cup/PMMA lens	OSRAM/3030/2835/5050	Lifud	0-10V Dimming/ DALI Dimming Optional	PC=120°, Reflector cup:15°,30°,45°, spotlight:10°/ 20° optional	19	≥80


03-3865-S7L

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



03-3865-S7P

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS

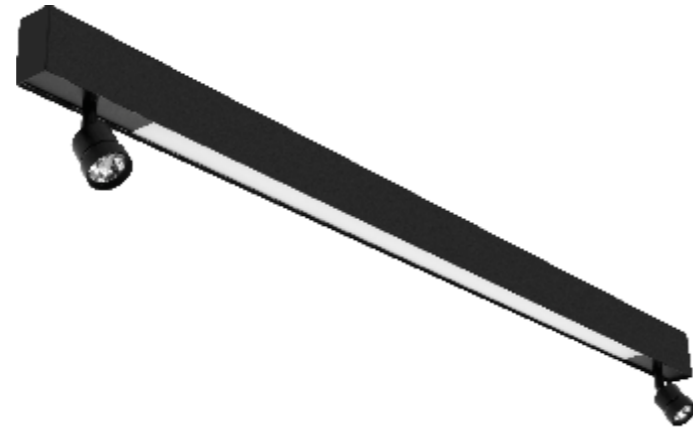

03-3865-S3L

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



03-3865-S3PS

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS




03-3865-2S5L

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS



03-3865-2S5P

Dimension: L1196.5*W38*H65MM
 Power: 36W
 Packing Size:
 Inner Box: L130*W10*H7CM
 Outer Carton: L132*W21.5*H15.5CM 6pcs/CTNS

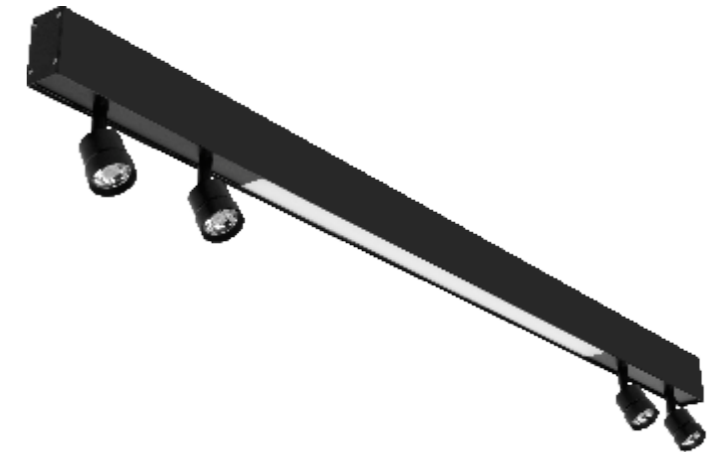

Model	Material	LED Chips	Driver	Dimming	Beam Angle	UGR	CRI(Ra)
03-3865-S7L	Alu+Reflector cup+PMMA lens	OSRAM/3030/5050	Lifud	0-10V Dimming/ DALI Dimming Optional	15°/ 30°/ 45° spotlight10°/ 20° optional	<16	≥80
03-3865-S7P	Alu+PC diffuser/PMMA	OSRAM/2835/5050	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°, spotlight10°/ 20° optional	19	≥80
03-3865-S3LS	Alu+Reflector cup+PMMA lens	OSRAM/3030/5050	Lifud	0-10V Dimming/ DALI Dimming Optional	15°/ 30°/ 45° spotlight10°/ 20° optional	<16	≥80

Model	Material	LED Chips	Driver	Dimming	Beam Angle	UGR	CRI(Ra)
03-3865-S3PS	Alu+PC diffuser/ PMMA Lens	OSRAM/2835/5050	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°, spotlight10°/ 20° optional	19	≥80
03-3865-2S5L	Alu+Reflector cup/ PMMA lens	OSRAM/3030/5050	Lifud	0-10V Dimming/ DALI Dimming Optional	15°/ 30°/ 45° Spotlight10°/ 20°	<16	≥80
03-3865-2S5P	Alu+PC diffuser/ PMMA Lens	OSRAM/2835/5050	Lifud	0-10V Dimming/ DALI Dimming Optional	PC=120° spotlight10°/ 20° optional	19	≥80



SUSPENDED/SURFACE MOUNTED 4678 SERIES LED LINEAR LIGHT

Our LED Modular Linear Light, ideal for both residential and commercial venues, is characterized by minimal design and elegant finishes. Based on the needs of the project it is also possible to do customized and tailor-made the projects.

Features:

- 1: It Can be suspended/surface mounted individually or in a continuous run.
- 2: Tailored type of lighting-floodlight, spotlight, Track light and blind cover.
- 3: Featured Aluminum Material with excellent heat dissipation, High brightness without stroboscopic.
- 4: Energy saving up to 50% compare to the traditional fluorescent lamp.
- 5: Variety of linear light series for optional: 3865,4678,58100 series, which can meet the needs of different occasions.
- 6: Wide Application: Office, Gallery, Shop, Home, Hotel, Restaurant, etc



* Universal Specifications:

Voltage: AC100-277V 50-60HZ Light Effect: 65-110lm/w
 Working Temperature: -30°C to 70°C IP Rate: IP20 Warranty: 3Years
 Color Temperature: 3000/4000/6000K

03-4678UD-6L

Dimension: L1144*W46*H78MM
 Power: 62W
 Packing Size:
 Inner Box: L124.5*W11.5*H8CM
 Outer Carton: L126*W24.5*H26CM 6pcs/CTNS


Up and Down LED Linear light

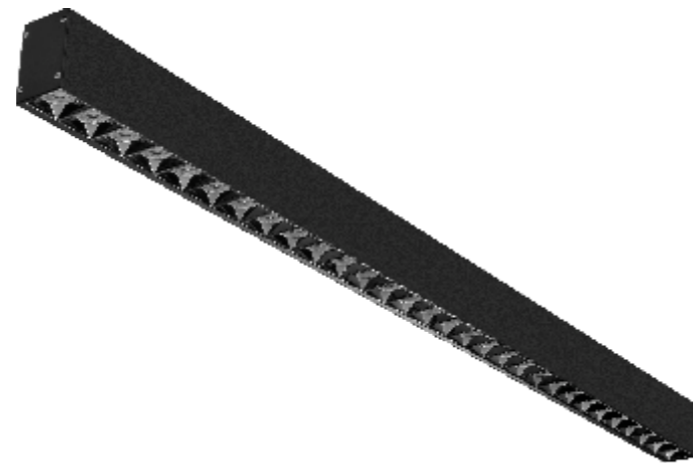

Model	Material	LED Chips	Driver	Dimming	Beam Angle	UGR	CRI(Ra)
03-4678UD-6L	Alu+PC diffuser+ Reflector cup/PMMA	OSRAM/2835/3030	Lifud	0-10V Dimming/ DALI Dimming Optional	PC= 120°/15°/30°/45° optional (12/24/38/50°/Square50x50°/70x70°/Rectangle35x70°/Asymmetric optional)	<16	≥80


03-4678-L

Dimension: L1144*W46*H78MM
 Power: 48W
 Packing Size:
 Inner Box: L124.5*W11.5*H8CM
 Outer Carton: L126*W24.5*H26CM 6pcs/CTNS

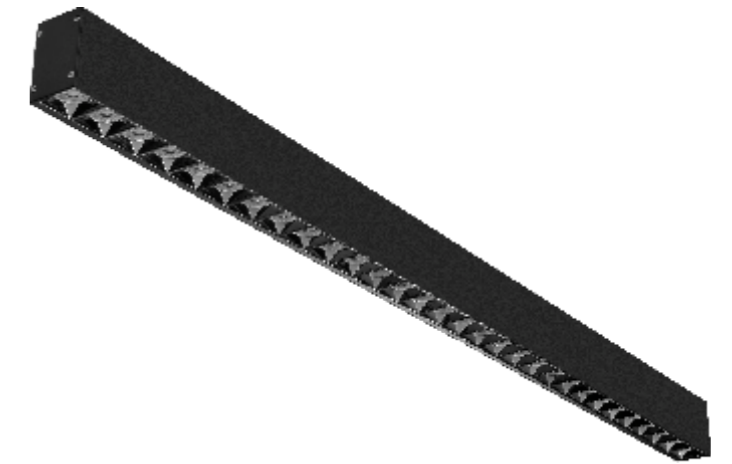

03-4678-P

Dimension: L1144*W46*H78MM
 Power: 48W
 Packing Size:
 Inner Box: L124.5*W11.5*H8CM
 Outer Carton: L126*W24.5*H26CM 6pcs/CTNS

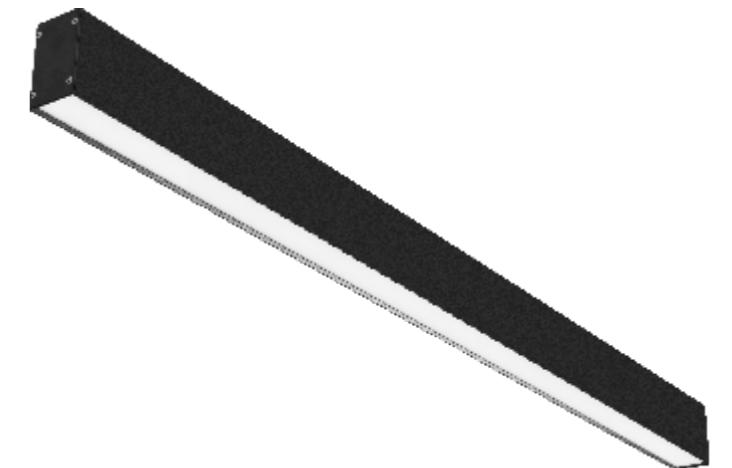

03-4678-3L


Dimension: L1144*W46*H78MM
 Power: 48W
 Packing Size:
 Inner Box: L124.5*W11.5*H8CM
 Outer Carton: L126*W24.5*H26CM 6pcs/CTNS



Model	Material	LED Chips	Driver	Dimming	Beam Angle	UGR	CRI(Ra)
03-4678-L	Aluminum + reflector cup/ PMMA	OSRAM/3030	Lifud	0-10V Dimming/ DALI Dimming Optional	15°/30°/45° optional (12/24/38/50°/Square50x50°/70x70°/Rectangle35x70°/Asymmetric optional)	<16	≥80
03-4678-P	Aluminum+PC diffuser	OSRAM/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	120°	22	≥80
03-4678-3L	Aluminum+PC diffuser/ reflector cup/PMMA	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°/15°/30°/45° optional (12/24/38/50°/Square50x50°/70x70°/Rectangle35x70°/Asymmetric optional)	19	≥80


03-4678-2L2

Dimension: L1144*W46*H78MM
 Power: 48W
 Packing Size:
 Inner Box: L124.5*W11.5*H8CM
 Outer Carton: L126*W24.5*H26CM 6pcs/CTNS

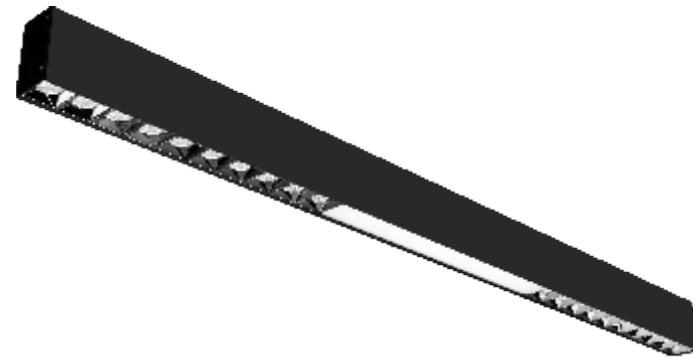

03-4678-LP2

Dimension: L1144*W46*H78MM
 Power: 48W
 Packing Size:
 Inner Box: L124.5*W11.5*H8CM
 Outer Carton: L126*W24.5*H26CM 6pcs/CTNS

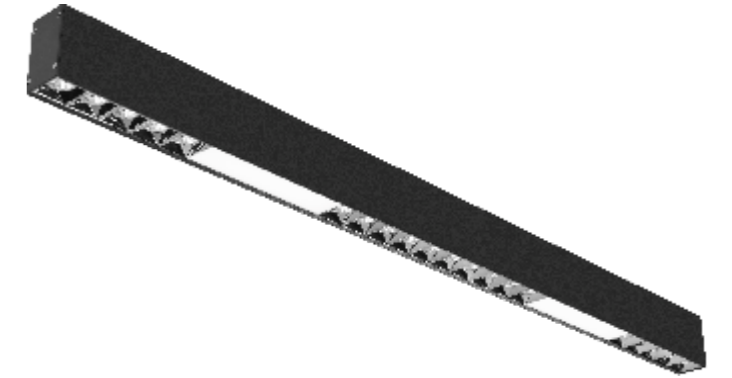


03-4678-L4P

Dimension: L1144*W46*H78MM
 Power: 48W
 Packing Size:
 Inner Box: L124.5*W11.5*H8CM
 Outer Carton: L126*W24.5*H26CM 6pcs/CTNS



FG03-4678-2P2

Dimension: L1144*W46*H78MM
 Power: 48W
 Packing Size:
 Inner Box: L124.5*W11.5*H8CM
 Outer Carton: L126*W24.5*H26CM 6pcs/CTNS

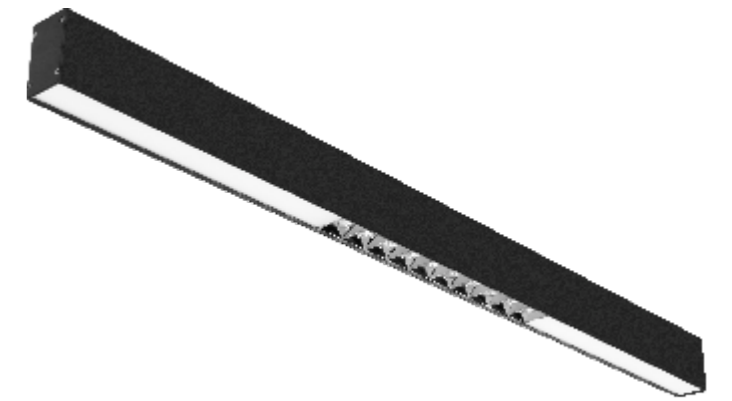

03-4678-P4L

Dimension: L1144*W46*H78MM
 Power: 48W
 Packing Size:
 Inner Box: L124.5*W11.5*H8CM
 Outer Carton: L126*W24.5*H26CM 6pcs/CTNS



03-4678-PL2

Dimension: L1144*W46*H78MM
 Power: 48W
 Packing Size:
 Inner Box: L124.5*W11.5*H8CM
 Outer Carton: L126*W24.5*H26CM 6pcs/CTNS



Model	Material	LED Chips	Driver	Dimming	Beam Angle	UGR	CRI(Ra)
03-4678-2L2	Aluminum+PC diffuser/reflector cup/PMMA	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°/15°/30°/45° optional (12/24/38/50°/Square50x50°/70x70°/Rectangle35x70°/Asymmetric optional)	19	≥80
03-4678-L4P	Aluminum+PC diffuser/reflector cup/PMMA	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°/15°/30°/45° optional (12/24/38/50°/Square50x50°/70x70°/Rectangle35x70°/Asymmetric optional)	19	≥80
03-4678-P4L	Aluminum+PC diffuser/reflector cup/PMMA	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°/15°/30°/45° optional (12/24/38/50°/Square50x50°/70x70°/Rectangle35x70°/Asymmetric optional)	19	≥80

Model	Material	LED Chips	Driver	Dimming	Beam Angle	UGR	CRI(Ra)
03-4678-LP2	Aluminum+PC diffuser/reflector cup/PMMA	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°/15°/30°/45° optional (12/24/38/50°/Square50x50°/70x70°/Rectangle35x70°/Asymmetric optional)	19	≥80
03-4678-2P2	Aluminum+PC diffuser/reflector cup/PMMA	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°/15°/30°/45° optional (12/24/38/50°/Square50x50°/70x70°/Rectangle35x70°/Asymmetric optional)	19	≥80
03-4678-PL2	Aluminum+PC diffuser/reflector cup/PMMA	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC120°/15°/30°/45° optional (12/24/38/50°/Square50x50°/70x70°/Rectangle35x70°/Asymmetric optional)	19	≥80

03-4678-2L2C

Dimension: L1144*W46*H78MM
 Power: 48W
 Packing Size:
 Inner Box: L124.5*W11.5*H8CM
 Outer Carton: L126*W24.5*H26CM 6pcs/CTNS



03-4678-LC2

Dimension: L1144*W46*H78MM
 Power: 48W
 Packing Size:
 Inner Box: L124.5*W11.5*H8CM
 Outer Carton: L126*W24.5*H26CM 6pcs/CTNS



03-4678-S4L

Dimension: L1144*W46*H78MM
 Power: 48W
 Packing Size:
 Inner Box: L124.5*W11.5*H8CM
 Outer Carton: L126*W24.5*H26CM 6pcs/CTNS



Model	Material	LED Chips	Driver	Dimming	Beam Angle	UGR	CRI(Ra)
03-4678-2L2C	Aluminum+Blind cover/ reflector cup/PMMA	OSRAM/3030	Lifud	0-10V Dimming/ DALI Dimming Optional	15°/30°/45° optional (12/ 24/38/50°/Square50x50°/70x70°/ Rectangle35x70°/Asymmetric optional)	<16	≥80
03-4678-LC2	Aluminum+Blind cover/ reflector cup/PMMA	OSRAM/3030	Lifud	0-10V Dimming/ DALI Dimming Optional	15°/30°/45° optional (12/ 24/38/50°/Square50x50°/70x70°/ Rectangle35x70°/Asymmetric optional)	<16	≥80
03-4678-S4L	Aluminum+reflector cup/ PMMA	OSRAM/3030/5050	Lifud	0-10V Dimming/ DALI Dimming Optional	15°/30°/45°, spotlight10°20°30° optional (12/24/38/50°/Square50x50°/70x70°/ Rectangle35x70°/Asymmetric optional)	<16	≥80



SUSPENDED/SURFACE MOUNTED 58100 SERIES LED LINEAR LIGHT

Our LED Modular Linear Light, ideal for both residential and commercial venues, is characterized by minimal design and elegant finishes. Based on the needs of the project it is also possible to do customized and tailor-made the projects.

Features:

- 1: It Can be suspended/surface mounted individually or in a continuous run.
- 2: Tailored type of lighting-floodlight, spotlight, Track light and blind cover.
- 3: Featured Aluminum Material with excellent heat dissipation, High brightness without stroboscopic.
- 4: Energy saving up to 50% compare to the traditional fluorescent lamp.
- 5: Variety of linear light series for optional: 3865,4678,58100 series, which can meet the needs of different occasions.
- 6: Wide Application: Office, Gallery, Shop, Home, Hotel, Restaurant, etc

* Universal Specifications:

Voltage: AC100-277V 50-60HZ Light Effect: 65-110lm/w
 Working Temperature: -30°C to 70°C IP Rate: IP20 Warranty: 3Years
 Color Temperature: 3000/4000/6000K

03-58100UD

Dimension: L1186*W58*H100MM
 Power: 65W/75W
 Packing Size:
 Inner Box: L121*W12.3*H8.2CM
 Outer carton: L130*W26*H18CM 4Pcs/CTNS




Up and Down LED Linear light



Model	Material	LED Chips	Driver	Dimming	Beam Angle	UGR	CRI(Ra)
03-58100UD	Alu+Reflector cup + PC diffuser	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC=120° Reflector Cup= 15° 24° 38° 45° 50° 40°x40° 60°x60° 35°x70° 80°x80° 80°x10°x18°	<16	≥80



03-58100

Dimension: L1186*W58*H100MM
 Power: 50W
 Packing Size:
 Inner Box: L121*W12.3*H8.2CM
 Outer carton: L130*W26*H18CM 4Pcs/CTNS

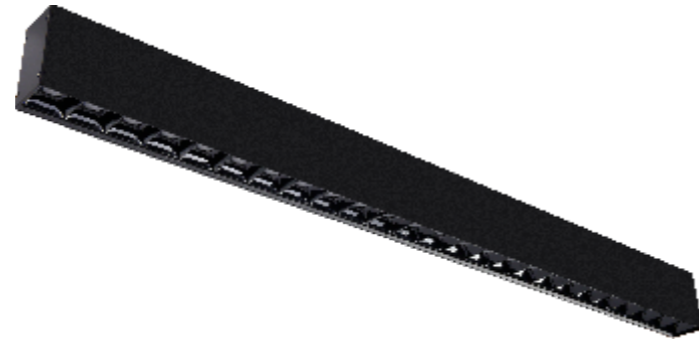

03-58100-L3P

Dimension: L1186*W58*H100MM
 Power: 50W
 Packing Size:
 Inner Box: L121*W12.3*H8.2CM
 Outer carton: L130*W26*H18CM 4Pcs/CTNS

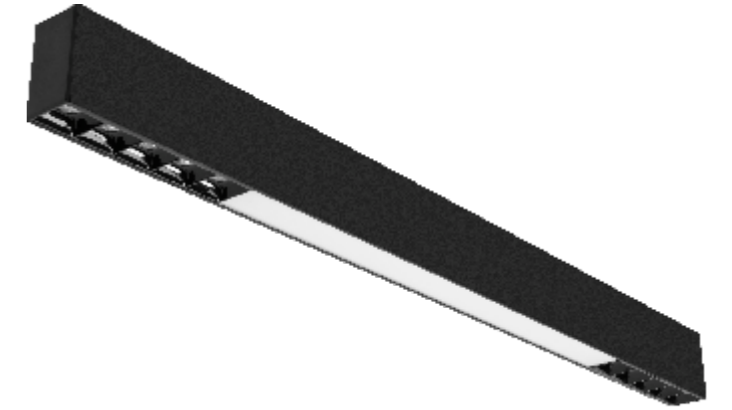

03-58100-P

Dimension: L1186*W58*H100MM
 Power: 50W
 Packing Size:
 Inner Box: L121*W12.3*H8.2CM
 Outer carton: L130*W26*H18CM 4Pcs/CTNS



03-58100-L

Dimension: L1186*W58*H100MM
 Power: 50W
 Packing Size:
 Inner Box: L121*W12.3*H8.2CM
 Outer carton: L130*W26*H18CM 4Pcs/CTNS




03-58100-L3

Dimension: L1186*W58*H100MM
 Power: 50W
 Packing Size:
 Inner Box: L121*W12.3*H8.2CM
 Outer carton: L130*W26*H18CM 4Pcs/CTNS



03-58100-LC

Dimension: L1186*W58*H100MM
 Power: 45W
 Packing Size:
 Inner Box: L121*W12.3*H8.2CM
 Outer carton: L130*W26*H18CM 4Pcs/CTNS

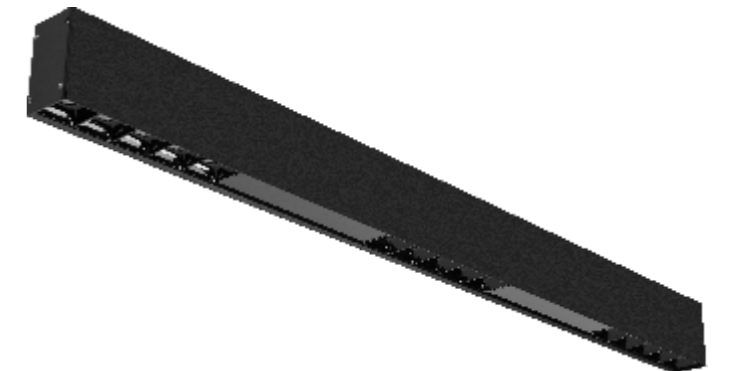

Model	Material	LED Chips	Driver	Dimming	Beam Angle	UGR	CRI(Ra)
03-58100	Alu+Reflector cup or PMMA lens	OSRAM/3030	Lifud	0-10V Dimming/ DALI Dimming Optional	Reflector Cup= 15° 24° 38° 45° 50° 40°x40° 60°x60° 35°x70° 80°x80° 80°x10°x18°	<16	≥80
03-58100-P	Alu+PC diffuser	OSRAM/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC=120°	22	≥80
03-58100-L3	Alu+PC diffuser+ Reflector cup/PMMA lens	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC=120° Reflector Cup= 15° 24° 38° 45° 50° 40°x40° 60°x60° 35°x70° 80°x80° 80°x10°x18°	19	≥80

Model	Material	LED Chips	Driver	Dimming	Beam Angle	UGR	CRI(Ra)
03-58100-L3P	Alu+PC diffuser+ Reflector cup/PMMA lens	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC=120° Reflector Cup= 15° 24° 38° 45° 50° 40°x40° 60°x60° 35°x70° 80°x80° 80°x10°x18°	19	≥80
03-58100-L	Alu+PC diffuser+ Reflector cup/PMMA lens	OSRAM/3030/2835	Lifud	0-10V Dimming/ DALI Dimming Optional	PC=120° Reflector Cup= 15° 24° 38° 45° 50° 40°x40° 60°x60° 35°x70° 80°x80° 80°x10°x18°	19	≥80
03-58100-LC	Alu+Blind cover+ Reflector cup/PMMA lens	OSRAM/3030	Lifud	0-10V Dimming/ DALI Dimming Optional	Reflector Cup= 15° 24° 38° 45° 50° 40°x40° 60°x60° 35°x70° 80°x80° 80°x10°x18°	<16	≥80