

**NEW**

**FREE COLLOCATION**

FRESH, NATURAL, CONCISE AND ELEGANT

.....

## CREATIVE MODELING STYLISH AND BEAUTIFUL

Various styles collocation



# DESIGN FOR LIFE

*I know you better*

A life circle that loves art

*Lulu Han*

Chief Experience Officer

CRYSTAL AND SOFT LIGHT



//

Nordic wind element lamp,  
stylist clues contracted and dinkum design gimmick  
each the backside  
of each concise line the connotation

**LIFE CIRCLE**


*OVERALL DESIGN*

*PROCESSION*

*Basic shape*

*FOCUS*

*The subtle details can be  
seen everywhere*

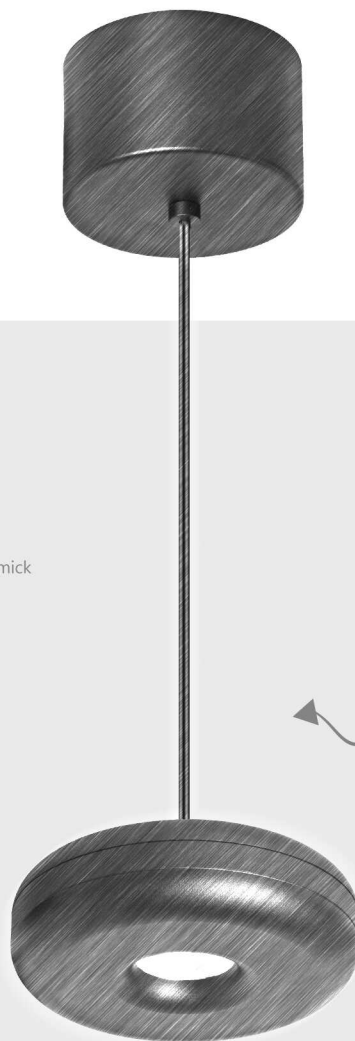

*Base shape*




*It has good corrosion resistance, rust prevention,  
anti coloration and long durability.*



## DAFA R

*There are moments in life when you miss someone so much that you just want  
to pick them from your dreams and hug them for real! Dream what you  
want to dream, go where you want to go, be what you want to be, because you  
have only one!*

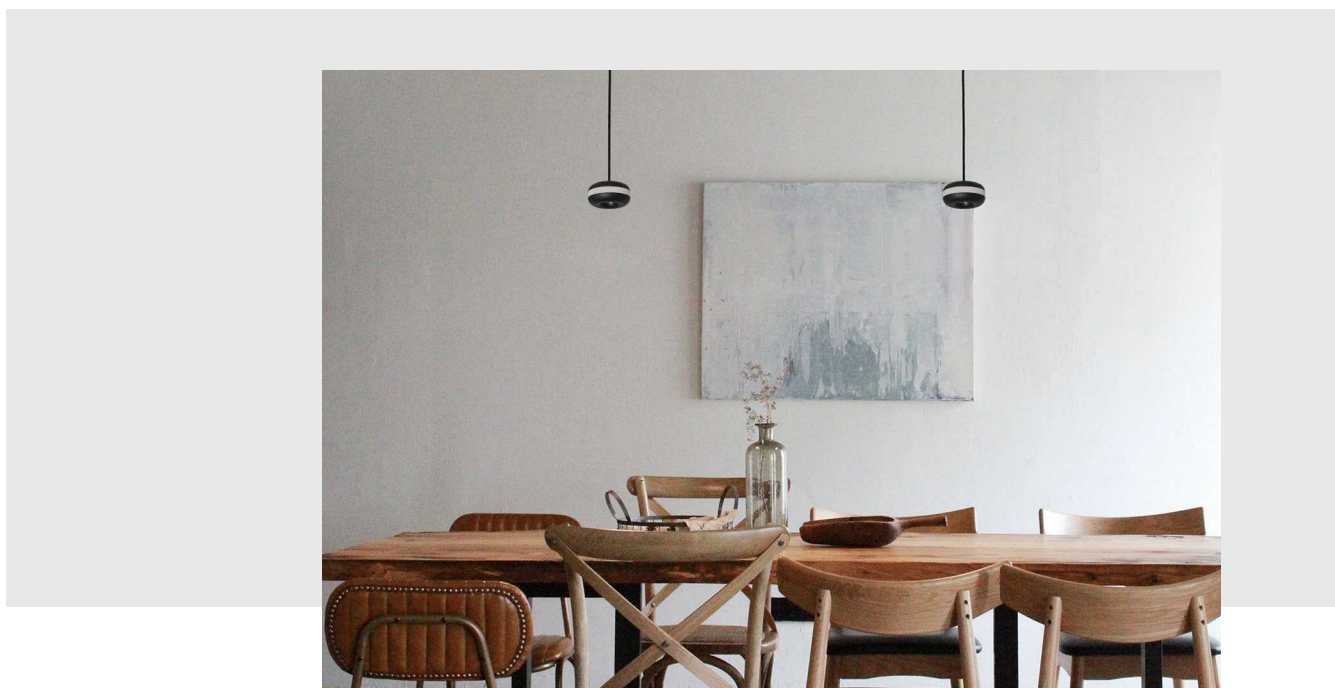

## Classical reproduction

*In view of each customer's personalization and the difference in understanding, we can give different forms of performance from various angles, create a people-oriented home environment, and create a tasteful and elegant comfortable space!*



Home lighting design atmosphere, a variety of specifications, to meet the needs of different spaces



## Northern Europe






# ATHENA

Nordic, minimalist beauty

*Don't worry about not having time to travel  
and go shopping. The soft and elegant color  
unconsciously brings us back to our hearts*



MINIMALIST

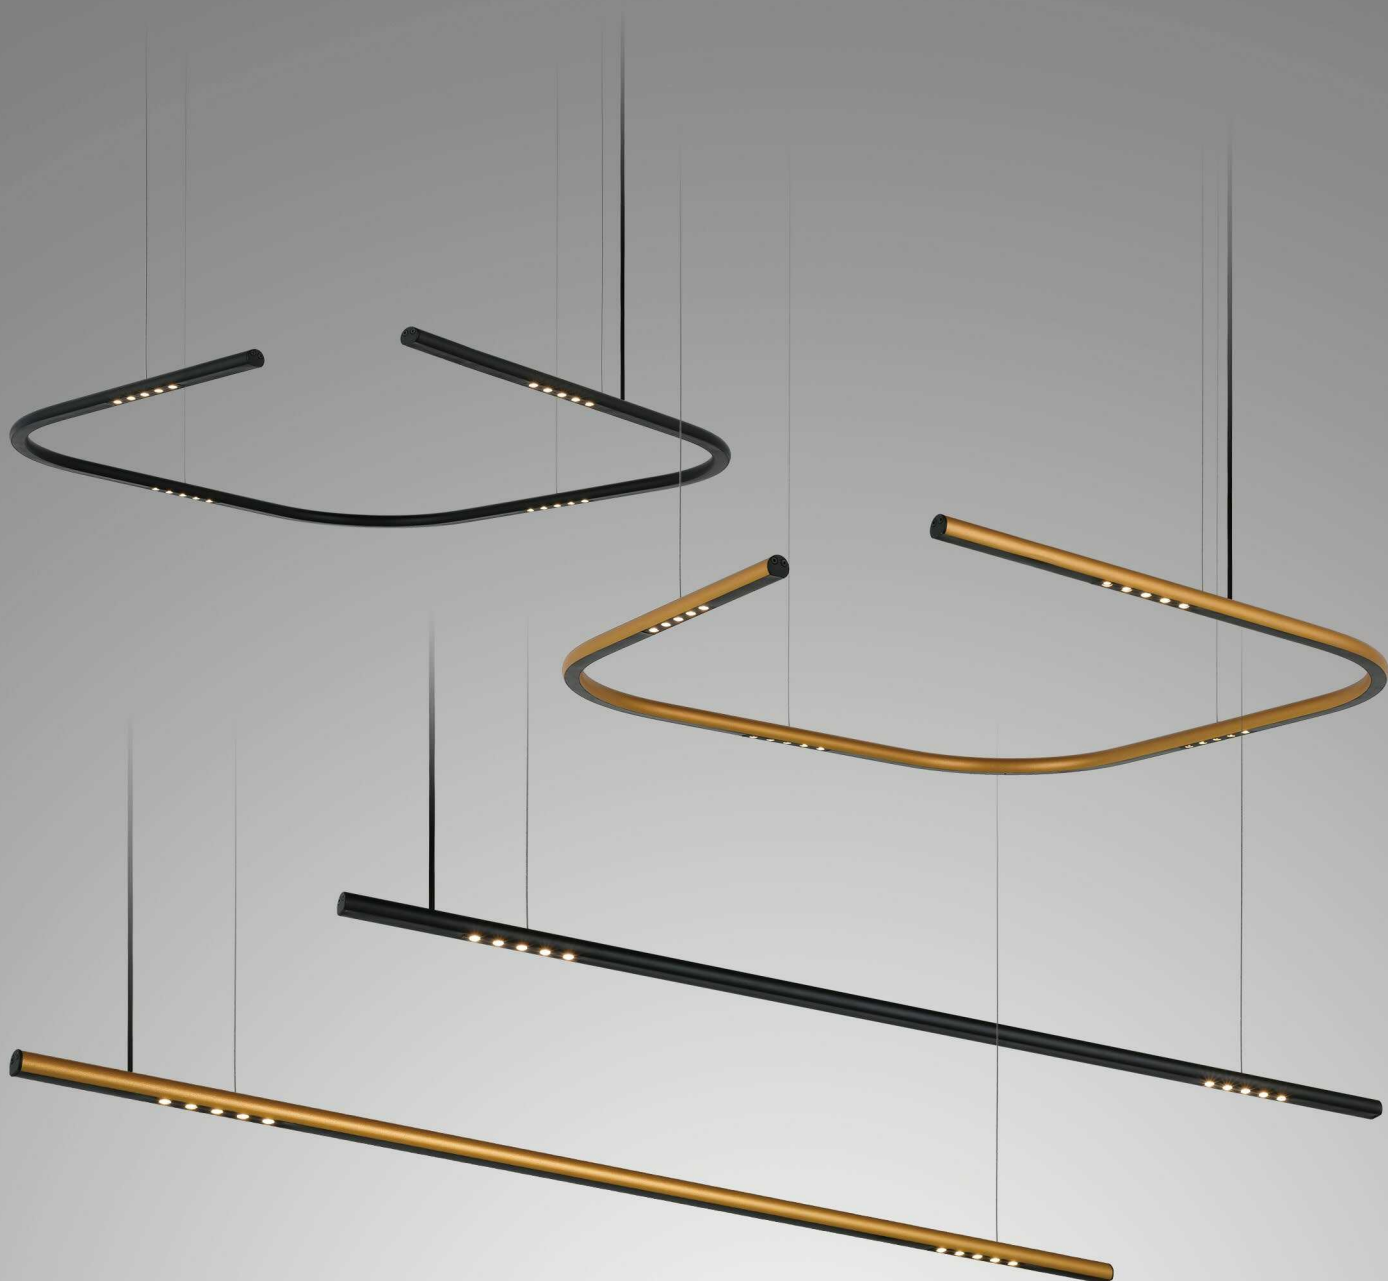

## DIFFERENT COLORS

A variety of styles and colors to create a personalized home





**Deductive**

**Nordic aesthetics  
Modern**

**Aesthetics of  
light luxury**



— luxury

## SHARP CORNERS BEAUTIFUL

If the light also has its own voice and thought, can speak and dance, then they will be willing to bloom into such a posture ~ ~ beautiful, enchanting



# QUALITY Stereo light

Made of high quality materials,  
Provide first class quality

*The simple curve, simple but not simple, winding and elegant, creates a  
kind of soft artistic light and shadow, and interprets the true light and  
color with the heart of design. The years are quiet and soft*



G E O M E T R Y



Product series

**AP-DZ-0010A-7W**



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 7W±10% Max

#### Number of LEDs

1 LEDs COB

#### Luminous Flux

476LM (3000K)

#### Main Material

Aluminum & PC Lens Diffuser

#### Color Temperature

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8


**Working Temperature** -10°C~45°C

**Beam Angle (Optional)** 45°

**Fixture Dimmable** Non-dimmable

#### Electrical

**Protection class** IP20

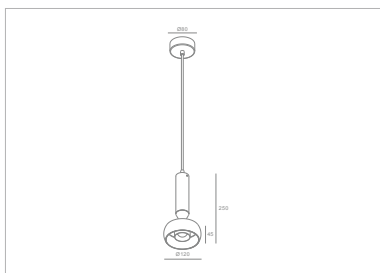

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-DZ-0010A-7W

#### Packaging Detail



64×48.5×31.5cm

STD PKG 12pcs


N.W 6.12kgs

G.W 8.8kgs


## AP-DZ-0010A-7W

DC30-42VDC7W LED 3000K/ PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A

Driver SEC: Constant Current: DC170mA




Warm White 3000K ∠45°

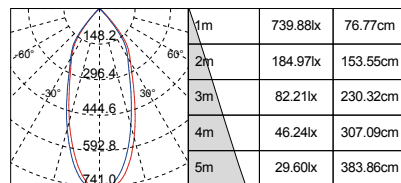

cd Height illuminance Diameter

## Option colors

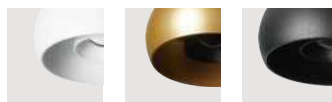

## Various Brand of COB LED Light Source:



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

### Number of LEDs

1 LEDs COB

### Luminous Flux

476LM (3000K)

### Main Material

Aluminum & PC Lens Diffuser

### Color Temperature

3000K / 4000K / 6500K

CRI ≥90

Power Factor ≥0.8


Working Temperature -10°C~45°C

Beam Angle (Optional) 45°

Fixture Dimmable Non-dimmable

### Electrical

Protection class IP20

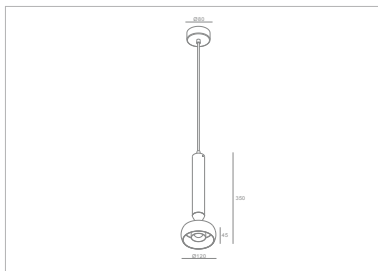

### Especially designed for:


Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0011A-7W	
Packaging Detail	64×48.5×41.5cm	
	STD PKG	12pcs
	N.W	7.08kgs
	G.W	10.51kgs

## AP-DZ-0011A-7W

DC30-42VDC7W LED 3000K/ PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A  
Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠45°

1m	739.88lx	76.77cm
2m	184.97lx	153.55cm
3m	82.21lx	230.32cm
4m	46.24lx	307.09cm
5m	29.60lx	383.86cm

cd Height illuminance Diameter

### Option colors



### Various Brand of COB LED Light Source:





Product series

**AP-DZ-0014A-7W**





## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 7W±10% Max

#### Number of LEDs

1 LEDs COB

#### Luminous Flux

476LM (3000K)

#### Main Material

Aluminum & PC Lens Diffuser

#### Color Temperature

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8

**Working Temperature** -10°C~45°C


**Beam Angle (Optional)** 45°

**Fixture Dimmable** Non-dimmable

#### Electrical

**Protection class** IP20

Internal Driver

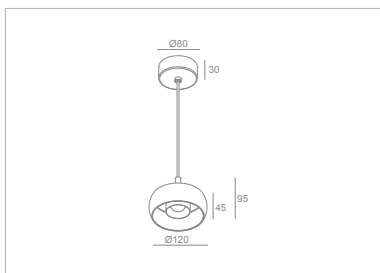

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-DZ-0014A-7W

#### Packaging Detail



50×33.5×39cm

STD PKG 12pcs

N.W 6.06kgs

G.W 8.06kgs


## AP-DZ-0014A-7W

DC30-42VDC7W LED 3000K/ PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A

Driver SEC: Constant Current: DC170mA




Warm White 3000K ∠45°

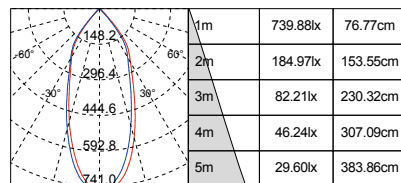

cd Height illuminance Diameter

## Option colors



## Various Brand of COB LED Light Source:





Product series

**AP-DZ-0040A-18W**



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	18W±10% Max


<b>Number of LEDs</b>
10LEDs SMT

<b>Luminous Flux</b>
1206LM (3000K)

<b>Main Material</b>
Aluminum & Silica Gel

<b>Color Temperature</b>
3000K / 4000K / 6500K

<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.92
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	20°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20

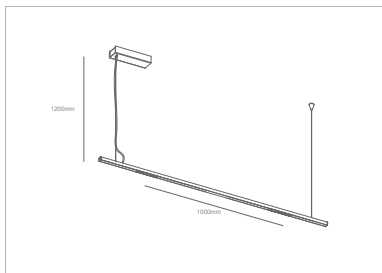

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



<b>Product Model No.</b>	AP-DZ-0040A-18W	
<b>Packaging Detail</b>	125.5×20×20cm	
	STD PKG	4pcs
	N.W	3.2kgs
	G.W	6.68kgs

## AP-DZ-0040A-18W

DC27-42VDC18W LED 3000K/ PRI:1206lm220-240/ incl.V~50/60 Hz 0.120A

Driver SEC: Constant Current: DC500mA

### Various Brand of SMT LED Light Source:



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	25W±10% Max


<b>Number of LEDs</b>
15 LEDs SMT

<b>Luminous Flux</b>
1675LM (3000K)

<b>Main Material</b>
Aluminum & Silica Gel

<b>Color Temperature</b>
3000K / 4000K / 6500K

<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.92
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	20°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20

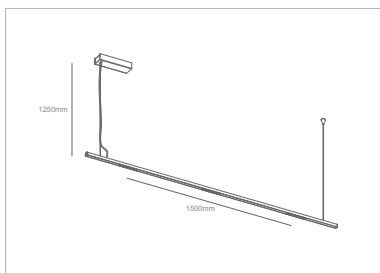

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



<b>Product Model No.</b>	AP-DZ-0041A-25W	
<b>Packaging Detail</b>	175.5×20×20cm	
	STD PKG	4pcs
	N.W	3.6kgs
	G.W	8.8kgs

## AP-DZ-0041A-25W

DC30-42VDC25W LED 3000K/ PRI:1675lm220-240/ incl.V~50/60 Hz 0.170A  
Driver SEC: Constant Current: DC750mA

### Various Brand of SMT LED Light Source:



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	35W±10% Max


<b>Number of LEDs</b>
20 LEDs SMT

<b>Luminous Flux</b>
2345LM (3000K)

<b>Main Material</b>
Aluminum & Silica Gel

<b>Color Temperature</b>
3000K / 4000K / 6500K

<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.92
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	20°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20

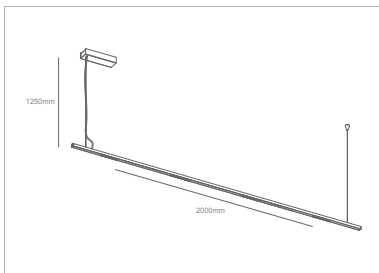

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



<b>Product Model No.</b>	AP-DZ-0042A-35W	
<b>Packaging Detail</b>	225.5×20×20cm	
	STD PKG	4pcs
	N.W	4.4kgs
	G.W	10.8kgs

## AP-DZ-0042A-35W

DC25-36VDC35W LED 3000K/ PRI:2345lm220-240/ incl.V~50/60 Hz 0.22A  
Driver SEC: Constant Current: DC1050mA

### Various Brand of SMT LED Light Source:







Product series

**AP-DZ-0043A-20W**



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	20W±10% Max


<b>Number of LEDs</b>
20LEDs SMT

<b>Luminous Flux</b>
1340LM (3000K)

<b>Main Material</b>
Aluminum & Silica Gel

<b>Color Temperature</b>
3000K / 4000K / 6500K

<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.92
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	20°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20

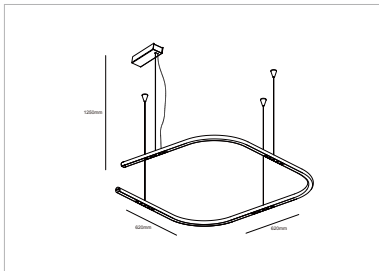

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



<b>Product Model No.</b>	AP-DZ-0043A-20W	
<b>Packaging Detail</b> 	70×70×6.5cm	
	STD PKG	1pcs
	N.W	1.15kgs
	G.W	2.63kgs

## AP-DZ-0043A-20W

DC27-42VDC20W LED 3000K/ PRI:1340lm220-240/ incl.V~50/60 Hz 0.20A  
Driver SEC: Constant Current: DC500mA

### Various Brand of SMT LED Light Source:



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	32W±10% Max


<b>Number of LEDs</b>
20 LEDs SMT

<b>Luminous Flux</b>
2144LM (3000K)

<b>Main Material</b>
Aluminum & Silica Gel

<b>Color Temperature</b>
3000K / 4000K / 6500K


<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.92
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	20°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20

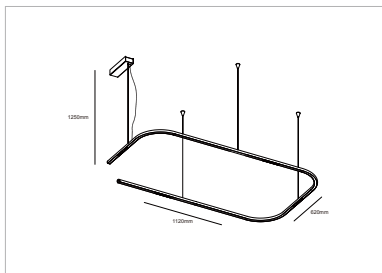

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



<b>Product Model No.</b>	AP-DZ-0044A-32W	
<b>Packaging Detail</b> 	120×70×6.5cm	
	STD PKG	1pcs
	N.W	1.5kgs
	G.W	3.56kgs

## AP-DZ-0044A-32W

DC27-40VDC32W LED 3000K/ PRI:2144lm220-240/ incl.V~50/60 Hz 0.20A  
Driver SEC: Constant Current: DC900mA

### Various Brand of SMT LED Light Source:



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	35W±10% Max


<b>Number of LEDs</b>
30 LEDs SMT

<b>Luminous Flux</b>
2345LM (3000K)

<b>Main Material</b>
Aluminum & Silica Gel

<b>Color Temperature</b>
3000K / 4000K / 6500K


<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.92
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	20°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20

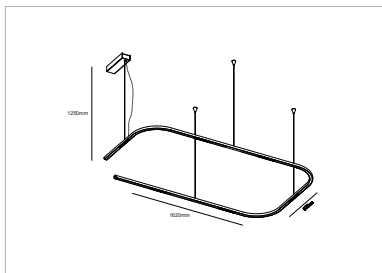

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



<b>Product Model No.</b>	AP-DZ-0045A-35W	
<b>Packaging Detail</b> 	170×70×6.5cm	
	STD PKG	1pcs
	N.W	1.77kgs
	G.W	4.5kgs


## AP-DZ-0045A-35W

DC25-36VDC35W LED 3000K/ PRI:2345lm220-240/ incl.V~50/60 Hz 0.22A  
Driver SEC: Constant Current: DC1050mA

### Various Brand of SMT LED Light Source:





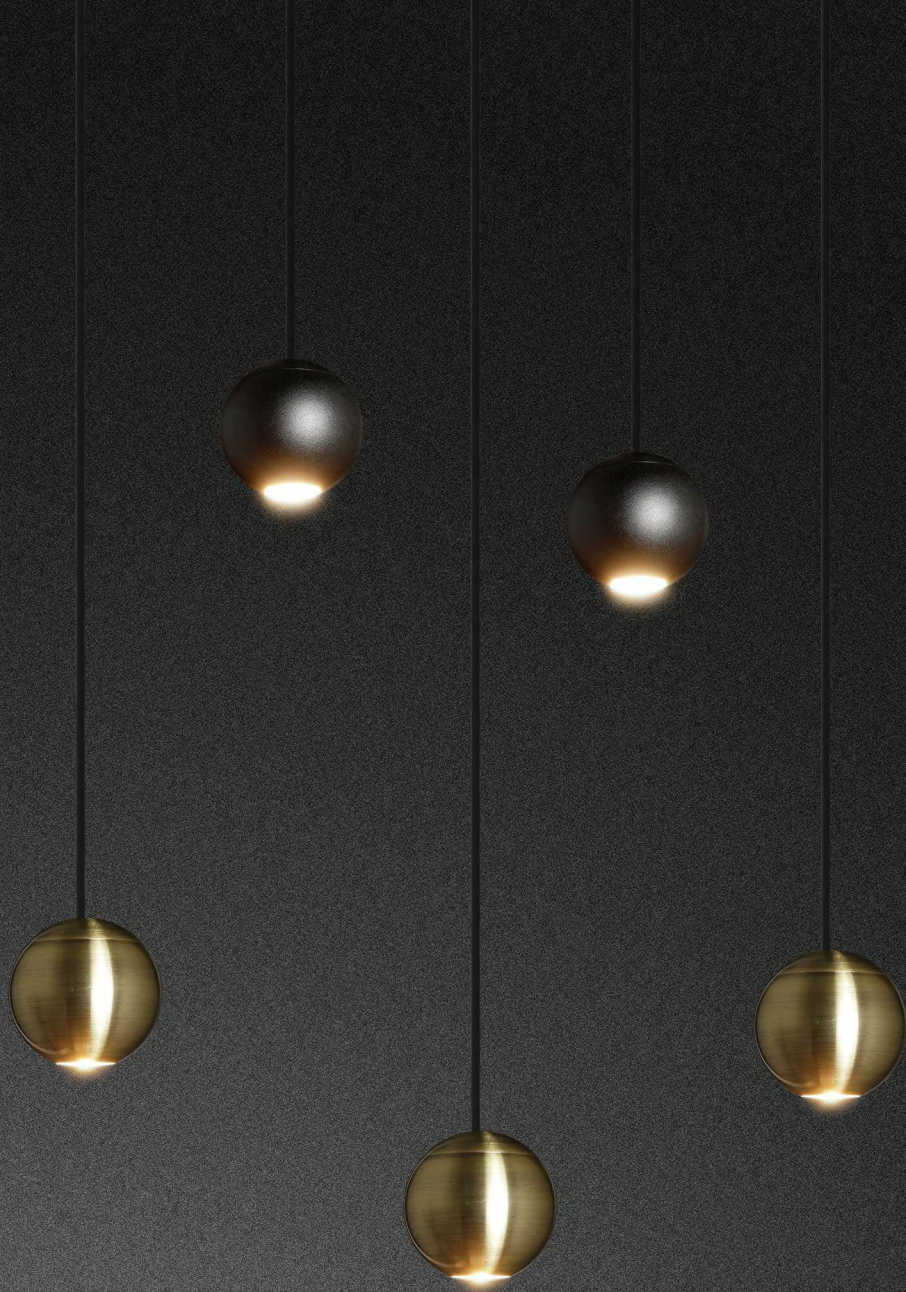

Product series

AP-DZ-0050A-7W





## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
357LM (3000K)

Main Material
Aluminum & PC Lens Diffuser

Color Temperature
3000K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	18°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

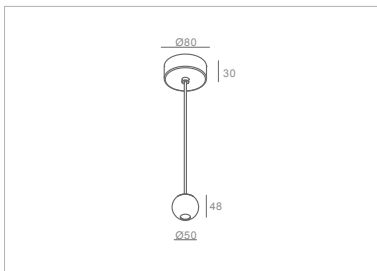

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0050A-7W	
Packaging Detail	51.5×21.5×30.5cm	
	STD PKG	30pcs
	N.W	10.2kgs
	G.W	13.2kgs

## AP-DZ-0050A-7W

DC8-12V7W LED 3000KDC / PRI:357lm220-240/ incl. V~50/60 Hz 0.050A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 18°

	1m	2099.99lx	33.47cm
	2m	525.00lx	66.94cm
	3m	233.33lx	100.41cm
	4m	131.25lx	133.87cm
	5m	84.00lx	167.34cm
	cd	Height	illuminance
		Diameter	

## Option colors



## Various Brand of COB LED Light Source:



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 7W±10% Max

**Number of LEDs**

1 LEDs COB

**Luminous Flux**

287LM (3000K)

**Main Material**

Aluminum & PC Lens Diffuser

**Color Temperature**

3000K

**CRI** ≥90

**Power Factor** ≥0.8


**Working Temperature** -10°C~45°C

**Beam Angle (Optional)** 18°

**Fixture Dimmable** Non-dimmable

**Electrical**

**Protection class** IP20

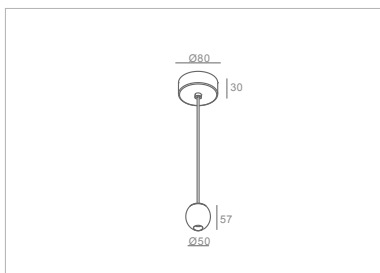

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-DZ-0051A-7W

**Packaging Detail** 51.5×21.5×30.5cm



STD PKG 30pcs

N.W 10.8kgs

G.W 13.8kgs


## AP-DZ-0051A-7W

DC8-12V7W LED 3000KDC / PRI:287lm220-240/ incl. V~50/60 Hz 0.050A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 18°

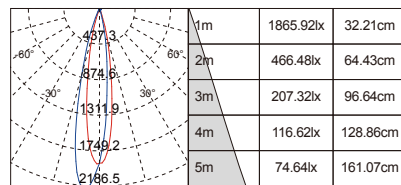

cd Height illuminance Diameter

## Option colors



## Various Brand of COB LED Light Source:





Product series

**AP-DZ-0060A-15W**



## LED PENDANT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max


Number of LEDs
75 LEDs SMD

Luminous Flux
1221LM (3000K)

Main Material
Iron & PMMA

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

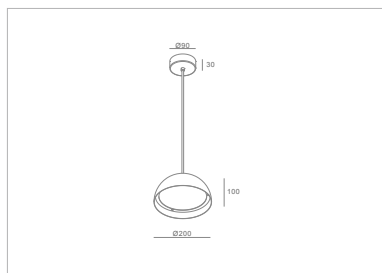

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0060A-15W	
Packaging Detail	53×53×42cm	
	STD PKG	8pcs
	N.W	8.8kgs
	G.W	12.64kgs

## AP-DZ-0060A-15W

DC30-42VDC15W LED 3000K/ PRI:1221lm220-240/ incl.V~50/60 Hz

Driver SEC: Constant Current: DC360mA



Warm White 3000K ∠110°

	1m	499.54lx	253.70cm
	2m	124.89lx	507.40cm
	3m	55.50lx	761.10cm
	4m	31.22 lx	1014.80cm
	5m	19.98lx	1268.49cm
cd	Height	illuminance	Diameter

### Various Brand of SMD LED Light Source:



## LED PENDANT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	30W±10% Max


Number of LEDs	150LEDs SMD
----------------	-------------

Luminous Flux	2594LM (3000K)
---------------	----------------

Main Material	Iron & PMMA
---------------	-------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

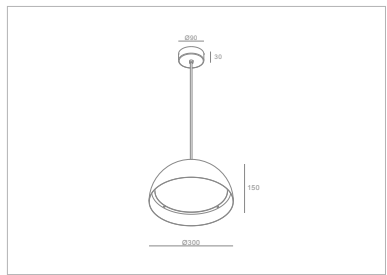

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0061A-30W	
Packaging Detail	36.5×36×25.5cm	
	STD PKG	1pcs
	N.W	1.87kgs
	G.W	2.7kgs

## AP-DZ-0061A-30W

DC30-42VDC30W LED 3000K/ PRI:2594lm220-240/ incl.V~50/60 Hz

Driver SEC: Constant Current: DC750mA



Warm White 3000K ∠110°

Height	1m	2m	3m	4m	5m
illuminance	1056.64lx	264.16lx	117.40lx	66.04lx	42.27lx
Diameter	252.79cm	505.58cm	758.37cm	1011.16cm	1263.95cm

cd

### Various Brand of SMD LED Light Source:



## LED PENDANT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	50W±10% Max


Number of LEDs	
250 LEDs SMD	

Luminous Flux	
4430LM (3000K)	

Main Material	
Iron & PMMA	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.95
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

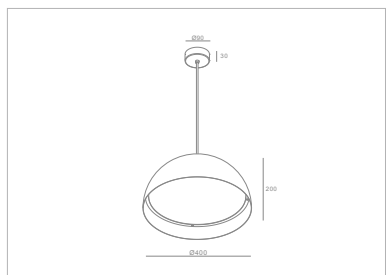

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0062A-50W	
Packaging Detail	46.5×46×30.5cm	
	STD PKG	1pcs
	N.W	3.14kgs
	G.W	4.48kgs

## AP-DZ-0062A-50W

DC30-42VDC50W LED 3000K/ PRI:4430lm220-240/ incl.V~50/60 Hz  
Driver SEC: Constant Current: DC1.3A



Warm White 3000K ∠110°

1m	1840.67lx	243.92cm
2m	460.17lx	487.84cm
3m	204.52lx	731.75cm
4m	115.04lx	975.67cm
5m	73.63lx	1219.59cm

cd Height illuminance Diameter

### Various Brand of SMD LED Light Source:





Product series

**AP-DZ-0070A-7W**



## LED PENDANT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs	
1 LEDs COB	

Luminous Flux	
325LM (3000K)	

Main Material	
Aluminum & PC Lens Diffuser	

Color Temperature	
3000K	

CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	18°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

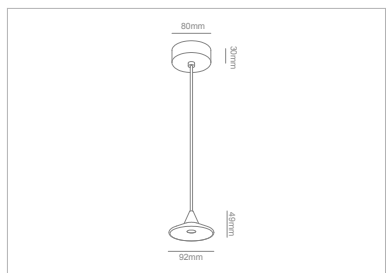

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0070A-7W	
Packaging Detail 	45×41×41cm	
	STD PKG	18pcs
	N.W	6.63kgs
	G.W	9kgs

## AP-DZ-0070A-7W

DC8-12V7W LED 3000KDC / PRI:325lm220-240/ incl. V~50/60 Hz 0.050A  
Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 18°

	1m	2519.69lx	30.96cm
	2m	629.92lx	61.92 cm
	3m	279.97lx	92.88 cm
	4m	157.48lx	123.85 cm
	5m	100.79lx	154.81 cm
cd	Height	illuminance	Diameter


## Option colors



## Various Brand of COB LED Light Source:





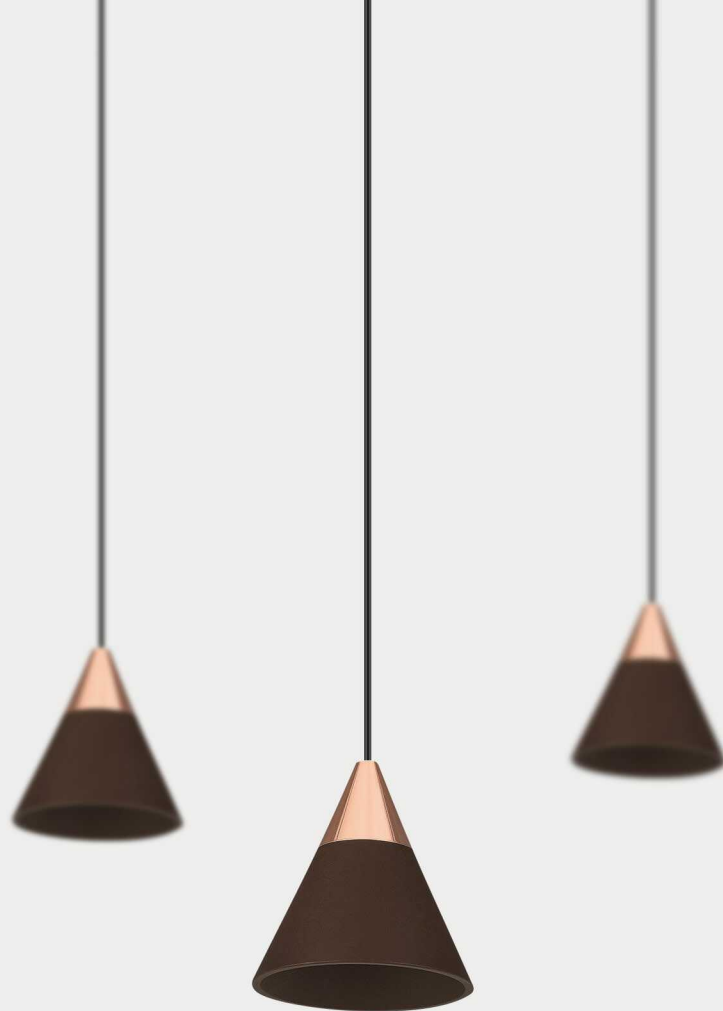

Product series

**AP-DZ-0071A-7W**



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 7W±10% Max

#### Number of LEDs

1 LEDs COB

#### Luminous Flux

305LM (3000K)

#### Main Material

Aluminum & PC Lens Diffuser

#### Color Temperature

3000K

**CRI** ≥80

**Power Factor** ≥0.8


**Working Temperature** -10°C~45°C

**Beam Angle (Optional)** 18°

**Fixture Dimmable** Non-dimmable

#### Electrical

**Protection class** IP20

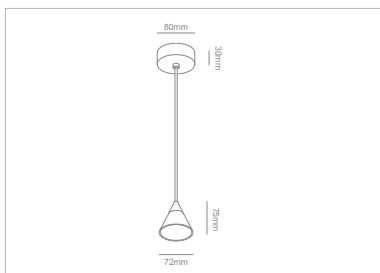

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-DZ-0071A-7W

**Packaging Detail** 45×41×41cm



STD PKG 18pcs

N.W 5.8kgs

G.W 7.5kgs


## AP-DZ-0071A-7W

DC8-12VDC7W LED 3000K/ PRI:305lm220-240/ incl.V~-50/60 Hz 0.050A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 18°

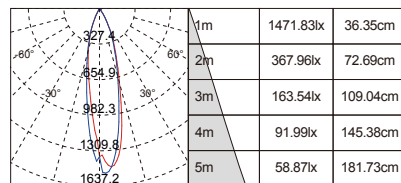

cd Height illuminance Diameter

### Various Brand of COB LED Light Source:







Product series

AP-DZ-0072-7W





## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 7W±10% Max

**Number of LEDs**

1 LED COB

**Luminous Flux**

375LM (3000K)

**Main Material**

Aluminum & PC Lens Diffuser

**Color Temperature**

3000K

**CRI** ≥90

**Power Factor** ≥0.8


**Working Temperature** -10°C~45°C

**Beam Angle (Optional)** 18°

**Fixture Dimmable** Non-dimmable

**Electrical**

**Protection class** IP20

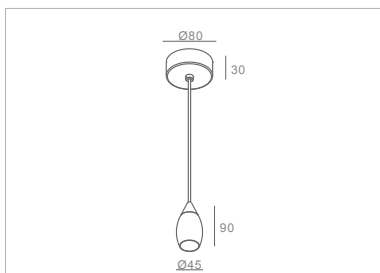

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-DZ-0072-7W

**Packaging Detail** 45×45×41cm



STD PKG 18pcs

N.W 6.34kgs

G.W 9.34kgs


## AP-DZ-0072-7W

DC30-42V7W LED 3000KDC / PRI:375lm220-240/ incl. -V~ 50/60 Hz 0.050A

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠ 18°

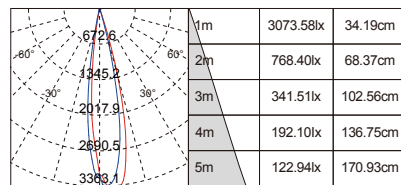

cd Height illuminance Diameter

## Option colors



## Various Brand of COB LED Light Source:



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs
1 LED COB

Luminous Flux
486LM (3000K)

Main Material
Aluminum & PC Lens Diffuser

Color Temperature
3000K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	18°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

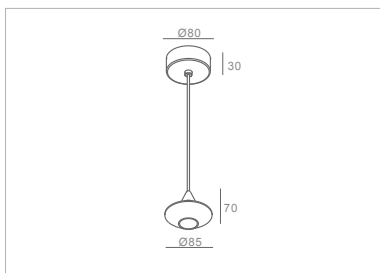

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0073-7W	
Packaging Detail	45×45×41cm	
	STD PKG	12pcs
	N.W	9.13kgs
	G.W	12.13kgs

## AP-DZ-0073-7W

DC30-42V7W LED 3000KDC / PRI:486lm220-240/ incl. -V~ 50/60 Hz 0.050A  
Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠ 18°

	1m	3083.4lx	35.81cm
	2m	770.85lx	71.61cm
	3m	342.60lx	107.42cm
	4m	192.71lx	143.22cm
	5m	123.34lx	179.03cm
	cd	Height	illuminance
		illuminance	Diameter

## Option colors



## Various Brand of COB LED Light Source:





Product series

**AP-DZ-0090-7W**



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 7W±10% Max

**Number of LEDs**

1 LED COB

**Luminous Flux**

476LM (3000K)

**Main Material**

Aluminum & PC Lens Diffuser

**Color Temperature**

3000K

**CRI** ≥90

**Power Factor** ≥0.8

**Working Temperature** -10°C~45°C


**Beam Angle (Optional)** 24°

**Fixture Dimmable** Non-dimmable

**Electrical**

Internal Driver

**Protection class** IP20

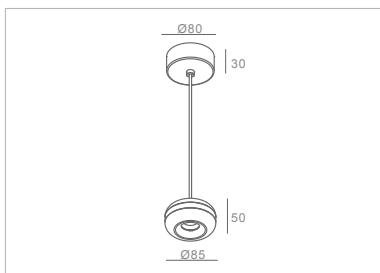

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-DZ-0090-7W

**Packaging Detail** 39.5×26.5×30cm



STD PKG 12pcs

N.W 5kgs

G.W 6.5kgs


## AP-DZ-0090-7W

DC30-42V7W LED 3000KDC / PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠ 24°

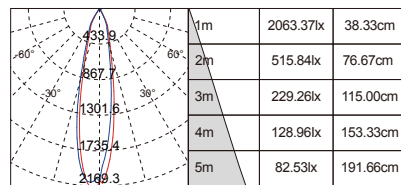

cd Height illuminance Diameter

## Option colors



## Various Brand of COB LED Light Source:





## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs
1 LED COB

Luminous Flux
766LM (3000K)

Main Material
Aluminum & PC Lens Diffuser

Color Temperature
3000K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	25°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

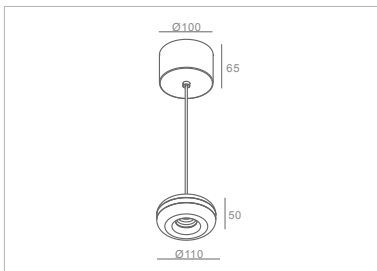

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0091-10W	
Packaging Detail	33×32.5×37cm	
	STD PKG	8pcs
	N.W	5.42kgs
	G.W	7.4kgs




## AP-DZ-0091-10W

DC30-42V7W LED 3000KDC / PRI:766lm220-240/ incl. -V~ 50/60 Hz 0.065A  
Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠ 25°

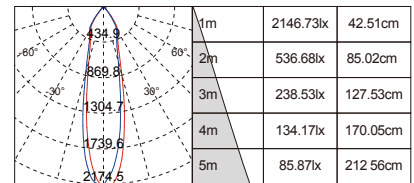

cd Height illuminance Diameter

### Option colors



### Various Brand of COB LED Light Source:



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 15W±10% Max

**Number of LEDs**

1 LED COB

**Luminous Flux**

965LM (3000K)

**Main Material**

Aluminum & PC Lens Diffuser

**Color Temperature**

3000K

**CRI** ≥90

**Power Factor** ≥0.92

**Working Temperature** -10°C~45°C


**Beam Angle (Optional)** 25°

**Fixture Dimmable** Non-dimmable

**Electrical**

Internal Driver

**Protection class** IP20

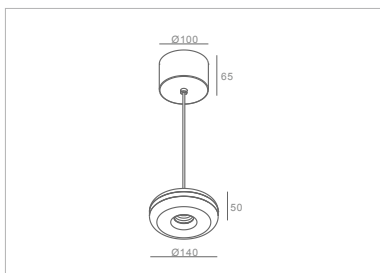

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-DZ-0092-15W

**Packaging Detail** 39.5×38.5×37cm



STD PKG 8pcs

N.W 7.23kgs


G.W 9kgs

## AP-DZ-0092-15W

7WDC30-42VLED 3000KDC / 965lmPRI: 220-240/ incl. -  
DriverV~ 50/60SEC:HzConstant0.088A Current: DC360mA



Warm White 3000K ∠ 25°

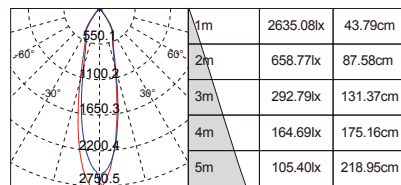

cd Height illuminance Diameter

### Option colors



### Various Brand of COB LED Light Source:





Product series

**AP-DZ-0120A-15W**



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
1275LM (3000K)

Main Material
Iron & PMMA

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	65°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP44

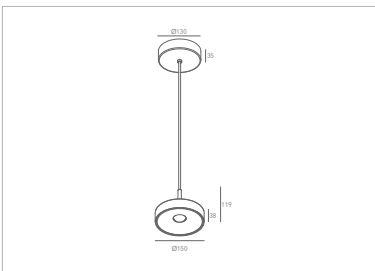

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0120A-15W	
Packaging Detail	56×38×39.5cm	
	STD PKG	18pcs
	N.W	18kgs
	G.W	20kgs

## AP-DZ-0120A-15W

DC30-42VDC15W LED 3000K/ PRI:1275lm220-240/ incl.V~50/60 Hz 0.088A  
Driver SEC: Constant Current: DC360mA



Warm White 3000K ∠65°

	1m	1325.02lx	100.37cm
	2m	331.25lx	200.74cm
	3m	147.22lx	301.11cm
	4m	82.81lx	401.48cm
	5m	53.00lx	501.85cm
	cd	Height	illuminance
Diameter			

### Various Brand of COB LED Light Source:



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
1275LM (3000K)

Main Material
Iron & PMMA

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	65°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver

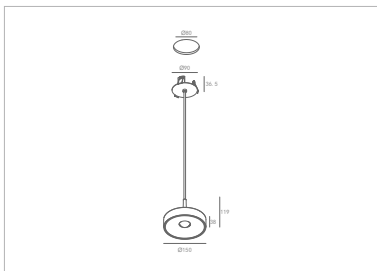

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0121A-15W	
Packaging Detail	56×38×39.5cm	
	STD PKG	18pcs
	N.W	13.86kgs
	G.W	15.86kgs

## AP-DZ-0121A-15W

DC30-42VDC15W LED 3000K/ PRI:1275lm220-240/ incl.V~50/60 Hz 0.088A

Driver SEC: Constant Current: DC360mA



Warm White 3000K ∠65°

1m	1325.02lx	100.37cm
2m	331.25lx	200.74cm
3m	147.22lx	301.11cm
4m	82.81lx	401.48cm
5m	53.00lx	501.85cm

cd Height illuminance Diameter

### Various Brand of COB LED Light Source:



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	24W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
2040LM (3000K)

Main Material
Iron & PMMA

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	65°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP44

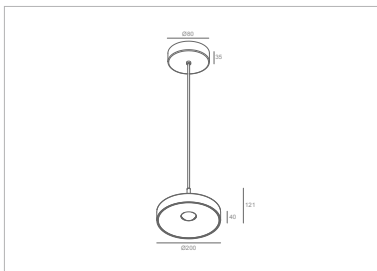

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0122A-24W	
Packaging Detail	48×48×39.5cm	
	STD PKG	12pcs
	N.W	14.76kgs
	G.W	16.76kgs

## AP-DZ-0122A-24W

DC27-40VDC30W LED 3000K/ PRI:2040lm220-240/ incl.V~50/60 Hz 0.135A  
Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠65°

	1m	1840.67lx	243.92cm
	2m	460.17lx	487.84cm
	3m	204.52lx	731.75cm
	4m	115.04lx	975.67cm
	5m	73.63lx	1219.59cm
	cd	Height	illuminance
		Diameter	

### Various Brand of COB LED Light Source:



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	24W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
2040LM (3000K)

Main Material
Iron & PMMA

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	65°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP44

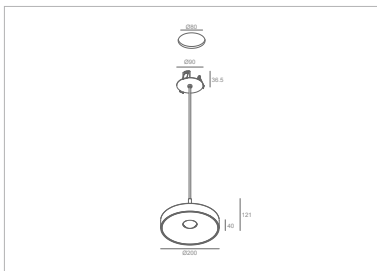

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0123A-24W
Packaging Detail	48×48×39.5cm
	STD PKG 12pcs
	N.W 13.2kgs
	G.W 15.2kgs

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠65°

1m	1840.67lx	243.92cm
2m	460.17lx	487.84cm
3m	204.52lx	731.75cm
4m	115.04lx	975.67cm
5m	73.63lx	1219.59cm

cd Height illuminance Diameter

## AP-DZ-0123A-24W

DC27-40VDC30W LED 3000K/ PRI:2040lm220-240/ incl.V~50/60 Hz 0.135A

### Various Brand of COB LED Light Source:





## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 30W±10% Max

**Number of LEDs**

1 LEDs COB

**Luminous Flux**

2550LM (3000K)

**Main Material**

Iron & PMMA

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.92


**Working Temperature** -10°C~45°C

**Beam Angle (Optional)** 65°

**Fixture Dimmable** Non-dimmable

**Electrical**

**Protection class** IP44

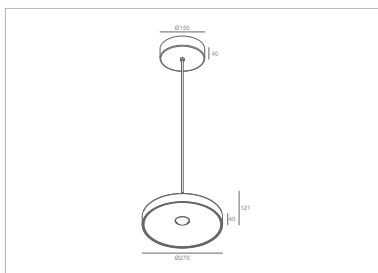

**Product Model No.** AP-DZ-0124A-30W

**Packaging Detail** 62×62×28cm



STD PKG 8pcs

N.W 13.6kgs

G.W 15.6kgs


## AP-DZ-0124A-30W

DC30-42VDC30W LED 3000K/ PRI:2550lm220-240/ incl.V~50/60 Hz 0.170A

Driver SEC: Constant Current: DC750mA



Warm White 3000K ∠65°

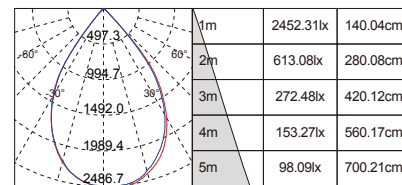

cd Height illuminance Diameter

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



### Various Brand of COB LED Light Source:



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 30W±10% Max

**Number of LEDs**

1 LEDs COB

**Luminous Flux**

2550LM (3000K)

**Main Material**

Iron & PMMA

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.92


**Working Temperature** -10°C~45°C

**Beam Angle (Optional)** 65°

**Fixture Dimmable** Non-dimmable

**Electrical**

**Protection class** IP44

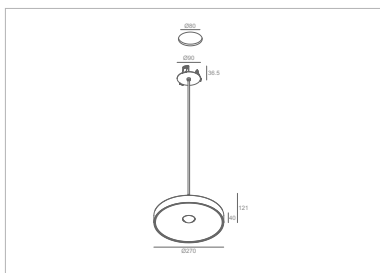

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-DZ-0125A-30W

**Packaging Detail** 62×62×28cm



STD PKG 8pcs

N.W 12kgs

G.W 14kgs


## AP-DZ-0125A-30W

DC30-42VDC30W LED 3000K/ PRI:2550lm220-240/ incl.V~50/60 Hz 0.170A

Driver SEC: Constant Current: DC750mA



Warm White 3000K ∠65°

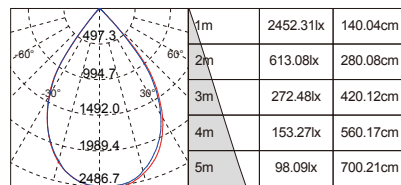


cd Height illuminance Diameter

### Various Brand of COB LED Light Source:




Product series

# AP-DZ-0130A-24W

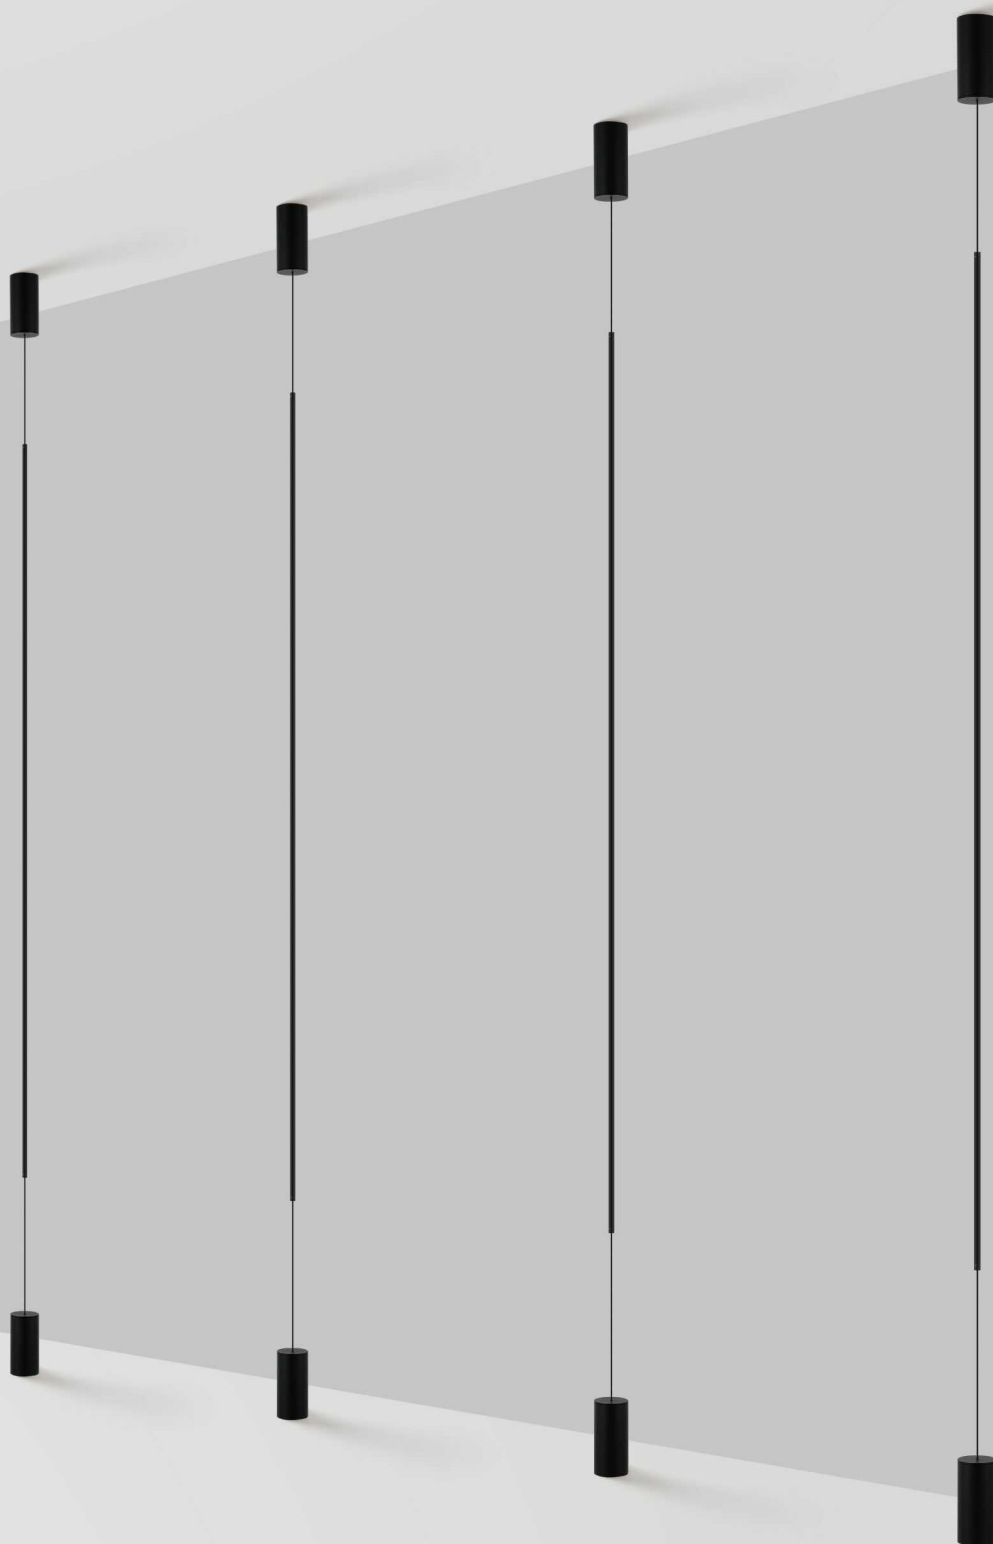


LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	24W±10% Max
Number of LEDs	
144 LEDs SMD	
Luminous Flux	
65LM/W	
Main Material	
Aluminum & Silica Gel	
Color Temperature	
3000K / 4000K / 6500K	
CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

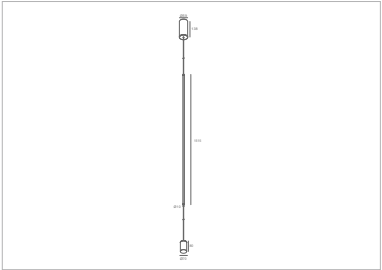

**Especially designed for:**  
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



CE	RoHS	REACH	UL	CCC	ETL	UL	UL	UL	UL
Product Model No.		AP-DZ-0130A-24W							
Packaging Detail		9×8.3×160cm							
		STD PKG	1pcs						
		N.W	1.15kgs						
		G.W	2.63kgs						

**AP-DZ-0130A-24W**  
24WPRI: 220-240LED 3000KV~ 50/6065LM/WHz /0.135Aincl. -  
Driver SEC: Constant Current: DC600mA


Various Brand of SMD LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	15W±10% Max
<b>Number of LEDs</b>	96 LEDs SMD
<b>Luminous Flux</b>	65LM/W (3000K)
<b>Main Material</b>	Aluminum & Silica Gel
<b>Color Temperature</b>	3000K / 4000K / 6500K
<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.92
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	20°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20

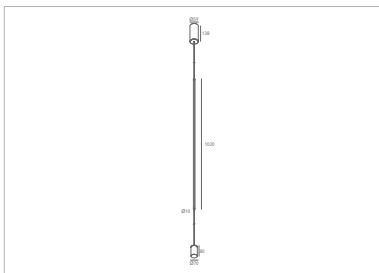

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



<b>Product Model No.</b>	AP-DZ-0131A-15W	
<b>Packaging Detail</b>	9×8.3×110cm	
	STD PKG	1pcs
	N.W	1.5kgs
	G.W	3.56kgs

## AP-DZ-0131A-15W

15WPRI: 220-240LED 3000KV~ 50/6065LM/WHz /0.088Aincl. - Driver SEC: Constant Current: DC600mA


### Various Brand of SMD LED Light Source:






LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	24W±10% Max
Number of LEDs	
144 LEDs SMD	
Luminous Flux	
65LM/W (3000K)	
Main Material	
Aluminum & Silica Gel	
Color Temperature	
3000K / 4000K / 6500K	
CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

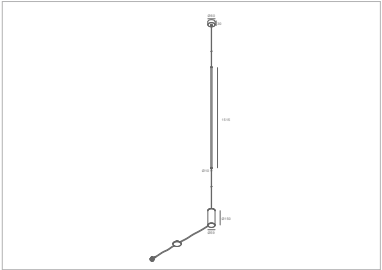

**Especially designed for:**  
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



CE	House	Dimmer	RoHS	REACH	RoHS	RoHS	RoHS	RoHS	RoHS
Product Model No.		AP-DZ-0132A-24W							
Packaging Detail		9×8.3×160cm							
		STD PKG	1pcs						
		N.W	1.77kgs						
		G.W	4.5kgs						

**AP-DZ-0132A-24W**  
24WPRI: 220-240LED 3000KV~ 50/6065LM/WHz /0.135Aincl. - Driver SEC: Constant Current: DC600mA

Various Brand of SMD LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	15W±10% Max

<b>Number of LEDs</b>
96 LEDs SMD

<b>Luminous Flux</b>
65LM/W (3000K)

<b>Main Material</b>
Aluminum & Silica Gel

<b>Color Temperature</b>
3000K / 4000K / 6500K

<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.92
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	20°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20



### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



<b>Product Model No.</b>	AP-DZ-0133A-15W	
<b>Packaging Detail</b>	9×8.3×110cm	
	STD PKG	1pcs
	N.W	1.5kgs
	G.W	3.56kgs

## AP-DZ-0133A-15W

15WPRI: 220-240LED 3000KV~ 50/6065LM/WHz /0.088Aincl. - Driver SEC: Constant Current: DC600mA

### Various Brand of SMD LED Light Source:





Product series

AP-DZ-0140A-10W



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 10W±10% Max

**Number of LEDs**

3 LEDs COB

**Luminous Flux**

686LM (3000K)

**Main Material**

Aluminum & PC Lens Diffuser

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.92

**Working Temperature** -10°C~45°C


**Beam Angle (Optional)** 15°

**Fixture Dimmable** Non-dimmable

**Electrical**

Internal Driver

**Protection class** IP20

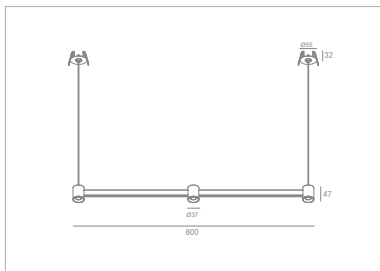

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-DZ-0140A-10W

**Packaging Detail** 98×8.5×9.5cm

STD PKG 1pcs

N.W 0.7kgs

G.W 2.7kgs


## AP-DZ-0140A-10W

DC36V10W LEDDC3000K/ PRI: 686lm220-240/ incl.V~ 50/60-Hz

Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠ 15°

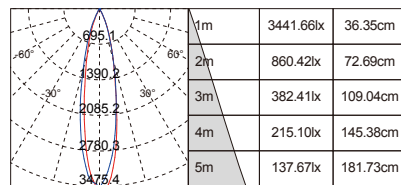

cd Height illuminance Diameter

### Option colors



### Various Brand of COB LED Light Source:



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 10W±10% Max

**Number of LEDs**

3 LEDs COB

**Luminous Flux**

686LM (3000K)

**Main Material**

Aluminum & PC Lens Diffuser

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.92

**Working Temperature** -10°C~45°C


**Beam Angle (Optional)** 15°

**Fixture Dimmable** Non-dimmable

**Electrical**


Internal Driver

**Protection class** IP20

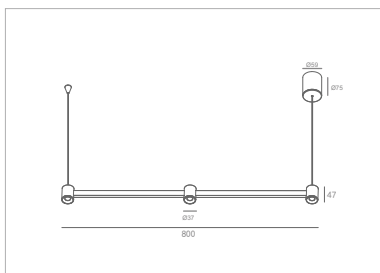


### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-DZ-0141A-10W

**Packaging Detail** 98×8.5×9.5cm



STD PKG 1pcs

N.W 0.8kgs

G.W 2.8kgs


## AP-DZ-0141A-10W

DC36V10W LEDDC3000K/ PRI: 686lm220-240/ incl.V~ 50/60-Hz

Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠ 15°

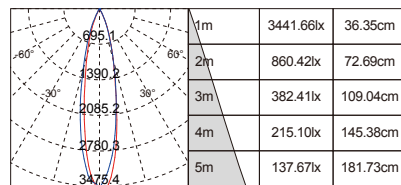

cd Height illuminance Diameter

## Option colors



## Various Brand of COB LED Light Source:



## LED PENDANT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max


Number of LEDs	4 LEDs COB
----------------	------------

Luminous Flux	912LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------


Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	15°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

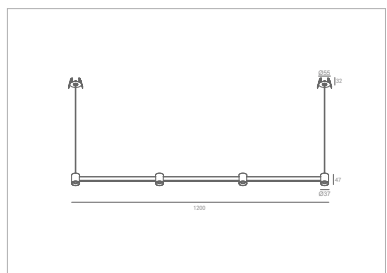

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0142A-15W	
Packaging Detail	138×8.5×9.5cm	
	STD PKG	1pcs
	N.W	0.92kgs
	G.W	2.92kgs

## AP-DZ-0142A-15W

15WDC36VLEDDC3000K/ PRI: 912lm220-240/ incl.V~ -50/60DriverHzSEC: Constant Current: DC360mA



Warm White 3000K ∠ 15°

	1m	3441.66lx	36.35cm
	2m	860.42lx	72.69cm
	3m	382.41lx	109.04cm
	4m	215.10lx	145.38cm
	5m	137.67lx	181.73cm

cd Height illuminance Diameter

## Option colors



## Various Brand of COB LED Light Source:



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max

#### Number of LEDs

4 LEDs COB

#### Luminous Flux

912LM (3000K)

#### Main Material

Aluminum & PC Lens Diffuser

#### Color Temperature

3000K / 4000K / 6500K

CRI ≥90

Power Factor ≥0.92


Working Temperature -10°C~45°C

Beam Angle (Optional) 15°

Fixture Dimmable Non-dimmable


Electrical Internal Driver

Protection class IP20

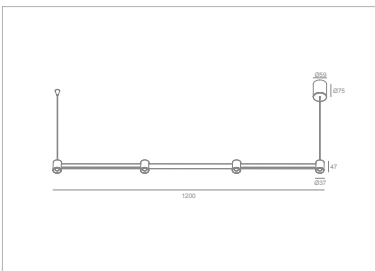


### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0143A-15W	
Packaging Detail	138×8.5×9.5cm	
	STD PKG	1pcs
	N.W	1.02kgs
	G.W	3.02kgs



## AP-DZ-0143A-15W

15WDC36VLEDDC3000K/ PRI: 912lm220-240/ incl.V~ -50/60DriverHzSEC: Constant Current: DC360mA



Warm White 3000K ∠ 15°

1m	3441.66lx	36.35cm
2m	860.42lx	72.69cm
3m	382.41lx	109.04cm
4m	215.10lx	145.38cm
5m	137.67lx	181.73cm

cd Height illuminance Diameter

### Option colors



### Various Brand of COB LED Light Source:





## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	20W±10% Max


Number of LEDs
5 LEDs COB

Luminous Flux
1140LM (3000K)

Main Material
Aluminum & PC Lens Diffuser


Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	15°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

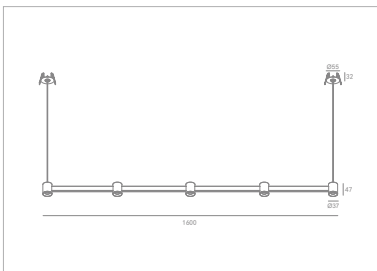

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0144A-20W
Packaging Detail	178×8.5×9.5cm
STD PKG	1pcs
N.W	1.14kgs
G.W	3.14kgs

## AP-DZ-0144A-20W

DC36V15W LEDDC3000K/ PRI: 1140m220-240/ incl.V~ 50/60-Hz

Driver SEC: Constant Current: DC500mA



Warm White 3000K ∠ 15°

1m	3441.66lx	36.35cm
2m	860.42lx	72.69cm
3m	382.41lx	109.04cm
4m	215.10lx	145.38cm
5m	137.67lx	181.73cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

### Option colors




### Various Brand of COB LED Light Source:



## LED PENDANT LIGHT


TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	16W±10% Max
Number of LEDs	5 LEDs COB
Luminous Flux	1140LM (3000K)
Main Material	Aluminum & PC Lens Diffuser
Color Temperature	3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	15°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

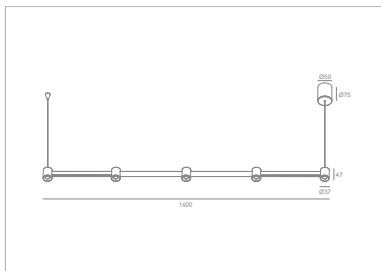

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0145A-16W	
Packaging Detail	178×8.5×9.5cm	
	STD PKG	1pcs
	N.W	1.24kgs
	G.W	3.24kgs

## AP-DZ-0145A-16W

DC36V16W LEDDC3000K/ PRI: 1140lm220-240/ V~incl.50/60-Hz

Driver SEC: Constant Current: DC400mA



Warm White 3000K ∠ 15°

1m	3441.66lx	36.35cm
2m	860.42lx	72.69cm
3m	382.41lx	109.04cm
4m	215.10lx	145.38cm
5m	137.67lx	181.73cm

cd Height illuminance Diameter

## Option colors



## Various Brand of COB LED Light Source:





Product series

**AP-DZ-0150A-7W**



## LED PENDANT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	411LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K
-------------------	-------


CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

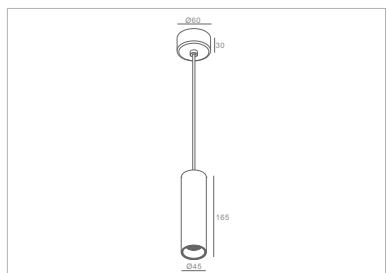

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0150A-7W	
Packaging Detail 	50.5×28×21.5cm	
	STD PKG	24pcs
	N.W	9.9kgs
	G.W	11.9kgs

## AP-DZ-0150A-7W

DC30-42V7W LED 3000KDC / PRI:411lm220-240/ incl. -V~ 50/60 Hz 0.050A  
Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠ 24°

	1m	2404.12lx	41.60cm
	2m	601.03lx	83.20cm
	3m	267.12lx	124.80cm
	4m	150.26lx	166.40cm
	5m	96.16lx	208.00cm
cd	Height	illuminance	Diameter

## Option colors



## Various Brand of COB LED Light Source:



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max


Number of LEDs
1 LED COB

Luminous Flux
859LM (3000K)

Main Material
Aluminum & PC Lens Diffuser

Color Temperature
3000K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

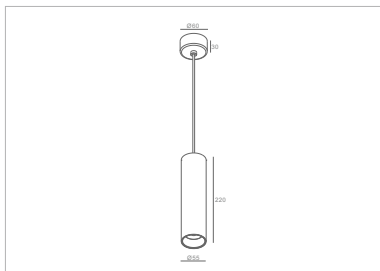

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0151A-15W	
Packaging Detail	35×33.5×28cm	
	STD PKG	20pcs
	N.W	10.6kgs
	G.W	12.6kgs




## AP-DZ-0151A-15W

15W LED 3000K 859lm / incl. - Driver SEC: Constant Current:  
DC360mA/450mADC30-42V DC / PRI: 220-240 V~ 50/60 Hz 0.088A



Warm White 3000K ∠ 24°

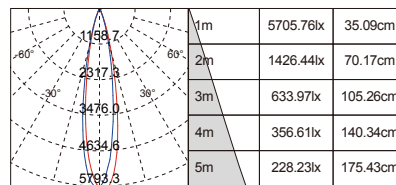

cd Height illuminance Diameter

### Option colors



### Various Brand of COB LED Light Source:



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs
1 LED COB

Luminous Flux
413LM (3000K)

Main Material
Aluminum & PC Lens Diffuser

Color Temperature
3000K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

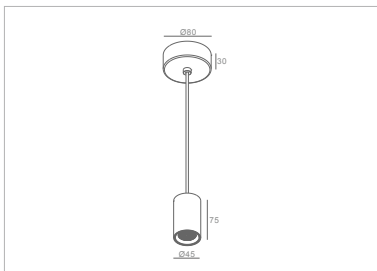

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0153A-7W	
Packaging Detail	45×41×41cm	
	STD PKG	18pcs
	N.W	4.95kgs
	G.W	6.95kgs

## AP-DZ-0153A-7W

DC30-42V7W LED 3000KDC / PRI:413m220-240/ incl. -V~ 50/60 Hz 0.050A  
Driver SEC: Constant Current: DC170mA




Warm White 3000K ∠ 24°

1m	2105.40lx	43.61cm
2m	526.35lx	87.21cm
3m	233.93lx	130.82cm
4m	131.59lx	174.43cm
5m	84.22lx	218.04cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

## Option colors



## Various Brand of COB LED Light Source:





Product series

**AP-DZ-0160A-30W**





## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	30W±10% Max


Number of LEDs
35 LEDs SMD

Luminous Flux
938LM (3000K)

Main Material
Aluminum & Soundproof cotton

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	60°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

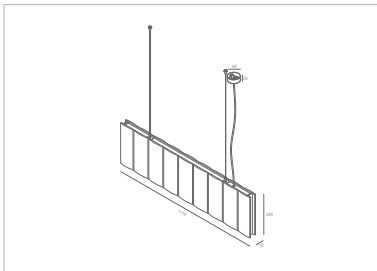


### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0160A-30W	
Packaging Detail	124.5×37.5×10.5cm	
	STD PKG	1pcs
	N.W	3.3kgs
	G.W	4.5kgs



## AP-DZ-0160A-30W

30WDC27-40VDCLED 3000K/ PRI:938lm220-240/ incl. V~ Driver50/60SEC:Hz 0.2AConstant Current: DC900mA



Warm White 3000K ∠60°

	1m	3229.70lx	85.31cm
	2m	807.43lx	170.61cm
	3m	358.86lx	255.92cm
	4m	201.86lx	341.23cm
	5m	129.19lx	426.54cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

### Option colors



### Various Brand of SMD LED Light Source:





Product series

**AP-DZ-0170A-6W**



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	6W±10% Max

#### Number of LEDs

1 LEDs COB

#### Luminous Flux

515LM (3000K)

#### Main Material

Aluminum & PMMA

#### Color Temperature

3000K / 4000K / 6500K

CRI ≥90

Power Factor ≥0.8

Working Temperature -10°C~45°C


Beam Angle (Optional) 45°

Fixture Dimmable Non-dimmable

#### Electrical

Protection class IP20

Internal Driver

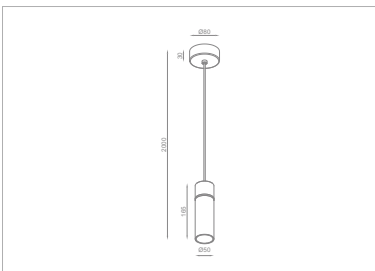

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0170A-6W	
Packaging Detail	36×28×45.5cm	
	STD PKG	18pcs
	N.W	15.9kgs
	G.W	17.4kgs



## AP-DZ-0170A-6W

DC18V6W LEDDC3000K/ PRI:515lm220-240/ incl.V~50/60 Hz  
Driver SEC: Constant Current: DC300mA



Warm White 3000K ∠45°

	1m	701.32lx	104.56cm
	2m	175.33lx	209.11cm
	3m	77.92lx	313.67cm
	4m	43.83lx	418.23cm
	5m	28.05lx	522.79cm
	cd	Height	illuminance Diameter

### Various Brand of COB LED Light Source:





Product series

**AP-DZ-0171A-6W**



## LED PENDANT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs	
1 LEDs COB	

Luminous Flux	
375LM (3000K)	

Main Material	
Aluminum & PMMA	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	15° / 45°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

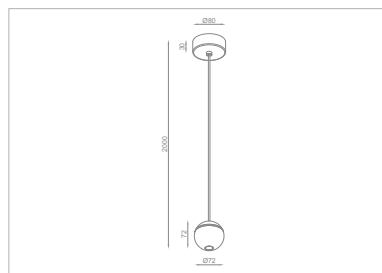

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0171A-6W	
Packaging Detail	36×28×26.5cm	
	STD PKG	18pcs
	N.W	16.32kgs
	G.W	18.32kgs

## AP-DZ-0171A-6W

DC18V6W LEDDC3000K/ PRI:375lm220-240/ incl.V~50/60 Hz

Driver SEC: Constant Current: DC300mA



Warm White 3000K ∠15°

Height	1m	2m	3m	4m	5m
illuminance	3073.58lx	768.40lx	341.51lx	192.10lx	122.94lx
Diameter	34.19cm	68.37cm	102.56cm	136.75cm	170.93cm

## Option colors



## Various Brand of COB LED Light Source:





Product series

**AP-DZ-0172A-6W**





## LED PENDANT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs	
1 LEDs COB	

Luminous Flux	
375LM (3000K)	

Main Material	
Aluminum & PMMA	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	15° / 45°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

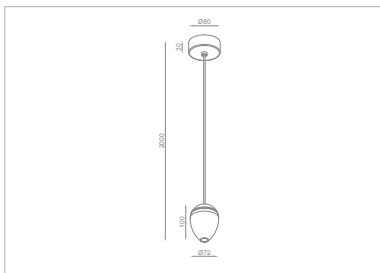

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0172A-6W	
Packaging Detail	36×28×26.5cm	
	STD PKG	18pcs
	N.W	16.32kgs
	G.W	18.32kgs

## AP-DZ-0172A-6W

DC18V6W LEDDC3000K/ PRI:375lm220-240/ incl.V~-50/60 Hz

Driver SEC: Constant Current: DC300mA



Warm White 3000K ∠15°


	1m	3073.58lx	34.19cm
	2m	768.40lx	68.37cm
	3m	341.51lx	102.56cm
	4m	192.10lx	136.75cm
	5m	122.94lx	170.93cm
cd	Height	illuminance	Diameter

### Option colors



### Various Brand of COB LED Light Source:



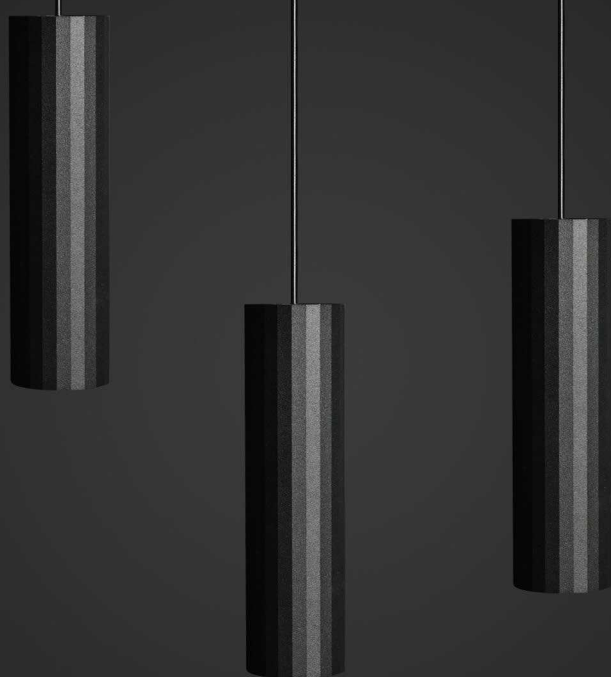

Product series

AP-DZ-0180A-12W



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 12W±10% Max

**Number of LEDs**

1 LEDs COB

**Luminous Flux**

822LM (3000K)

**Main Material**

Aluminum & PC Lens Diffuser

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8


**Working Temperature** -10°C~45°C

**Beam Angle (Optional)** 24°

**Fixture Dimmable** Non-dimmable

**Electrical**

**Protection class** IP20

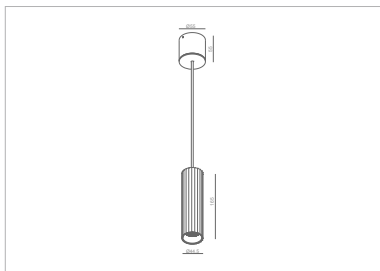

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-DZ-0180A-12W

**Packaging Detail** 51.5×43×34.5cm



STD PKG 24pcs

N.W 7.32kgs

G.W 9.32kgs


## AP-DZ-0180A-12W

DC28-42VDC12W LED 3000K/ PRI:822lm220-240/ incl.V~50/60 Hz 0.18A

Driver SEC: Constant Current: DC300mA




Warm White 3000K ∠ 24°

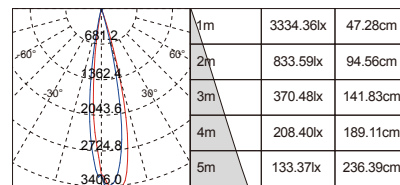

cd Height illuminance Diameter

## Option colors



## Various Brand of COB LED Light Source:





Product series

**AP-DZ-0210A-10W**



## LED PENDANT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs	
24 LEDs SMD	

Luminous Flux	
750LM (3000K)	

Main Material	
Aluminum & Glass	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

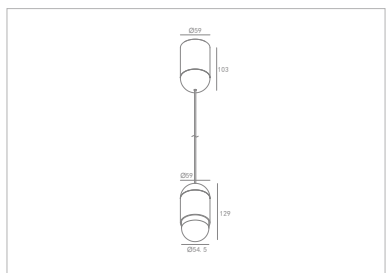

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0210A-10W	
Packaging Detail	48.5×33×46.5cm	
	STD PKG	24pcs
	N.W	16.32kgs
	G.W	18.32kgs

## AP-DZ-0210A-10W

DC36V10W LEDDC3000K/ PRI: 750lm220-240/ incl.V~ 50/60-Hz

Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠110°

	1m	165.24lx	765.07cm
	2m	41.31lx	1530.15cm
	3m	18.36lx	2295.22cm
	4m	10.33lx	3060.30cm
	5m	6.61lx	3825.37cm
cd	Height	illuminance	Diameter

## Option colors



## Various Brand of SMD LED Light Source:





Product series

**AP-DZ-0200A-10W**





## LED PENDANT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs	
1 LEDs COB	

Luminous Flux	
680LM (3000K)	

Main Material	
Aluminum & PC	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.55
Working Temperature	-10°C~45°C
Beam Angle (Adjustable)	15°-60°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

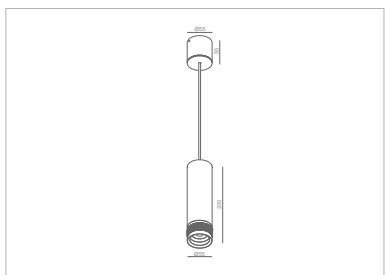

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0200A-10W	
Packaging Detail	47×45.5×34.5cm	
	STD PKG	24pcs
	N.W	15.36kgs
	G.W	17.36kgs

## AP-DZ-0200A-10W

DC28-42VDC10W LED 3000K/

PRI:680lm220-240/ incl.V~50/60 Hz 0.15A

Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠15°

	1m	7649.07lx	24.03cm
	2m	1912.27lx	48.05cm
	3m	849.90lx	72.08cm
	4m	478.07lx	96.10cm
	5m	305.96lx	120.13cm
cd	Height	illuminance	Diameter

## Option colors



## Various Brand of COB LED Light Source:





Product series

AP-DZ-0211A-10W



## LED PENDANT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs	
24 LEDs SMD	

Luminous Flux	
722LM (3000K)	

Main Material	
Aluminum & Glass	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

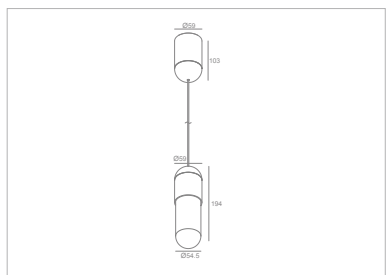

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0211A-10W	
Packaging Detail	47×47×34cm	
	STD PKG	18pcs
	N.W	14.04kgs
	G.W	16.04kgs

## AP-DZ-0211A-10W

DC28-42VDC10W LED 3000K/ PRI:722lm220-240/ incl.V~50/60 Hz 0.12A

Driver SEC: Constant Current: DC200mA



Warm White 3000K ∠110°

	1m	91.81lx	876.76cm
	2m	22.95lx	1753.52cm
	3m	10.20lx	2630.28cm
	4m	5.74lx	3507.04cm
	5m	3.67lx	4383.80cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

## Option colors



## Various Brand of SMD LED Light Source:





Product series

**AP-DZ-0212A-10W**



## LED PENDANT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs
24 LEDs SMD

Luminous Flux
722LM (3000K)

Main Material
Aluminum & Glass

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

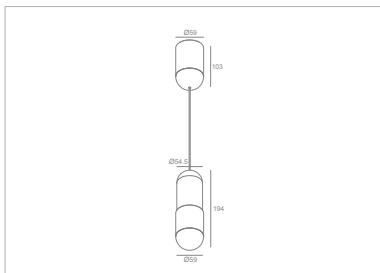

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0212A-10W	
Packaging Detail	47×47×34cm	
	STD PKG	18pcs
	N.W	14.04kgs
	G.W	16.04kgs

## AP-DZ-0212A-10W

DC28-42VDC10W LED 3000K/ PRI:722lm220-240/ incl.V~50/60 Hz 0.12A  
Driver SEC: Constant Current: DC200mA



Warm White 3000K ∠110°

	1m	91.81lx	876.76cm
	2m	22.95lx	1753.52cm
	3m	10.20lx	2630.28cm
	4m	5.74lx	3507.04cm
	5m	3.67lx	4383.80cm
cd	Height	illuminance	Diameter

## Option colors



## Various Brand of SMD LED Light Source:





Product series

**AP-DZ-0213A-10W**



## LED PENDANT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs
24 LEDs SMD

Luminous Flux
662LM (3000K)

Main Material
Aluminum & Glass

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

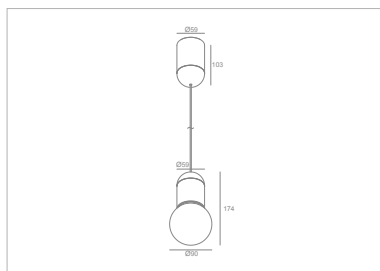

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0213A-10W	
Packaging Detail	71×48×40cm	
	STD PKG	18pcs
	N.W	14.63kgs
	G.W	16.63kgs

## AP-DZ-0213A-10W

DC28-42VDC10W LED 3000K/ PRI:662lm220-240/ incl.V~50/60 Hz 0.12A  
Driver SEC: Constant Current: DC200mA



Warm White 3000K ∠110°

1m	171.87lx	642.13cm
2m	42.97lx	1284.25cm
3m	19.10lx	1926.38cm
4m	10.74lx	2568.50cm
5m	6.87lx	3210.63cm

cd Height illuminance Diameter

## Option colors



## Various Brand of SMD LED Light Source:







Product series

**AP-DZ-0214A-10W**



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs
24 LEDs SMD

Luminous Flux
662LM (3000K)

Main Material
Aluminum & Glass

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

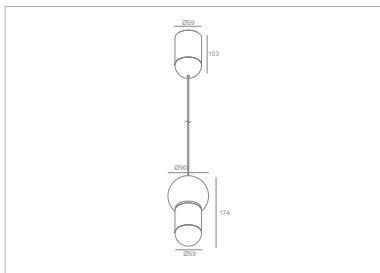

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0214A-10W	
Packaging Detail	71×48×40cm	
	STD PKG	18pcs
	N.W	14.63kgs
	G.W	16.63kgs

## AP-DZ-0214A-10W

DC28-42VDC10W LED 3000K/ PRI:662lm220-240/ incl.V~50/60 Hz 0.12A  
Driver SEC: Constant Current: DC200mA



Warm White 3000K ∠110°

Height	1m	2m	3m	4m	5m
illuminance	171.87lx	42.97lx	19.10lx	10.74lx	6.87lx
Diameter	642.13cm	1284.25cm	1926.38cm	2568.50cm	3210.63cm


cd

## Option colors



## Various Brand of SMD LED Light Source:



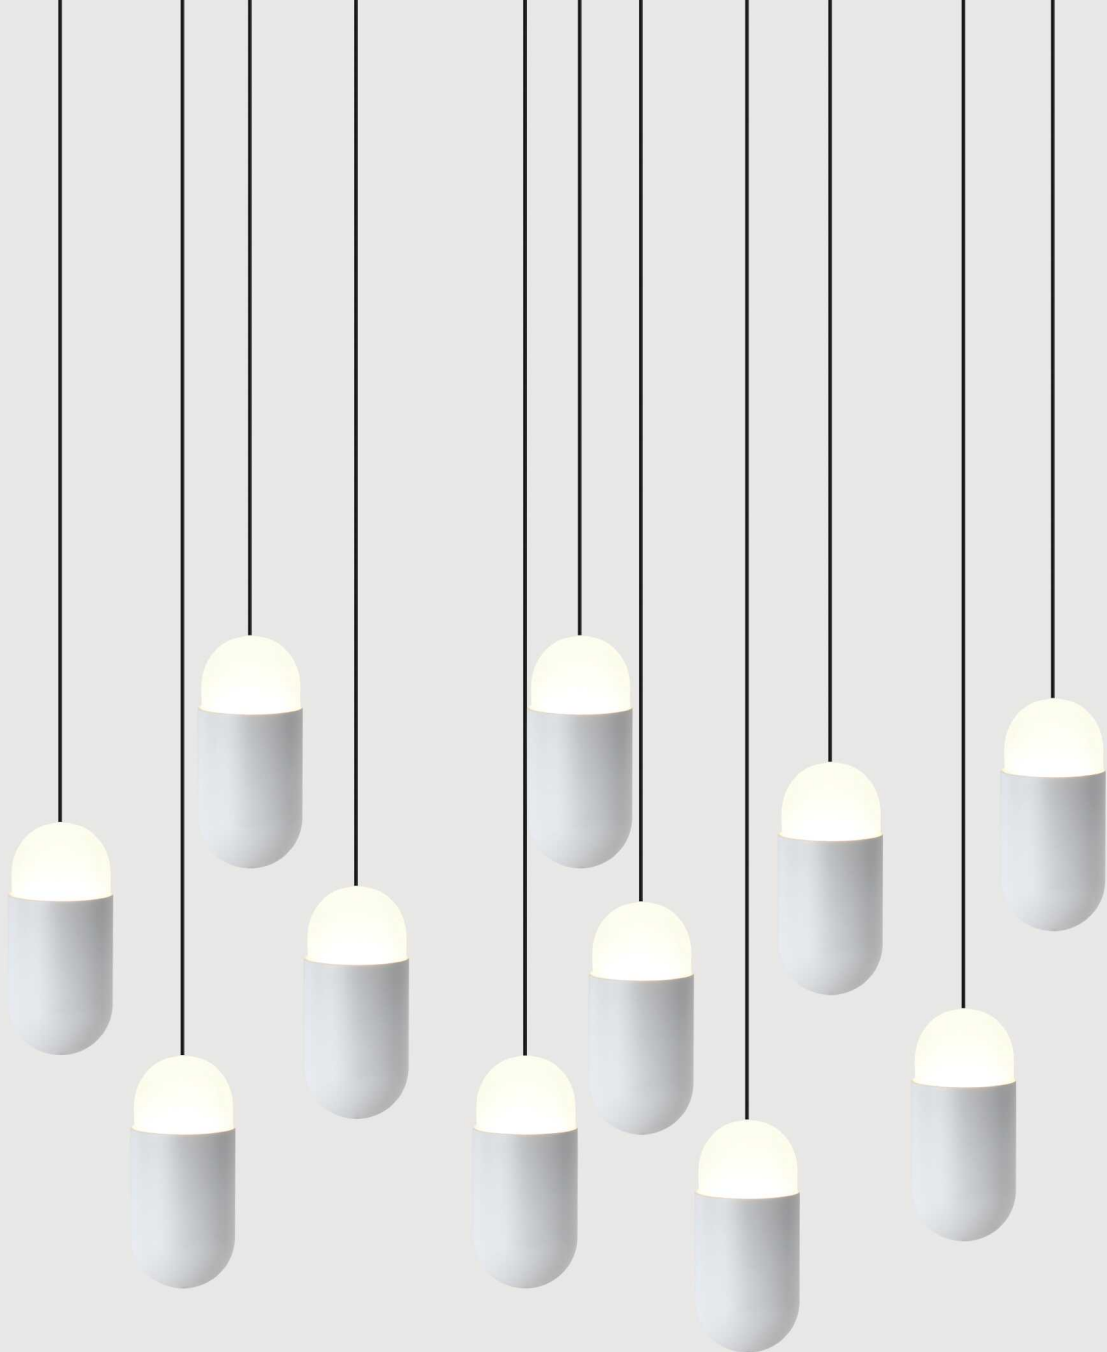

Product series

**AP-DZ-0215A-10W**



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs
24 LEDs SMD

Luminous Flux
750LM (3000K)

Main Material
Aluminum & Glass

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

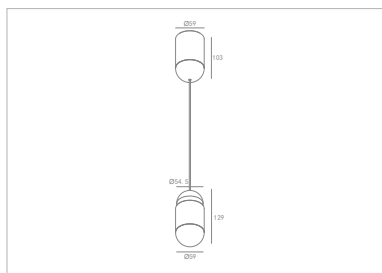

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0215A-10W	
Packaging Detail	48.5×33×46.5cm	
	STD PKG	24pcs
	N.W	16.32kgs
	G.W	18.32kgs

## AP-DZ-0215A-10W

DC36V10W LEDDC3000K/ PRI: 750lm220-240/ incl.V~ 50/60-Hz

Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠110°

	1m	165.24lx	765.07cm
	2m	41.31lx	1530.15cm
	3m	18.36lx	2295.22cm
	4m	10.33lx	3060.30cm
	5m	6.61lx	3825.37cm
cd	Height	illuminance	Diameter

## Option colors



## Various Brand of SMD LED Light Source:





Product series


**AP-PDT701-80W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	80W±10% Max
Number of LEDs	80 LEDs SMD
Luminous Flux	5500LM (3000K)
Main Material	Aluminum & PMMA
Color Temperature	3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	130°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

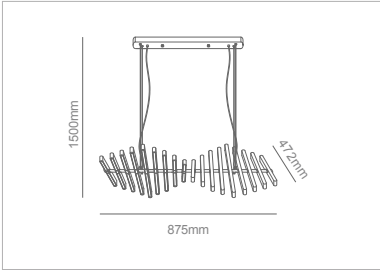


**Especially designed for:**  
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-PDT701-80W	
Packaging Detail	98.5×71×13cm	
	STD PKG	1pcs
	N.W	4.77kgs
	G.W	6.25kgs

Luxury and perfection  
Light and decoration

It has strong Postmodernism Characteristics, pays attention to smooth line design, returns to nature, advocates natural charm, plus modern and applicable exquisite art design style

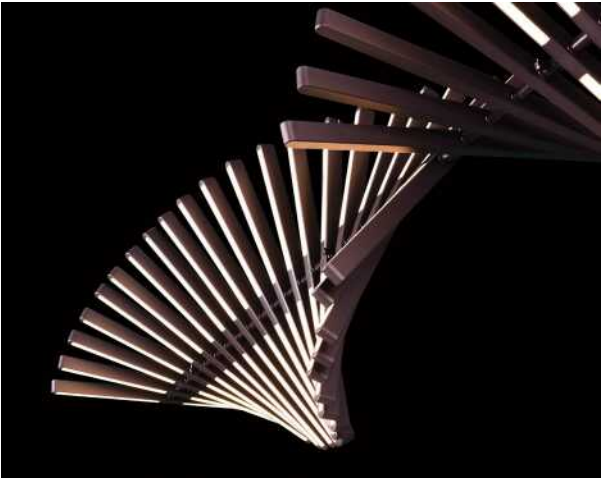

Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMENUS	DISON	SAMSUNG	BRIGGS	LG
-------	---------	--------	---------	---------	---------	-------	---------	--------	----

LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	100W±10% Max


Number of LEDs	
100 LEDs SMD	

Luminous Flux	
6250LM (3000K)	

Main Material	
Aluminum & PMMA	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥80
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	130°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

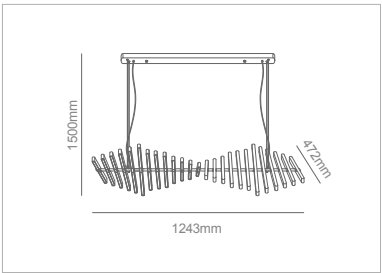

**Especially designed for:**  
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-PDT701-100W	
Packaging Detail	135.5×73.5×13cm	
	STD PKG	1pcs
	N.W	6kgs
	G.W	8.5kgs



Giving your room more light is not only to protect the health but also to decorate your taste of life.

The understanding of the color and characteristic of life depends on yourself.

PERSONALITY • CONTRACTED • FASHION

Various Brand of COB LED Light Source:


OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMENUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	150W±10% Max
Number of LEDs	
150 LEDs SMD	
Luminous Flux	
9375LM (3000K)	
Main Material	
Aluminum & PMMA	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥80
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	130°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

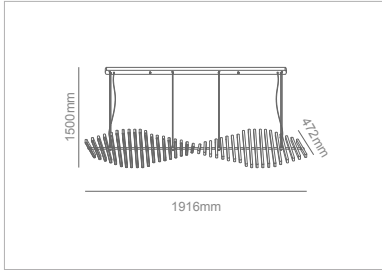


**Especially designed for:**  
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-PDT701-150W	
Packaging Detail	200.5×74.5×13cm	
	STD PKG	1pcs
	N.W	9.9kgs
	G.W	14.5kgs

# Curve Art

All inspiration comes from nature and Fantasy: the radian of waves and the lines of conch, the veins of mountains are the source of inspiration, the shape of each window, the position of each brick. It is worth pondering for a long time what kind of curve is suitable for use

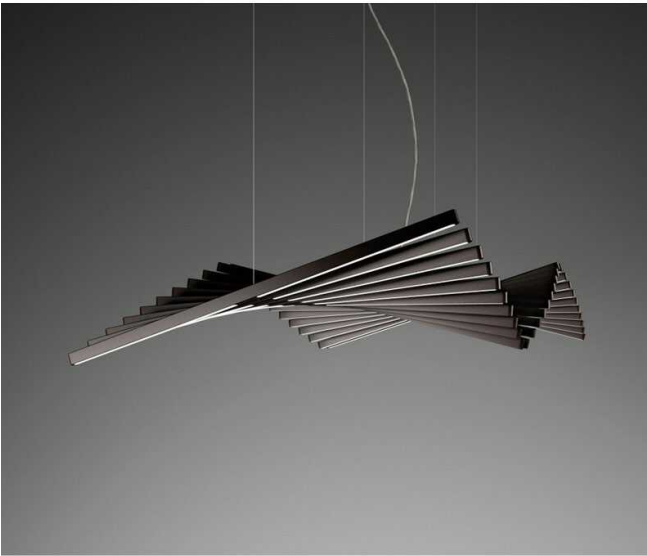

Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMENUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----



Product series


**AP-PDT702-7W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max
Number of LEDs	1 LEDs COB
Luminous Flux	418LM (3000K)
Main Material	Aluminum & PC Lens Diffuser
Color Temperature	3000K

CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	15°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

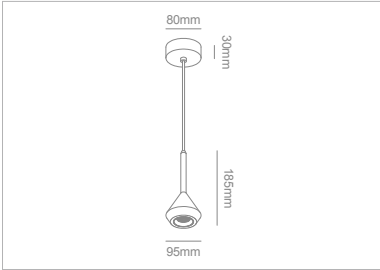

**Especially designed for:**  
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-PDT702-7W	
Packaging Detail	67×45×28cm	
	STD PKG	20pcs
	N.W	11.56kgs
	G.W	13.34kgs

**AP-PDT702-7W**  
7W LED, 3000K, 418lm / 16lm / 10lm, 220-240V~50/60 Hz, 0.050A, DC=12VDC, PFI: 220-240V~50/60 Hz, DMX512, CEC: Constant Current: DC600mA



1m	1396.80lx	35.63cm
2m	349.20lx	71.25cm
3m	155.20lx	106.88 cm
4m	87.30lx	142.50 cm
5m	55.87lx	178.13 cm

Warm White 3000K ∠ 15°

cd Height illuminance Diameter

Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMENUS	DISON	SAMSUNG	trigreen	LG
-------	---------	--------	---------	---------	---------	-------	---------	----------	----



Product series

**AP-PDT703-7W**



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

#### Number of LEDs

1 LEDs COB

#### Luminous Flux

330LM (3000K)

#### Main Material

Aluminum & PC Lens Diffuser

#### Color Temperature

3000K

CRI ≥80

Power Factor ≥0.8


Working Temperature -10°C~45°C

Beam Angle (Optional) 20°

Fixture Dimmable Non-dimmable

#### Electrical

Protection class IP20

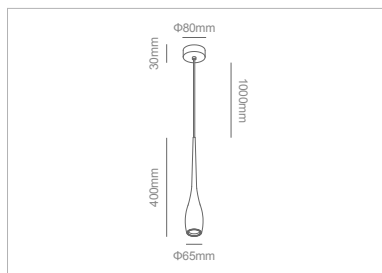

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-PDT703-7W	
Packaging Detail 	54×46.5×41cm	
	STD PKG	12pcs
	N.W	10.8kgs
	G.W	13.4kgs

## AP-PDT703-7W

DC8-12VDC7W LED 3000K/ PRI:330lm220-240/ incl.V~50/60 Hz 0.050A  
Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 20°

	1m	1396.80lx	35.63cm
	2m	349.20lx	71.25cm
	3m	155.20lx	106.88 cm
	4m	87.30lx	142.50 cm
	5m	55.87lx	178.13 cm
cd	Height	illuminance	Diameter

### Various Brand of COB LED Light Source:





Product series


**AP-PDT706-7W**



## LED PENDANT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
277LM (3000K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
3000K	


CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	130°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

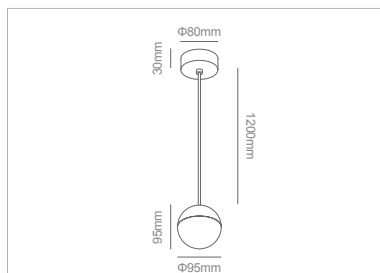

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-PDT706-7W	
Packaging Detail 	69.5×40×62cm	
	STD PKG	20pcs
	N.W	11.56kgs
	G.W	13.34kgs

## AP-PDT706-7W

DC8-12VDC7W LED 3000K/ PRI:277lm220-240/ incl.V~50/60 Hz 0.050A  
Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠130°

	1m	127.53lx	471.17cm
	2m	31.88lx	942.34cm
	3m	14.17lx	1413.51cm
	4m	7.97lx	1884.68cm
	5m	5.10lx	2355.85cm
cd	Height	illuminance	Diameter

### Various Brand of COB LED Light Source:







Product series

**AP-PDT707-7W**



## LED PENDANT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs	
1 LEDs COB	

Luminous Flux	
330LM (3000K)	

Main Material	
Die-casting Aluminum & PC Lens Diffuser	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	20°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

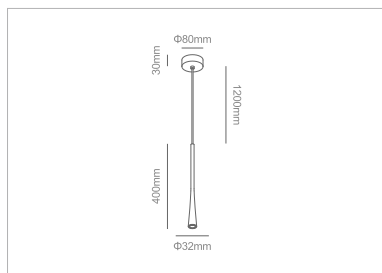

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-PDT707-7W	
Packaging Detail	50×50×50.5cm	
	STD PKG	16pcs
	N.W	10kgs
	G.W	11.5kgs

## AP-PDT707-7W

7W LED 3000K 330lm / incl. - Driver SEC: Constant Current: DC600mA  
DC8-12VDC / PRI: 220-240 V~ 50/60 Hz 0.050A



Warm White 3000K ∠20°

1m	127.53lx	471.17cm
2m	31.88lx	942.34cm
3m	14.17lx	1413.51cm
4m	7.97lx	1884.68cm
5m	5.10lx	2355.85cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

### Various Brand of COB LED Light Source:



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
330LM (3000K)

Main Material
Die-casting Aluminum & PC Lens Diffuser

Color Temperature
3000K / 4000K / 6500K


CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	20°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

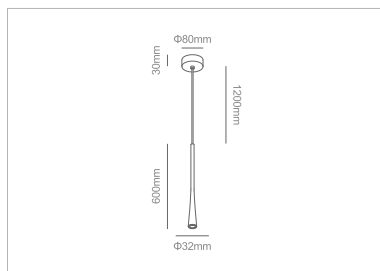

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-PDT707-7W	
Packaging Detail	70.5×38×50cm	
	STD PKG	12pcs
	N.W	5.8kgs
	G.W	8.7kgs

## AP-PDT707-7W

7W LED 3000K 330lm / incl. - Driver SEC: Constant Current: DC600mA  
DC8-12VDC / PRI: 220-240 V~ 50/60 Hz 0.050A



Warm White 3000K ∠20°

	1m	127.53lx	471.17cm
	2m	31.88lx	942.34cm
	3m	14.17lx	1413.51cm
	4m	7.97lx	1884.68cm
	5m	5.10lx	2355.85cm
cd	Height	illuminance	Diameter

### Various Brand of COB LED Light Source:



## LED PENDANT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs	
1 LEDs COB	

Luminous Flux	
330LM (3000K)	

Main Material	
Die-casting Aluminum & PC Lens Diffuser	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	20°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

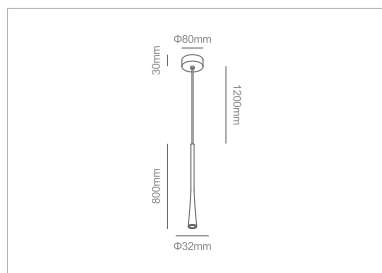

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-PDT707-7W	
Packaging Detail	90.5×38×50cm	
	STD PKG	12pcs
	N.W	6.7kgs
	G.W	10.7kgs

## AP-PDT707-7W

7W LED 3000K 330lm / incl. - Driver SEC: Constant Current: DC600mA  
DC8-12VDC / PRI: 220-240 V~ 50/60 Hz 0.050A



Warm White 3000K ∠ 20°


<div> <div>25.7</div> <div>51.4</div> <div>77.1</div> <div>102.8</div> <div>128.5</div> </div>	1m	127.53lx	471.17cm
	2m	31.88lx	942.34cm
	3m	14.17lx	1413.51cm
	4m	7.97lx	1884.68cm
	5m	5.10lx	2355.85cm
cd	Height	illuminance	Diameter

### Various Brand of COB LED Light Source:



Product series

# AP-PDT707-9×3W

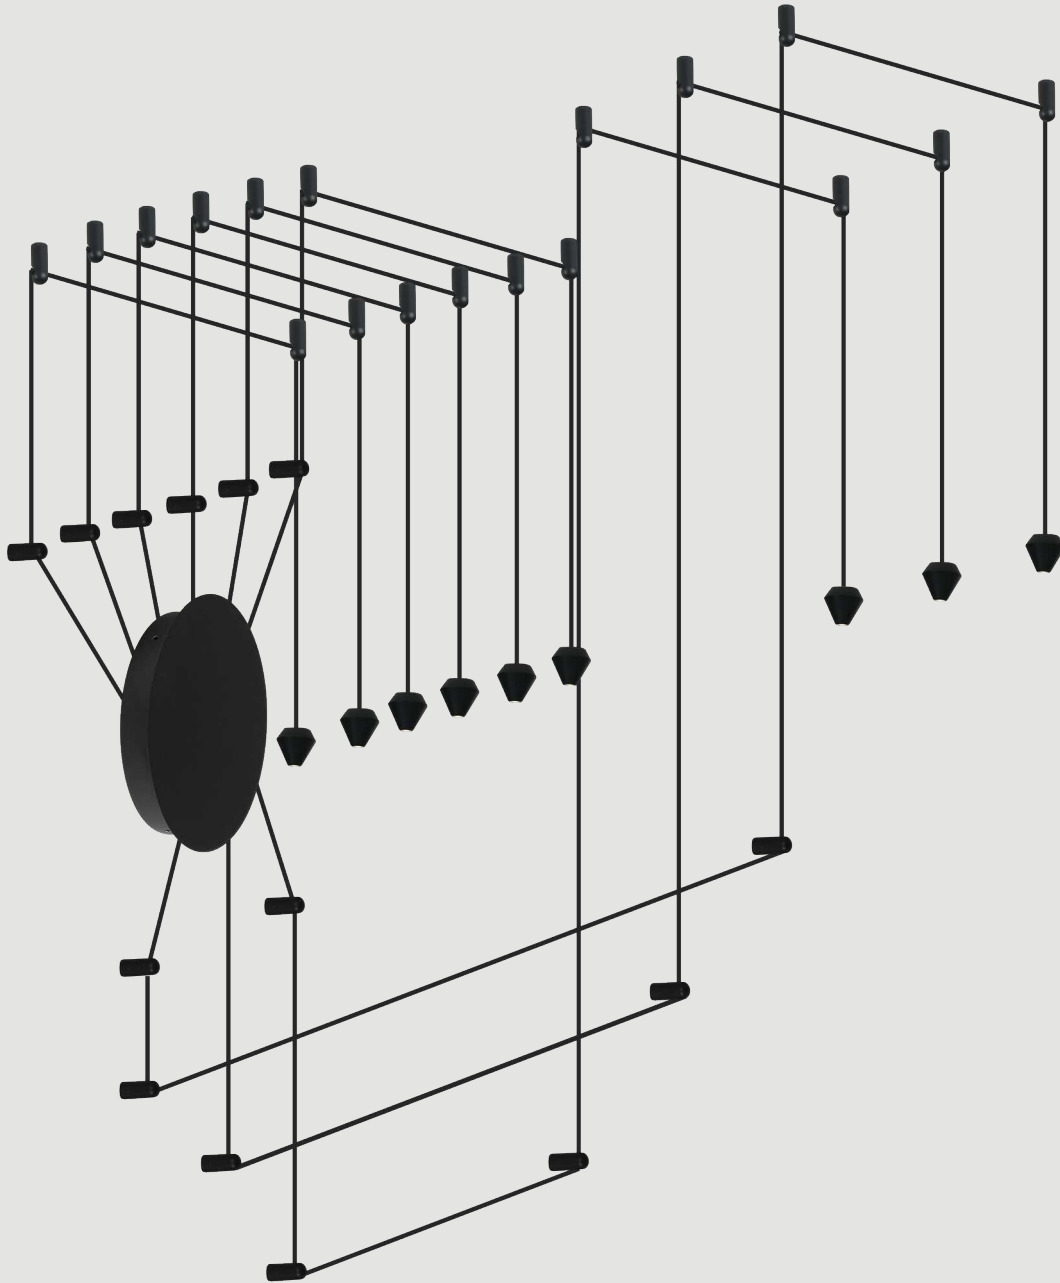

## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	3W±10% Max


Number of LEDs
1 LED COB

Luminous Flux
210LM (3000K)

Main Material
Die-casting Aluminum & PC Lens Diffuser


Color Temperature
3000K

CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	15°
Fixture Dimmable	Non-dimmable
Electrical	Electronic Internal Driver
Protection class	IP20

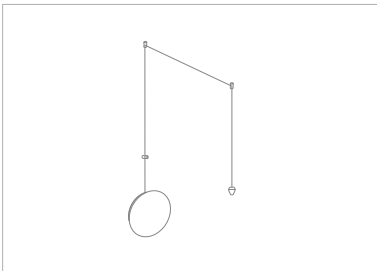

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-PDT707-1×3W	
Packaging Detail	31x24x14.5cm	
	STD PKG	1pcs
	N.W	1.1kgs
	G.W	2kgs



## AP-PDT707-1×3W

DC170mA3W LED 3000KDC30-42VDC210lm / incl./ PRI:-220-240 V~ 50/60 Hz 0.050A

ELECTRONIC Driver SEC: Constant Current:



Warm White 3000K ∠ 15°

	1m	2420.69lx	39.24cm
	2m	605.17lx	78.48cm
	3m	268.97lx	117.72cm
	4m	151.29lx	156.95cm
	5m	96.83lx	196.19cm
cd	Height	illuminance	Diameter

### Various Brand of COB LED Light Source:



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 9W±10% Max

**Number of LEDs**

3 LEDs COB

**Luminous Flux**

630LM (3000K)

**Main Material**

Die-casting Aluminum & PC Lens Diffuser

**Color Temperature**

3000K

**CRI** ≥80

**Power Factor** ≥0.8

**Working Temperature** -10°C~45°C

**Beam Angle (Optional)** 15°

**Fixture Dimmable** Non-dimmable

**Electrical** Electronic Internal Driver

**Protection class** IP20



**Product Model No.** AP-PDT707-3x3W

**Packaging Detail** 45.5x34x14.5cm



STD PKG 1pcs

N.W 2.65kgs

G.W 3.15kgs


## AP-PDT707-3x3W

DC170mA9W LED 3000KDC30-42VDC630lm / incl./ PRI:-220-240 V~ 50/60 Hz 0.050A


ELECTRONIC Driver SEC: Constant Current:



Warm White 3000K ∠ 15°

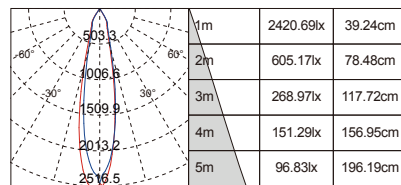

cd Height illuminance Diameter

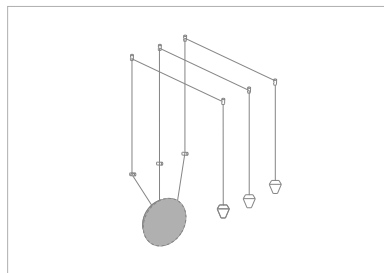

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



### Various Brand of COB LED Light Source:






## LED PENDANT LIGHT


TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	18W±10% Max
Number of LEDs	6 LEDs COB
Luminous Flux	1260LM (3000K)
Main Material	Die-casting Aluminum & PC Lens Diffuser
Color Temperature	3000K

CRI	≥80
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	15°
Fixture Dimmable	Non-dimmable
Electrical	Electronic Internal Driver
Protection class	IP20

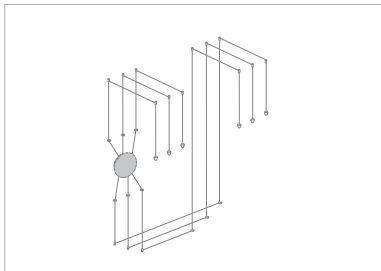

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-PDT707-6×3W	
Packaging Detail	61x34x14.5cm	
	STD PKG	1pcs
	N.W	4.2kgs
	G.W	4.8kgs

## AP-PDT707-6×3W

18WDC170mALED 3000KDC30-42VDC1260lm // PRI:incl. -220-240ELECTRONICV~ 50/60DriverHz  
0.050ASEC: Constant Current:



Warm White 3000K ∠ 15°

	1m	2420.69lx	39.24cm
	2m	605.17lx	78.48cm
	3m	268.97lx	117.72cm
	4m	151.29lx	156.95cm
	5m	96.83lx	196.19cm
cd	Height	illuminance	Diameter

### Various Brand of COB LED Light Source:



## LED PENDANT LIGHT

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 27W±10% Max

#### Number of LEDs

9 LEDs COB

#### Luminous Flux

1890LM (3000K)

#### Main Material

Die-casting Aluminum & PC Lens Diffuser

#### Color Temperature

3000K

**CRI** ≥80

**Power Factor** ≥0.92


**Working Temperature** -10°C~45°C

**Beam Angle (Optional)** 15°

**Fixture Dimmable** Non-dimmable


**Electrical** Electronic Internal Driver

**Protection class** IP20



### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-PDT707-9×3W

**Packaging Detail** 72x45x14.5cm



STD PKG 1pcs

N.W 7.1kgs


G.W 8kgs

## AP-PDT707-9×3W

27WDC170mALED 3000KDC30-42VDC1890lm // PRI:incl. -220-240ELECTRONICV~ 50/60DriverHz 0.050ASEC: Constant Current:



Warm White 3000K ∠ 15°

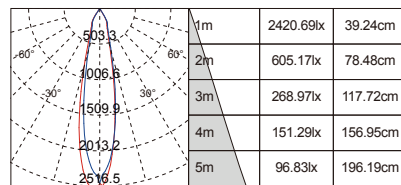

cd Height illuminance Diameter

### Various Brand of COB LED Light Source:





Product series

AP-PJ-0030



## LED PENDANT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	
24 LEDs PATCH	

Luminous Flux	
515LM (3000K)	

Main Material	
Die-casting Aluminum	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver



Product Model No.	AP-PJ-0030	
Packaging Detail	36×28×45.5cm	
	STD PKG	18pcs
	N.W	15.9kgs
	G.W	17.4kgs

## AP-PJ-0030

10W LED 3000K 722lm / incl. - Driver SEC: Constant Current: DC200mA  
DC28-42VDC / PRI: 220-240 V~ 50/60 Hz 0.12A



Warm White 3000K ∠110°

	1m	701.32lx	104.56cm
	2m	175.33lx	209.11cm
	3m	77.92lx	313.67cm
	4m	43.83lx	418.23cm
	5m	28.05lx	522.79cm
cd	Height	illuminance	Diameter

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



### Various Brand of COB LED Light Source:

