
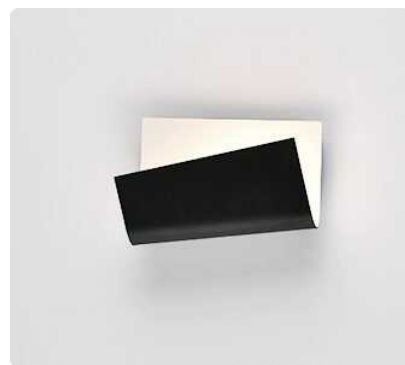


*-Page wall lamp-*

Minimalist Nordic Europe  
Skilled craftsmen in space lighting

# A variety of styles, changing with your heart

Open from the wall like a book or document, simple but  
tasteful, elegant but interesting

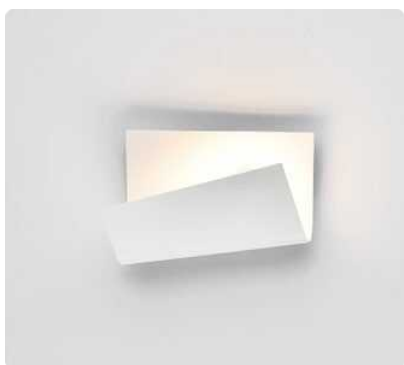


# FOCUS ON MINIMALIST DESIGN

Not confined to traditional and modern style, let the least and most delicate elements get the richest presentation.

## Light,

Abandon the complicated decoration, only leave the elegant side

Not only high appearance, but also high quality

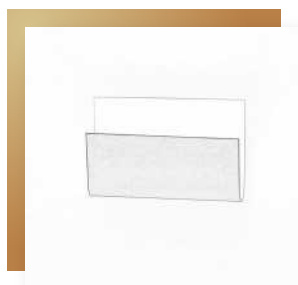



# FULL OF LIVING ROOM

---

Let elegance fill the room

A good-looking bedside wall lamp is an extremely important "design language" for the wall. It can not only improve the soft decoration effect of the whole room, but also create a romantic and warm light effect, and mobilize the atmosphere of the whole space.




# Minimalism in northern Europe



It happened that I met you, and everything I love in my life is like it.



*The moment darkness  
falls.....*

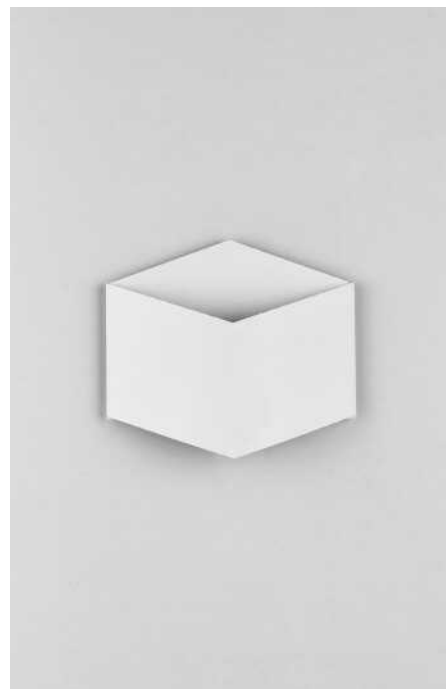

*Waiting for to the peace mind brought  
by the light.....*

Simple design, low-key interpretation of fashion taste, with different lights,  
add a bit of nature and flexibility to the home



○○○

## HALO OF LIGHT

---

SIMPLE BUT EXTRAORDINARY, ELEGANT BUT NOT  
VULGAR, LET THE DULL WALL ACTIVE

/ Art lighting /

# WALL LAMP



Design inspiration and fashion elements coexist  
For you to create a different living space

Whatever you want, all kinds of fashion

Suitable for bedroom, small living room, study, aisle.....





//  
—

## Refined life


The pursuit of exquisite life is the natural embodiment of wisdom. paying attention to low-carbon environmental protection is not only a profound feeling, but also a state of quiet water.

# PRODUCT SIZE

---

You can choose from a variety of sizes

Aim to create a comfortable lighting life for you in northern Europe

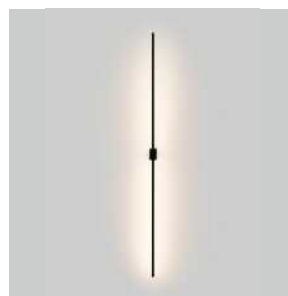



# HEALTHY AND COMFORTABLE

## Outdated high face value

Aim to create a comfortable lighting life for you in northern Europe




|

With a comfortable natural beauty  
Pursuit is committed to simplicity without losing fashion

Nordic aesthetics modern

|

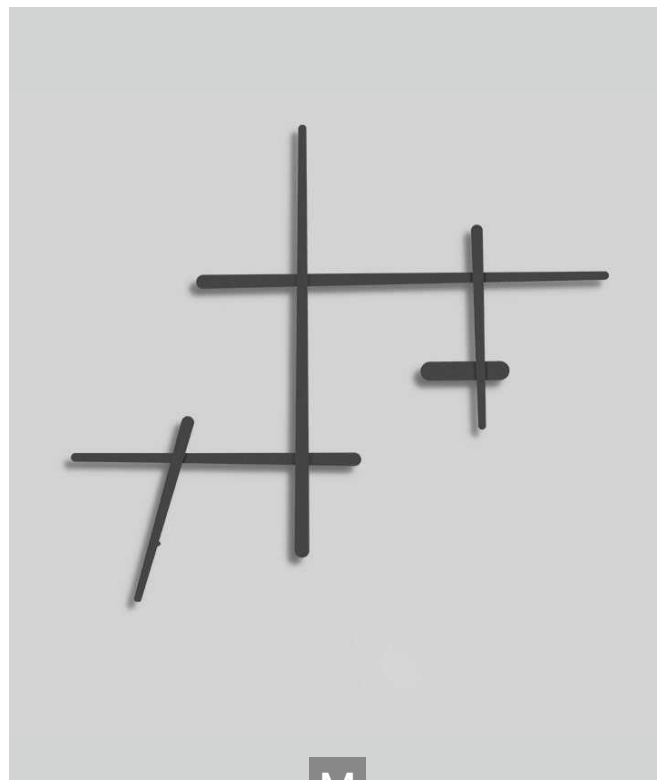

M

*Every trivial detail design has a beautiful pursuit of  
comfort and nature, and is committed to simplicity rather  
than simplicity. The design from complexity to simplicity  
has been brought into full play and become a classic*





The simple lines give the space a simple light, the beauty that can't be sculpted is natural and pure, and only do yourself to meet the beautiful vision of home



## Creative design + — NORDIC EUROPE

The simple lines give the space a simple light, the beauty that can't be sculpted is natural and pure, and only do yourself to meet the beautiful vision of home

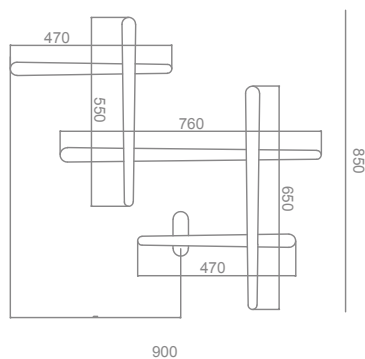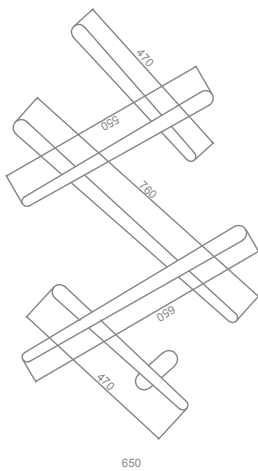



Product code: AP-BD-0042A  
Power: 25W  
CRI:  $\geq 90$   
Beam angle: 110°  
Protection class: IP20  
Main Material: Aluminum



---

## BUD LIGHT

A good-looking bedside wall lamp is an extremely important "design language" for the wall. It can not only improve the soft decoration effect of the whole room, but also create a romantic and warm light effect, and mobilize the atmosphere of the whole space.

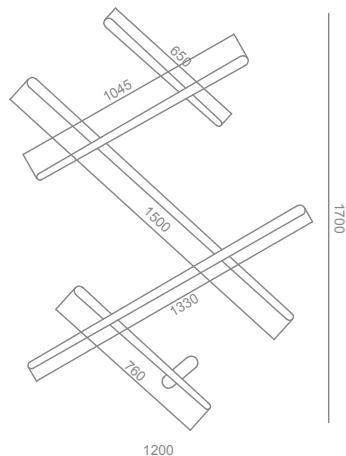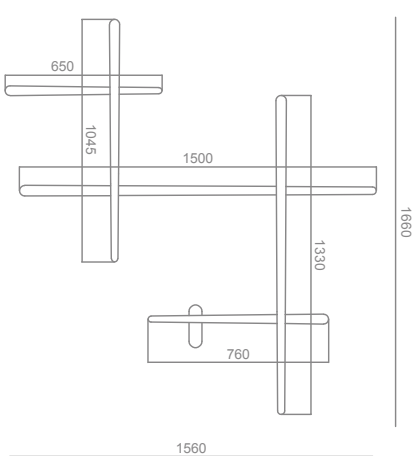

Product code: AP-BD-0041A  
 Power: 38W  
 CRI:  $\geq 90$   
 Beam angle: 110°  
 Protection class: IP20  
 Main Material: Aluminum



Product series

# AP-BD-0001A-7.5W



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7.5W±10% Max


Number of LEDs
48 LEDs SMD

Luminous Flux
504LM (3000K)

Main Material
Aluminum + Iron

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

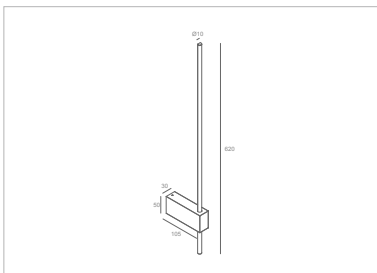

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0001A-7.5W	
Packaging Detail	68×58×35cm	
	STD PKG	20pcs
	N.W	5.96kgs
	G.W	7.96kgs

## AP-BD-0001A-7.5W

DC30-42V7.5W LED 3000KDC / P

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠110°



	1m	207.26lx	236.25cm
	2m	51.81lx	472.50cm
	3m	23.03lx	708.75cm
	4m	12.95lx	945.00cm
	5m	8.29lx	1181.25cm
cd	Height	illuminance	Diameter

### Various Brand of SMD LED Light Source:



Product series

# AP-BD-0002A-15W

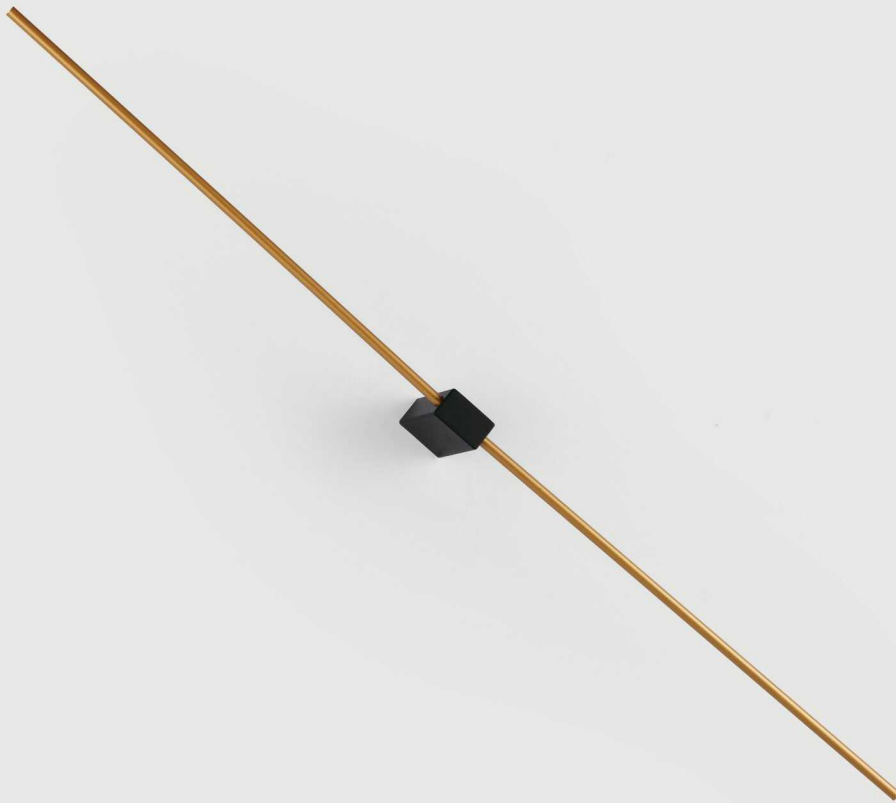

## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max


Number of LEDs
96 LEDs SMD

Luminous Flux
776LM (3000K)

Main Material
Aluminum + Iron

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

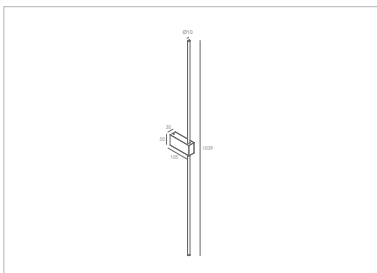

Product Model No.	AP-BD-0002A-15W	
Packaging Detail	130×28.5×44cm	
	STD PKG	12pcs
	N.W	4.22kgs
	G.W	6.22kgs

### AP-BD-0002A-15W

DC30-42V15W LED 3000KDC / PR  
Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠110°

	1m	323.52lx	226.46cm
	2m	80.88lx	452.91cm
	3m	35.95lx	679.37cm
	4m	20.22lx	905.83cm
	5m	12.94lx	1132.28cm
cd	Height	illuminance	Diameter

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




### Various Brand of SMD LED Light Source:



Product series

# AP-BD-0003A-15W





## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max


Number of LEDs
96 LEDs SMD

Luminous Flux
776LM (3000K)

Main Material
Aluminum + Iron

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

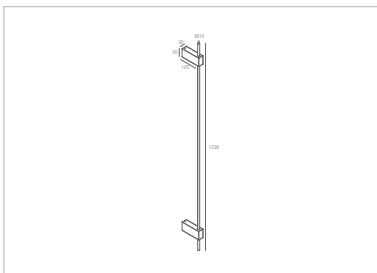

Product Model No.	AP-BD-0003A-15W	
Packaging Detail	130×28.5×44cm	
	STD PKG	12pcs
	N.W	7.14kgs
	G.W	9.14kgs



## AP-BD-0003A-15W

DC30-42V15W LED 3000KDC / PRI:776lm220-240/ incl. V~50/60 Hz 0.050A

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠110°

	1m	323.52lx	226.46cm
	2m	80.88lx	452.91cm
	3m	35.95lx	679.37cm
	4m	20.22lx	905.83cm
	5m	12.94lx	1132.28cm
cd	Height	illuminance	Diameter

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




### Various Brand of SMD LED Light Source:



Product series

# AP-BD-0004A-15W



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max


Number of LEDs
96 LEDs SMD

Luminous Flux
867LM (3000K)

Main Material
Aluminum + Iron

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

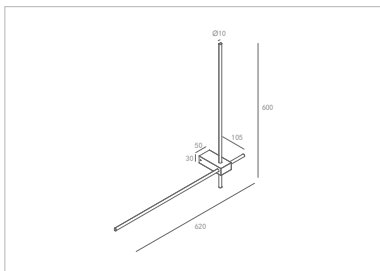

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0004A-15W	
Packaging Detail	58×58×14.5cm	
	STD PKG	1pcs
	N.W	0.36kgs
	G.W	1.36kgs

## AP-BD-0004A-15W

DC30-42V15W LED 3000KDC / PR

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠110°


	1m	350.57lx	241.76cm
	2m	87.64lx	483.52cm
	3m	38.95lx	725.28cm
	4m	21.91lx	967.03cm
	5m	14.02lx	1208.79cm
cd	Height	illuminance	Diameter

### Various Brand of SMD LED Light Source:



Product series

# AP-BD-0005A-15W



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max


Number of LEDs
96 LEDs SMD

Luminous Flux
867LM (3000K)

Main Material
Aluminum + Iron

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

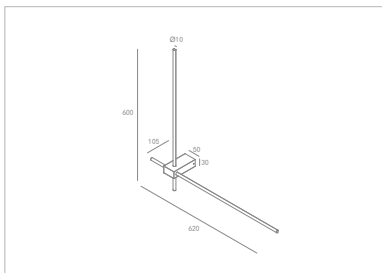

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0005A-15W	
Packaging Detail	58×58×14.5cm	
	STD PKG	1pcs
	N.W	0.36kgs
	G.W	1.36kgs

## AP-BD-0005A-15W

DC30-42V15W LED 3000KDC / PR

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠110°

	1m	350.57lx	241.76cm
	2m	87.64lx	483.52cm
	3m	38.95lx	725.28cm
	4m	21.91lx	967.03cm
	5m	14.02lx	1208.79cm
cd	Height	illuminance	Diameter


### Various Brand of SMD LED Light Source:





Product series

**AP-BD-0010A-7W**

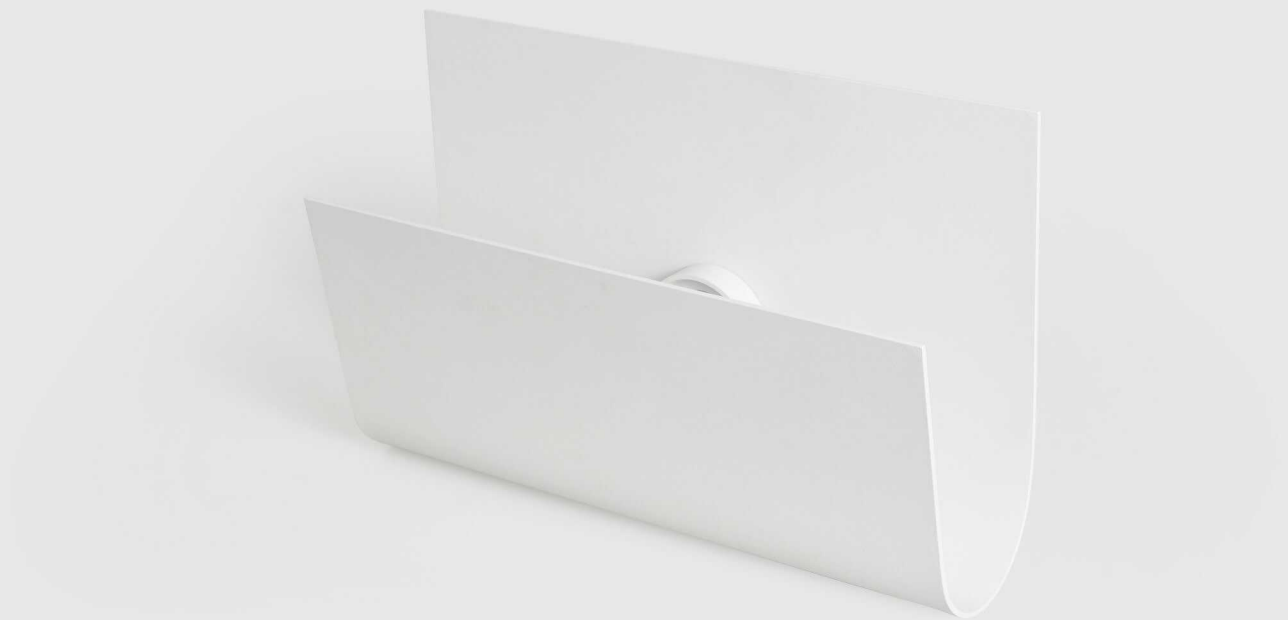

## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 7W±10% Max

**Number of LEDs**

1 LEDs COB

**Luminous Flux**

144LM (3000K)

**Main Material**

Aluminum

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8

**Working Temperature** -10°C~45°C

**Beam Angle (Optional)** 110°

**Fixture Dimmable** Non-dimmable

**Electrical**

**Protection class** IP20



**Product Model No.** AP-BD-0010A-7W

**Packaging Detail** 62×52×30cm



STD PKG 8pcs

N.W 8.94kgs

G.W 11.5kgs


## AP-BD-0010A-7W

DC30-42V7W LED 3000KDC / PRI:140lm220-240/ incl. -V~ 50/60 Hz 0.050A


Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠110°

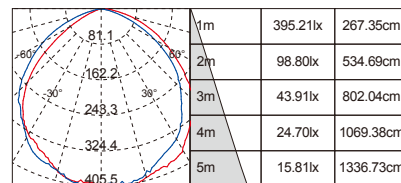

cd Height illuminance Diameter

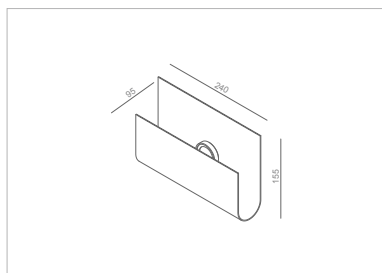

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



### Various Brand of COB LED Light Source:



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

#### Number of LEDs

1 LEDs COB

#### Luminous Flux

144LM (3000K)

#### Main Material

Aluminum

#### Color Temperature

3000K / 4000K / 6500K

CRI ≥90

Power Factor ≥0.8

Working Temperature -10°C~45°C

Beam Angle (Optional) 110°

Fixture Dimmable Non-dimmable

#### Electrical

Protection class IP20

Internal  
Driver



Product Model No.	AP-BD-0011A-7W	
Packaging Detail	62×52×30cm	
	STD PKG	8pcs
	N.W	9.07kgs
	G.W	12.07kgs




## AP-BD-0011A-7W

DC30-42V7W LED 3000KDC / PRI


Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠110°

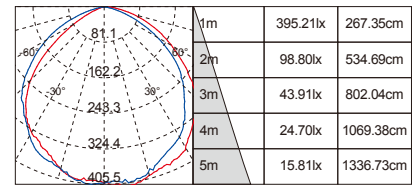

cd Height illuminance Diameter



### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



### Various Brand of COB LED Light Source:



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 7W±10% Max

**Number of LEDs**

1 LEDs COB

**Luminous Flux**

144LM (3000K)

**Main Material**

Aluminum

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8

**Working Temperature** -10°C~45°C

**Beam Angle (Optional)** 110°

**Fixture Dimmable** Non-dimmable

**Electrical**

**Protection class** IP20



**Product Model No.** AP-BD-0012A-7W

**Packaging Detail** 76.5×44.5×30cm



STD PKG 8pcs

N.W 8.94kgs

G.W 11.94kgs



## AP-BD-0012A-7W

DC30-42V7W LED 3000KDC / PRI

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠110°

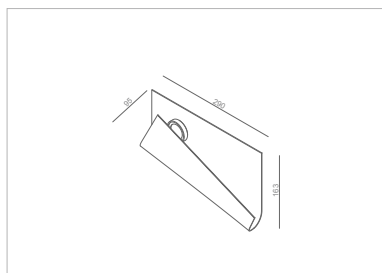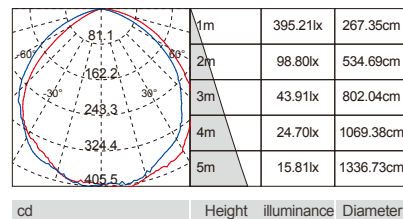

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



### Various Brand of COB LED Light Source:



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

#### Number of LEDs

1 LEDs COB

#### Luminous Flux

144LM (3000K)

#### Main Material

Aluminum

#### Color Temperature

3000K / 4000K / 6500K

CRI ≥90

Power Factor ≥0.8


Working Temperature -10°C~45°C

Beam Angle (Optional) 110°

Fixture Dimmable Non-dimmable

Electrical Internal Driver

Protection class IP20



### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0013A-7W	
Packaging Detail	76.5×44.5×30cm	
	STD PKG	8pcs
	N.W	8.85kgs
	G.W	11.85kgs



## AP-BD-0013A-7W

DC30-42V7W LED 3000KDC / PRI:140lm220-240/ incl. -V~ 50/60 Hz 0.050A

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠110°

1m	395.21lx	267.35cm
2m	98.80lx	534.69cm
3m	43.91lx	802.04cm
4m	24.70lx	1069.38cm
5m	15.81lx	1336.73cm

cd Height illuminance Diameter

### Various Brand of COB LED Light Source:



Product series

**AP-BD-0020A-13W**





## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs
65 LEDs SMD

Luminous Flux
711LM (3000K)

Main Material
Aluminum & PS

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

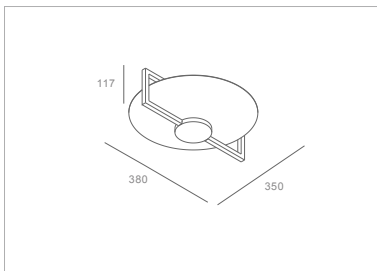

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0020A-13W	
Packaging Detail	45×45×48.5cm	
	STD PKG	3pcs
	N.W	4.5kgs
	G.W	6.5kgs

## AP-BD-0020A-13W

DC36V13W LEDDC3000K/ PRI: 711lm220-240/ incl.V~ 50/60-Hz 0.088A

Driver SEC: Constant Current: DC360mA



Warm White 3000K ∠110°

	1m	701.32lx	104.56cm
	2m	175.33lx	209.11cm
	3m	77.92lx	313.67cm
	4m	43.83lx	418.23cm
	5m	28.05lx	522.79cm
	cd	Height	illuminance Diameter

### Various Brand of SMD LED Light Source:



Product series

**AP-BD-0021A-26W**



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	26W±10% Max


Number of LEDs
130 LEDs SMD

Luminous Flux
1422LM (3000K)

Main Material
Aluminum & PS

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

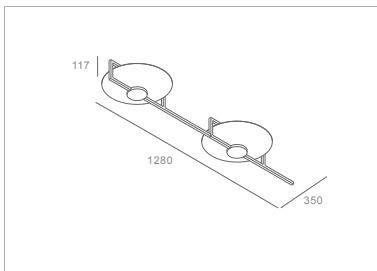

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0021A-26W	
Packaging Detail	135×43×19cm	
	STD PKG	1pcs
	N.W	3.2kgs
	G.W	5.2kgs

## AP-BD-0021A-26W

DC36V26W LEDDC3000K/ PRI: 14

Driver SEC: Constant Current: DC360mA



Warm White 3000K ∠110°


	1m	701.32lx	104.56cm
	2m	175.33lx	209.11cm
	3m	77.92lx	313.67cm
	4m	43.83lx	418.23cm
	5m	28.05lx	522.79cm
	cd	Height	illuminance Diameter

### Various Brand of SMD LED Light Source:



Product series

**AP-BD-0050A-7W**

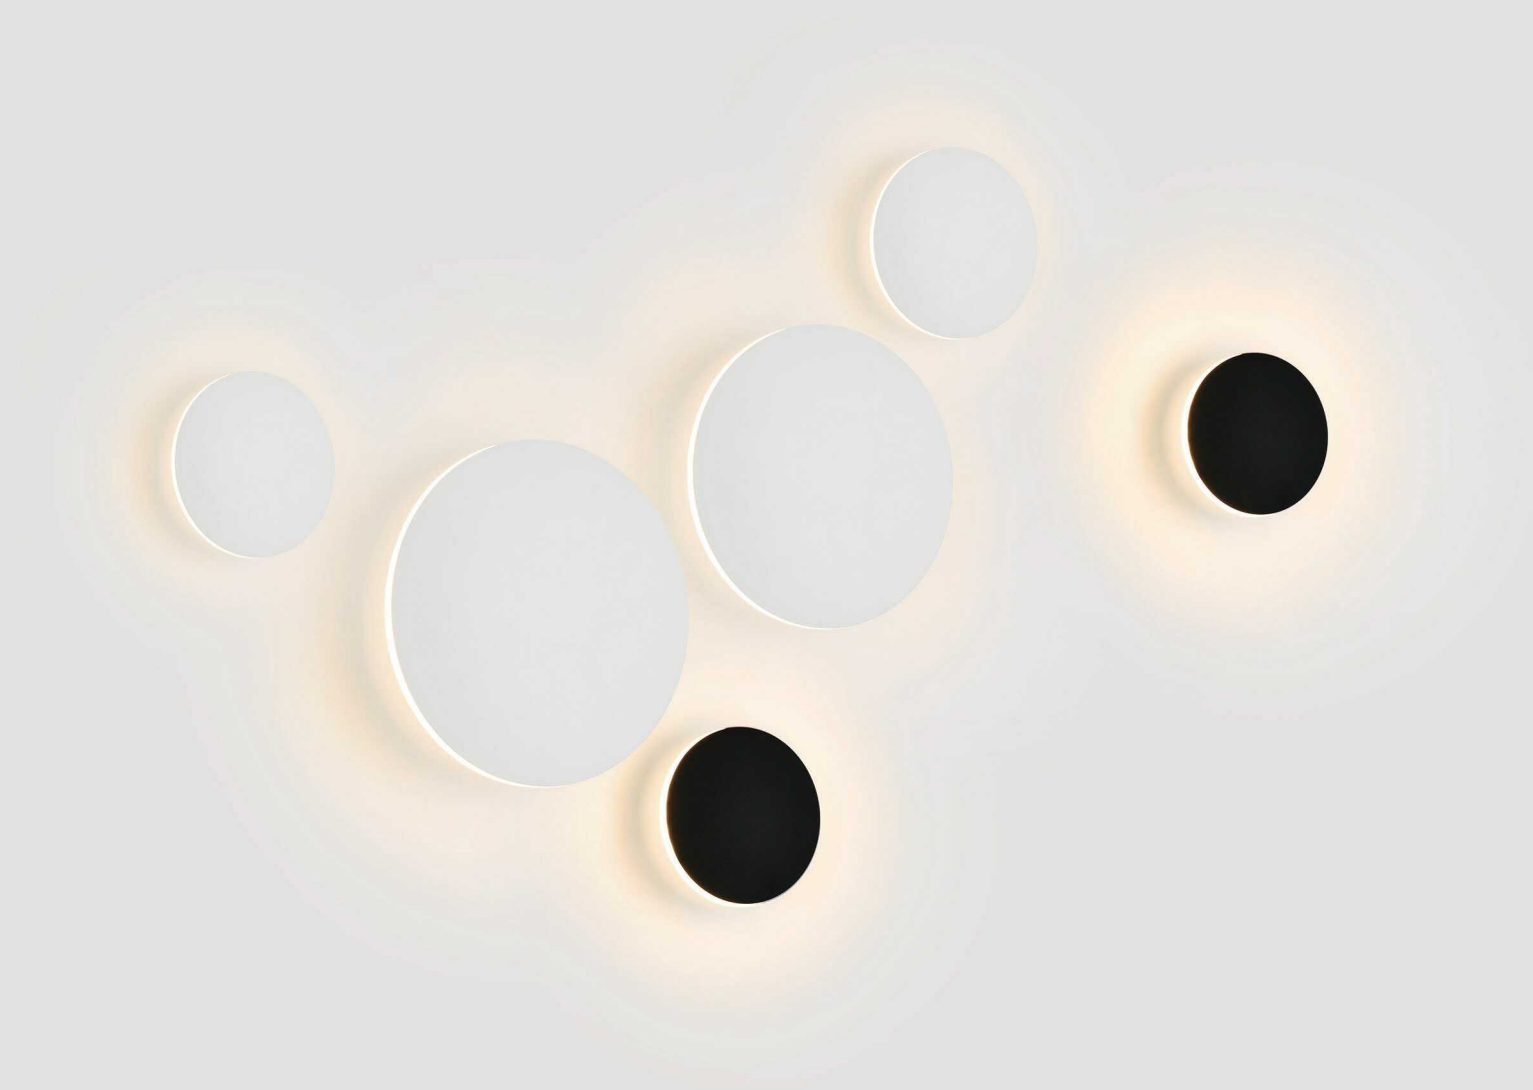

## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 7W±10% Max

**Number of LEDs**

35 LEDs SMD

**Luminous Flux**

255LM (3000K)

**Main Material**

Aluminum & Iron

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8

**Working Temperature** -10°C~45°C

**Beam Angle (Optional)** 110°

**Fixture Dimmable** Non-dimmable

**Electrical** Internal Driver

**Protection class** IP20



**Product Model No.** AP-BD-0050A-7W

**Packaging Detail** 62×31.5×35cm



STD PKG 6pcs

N.W 4.8kgs


G.W 6.8kgs

## AP-BD-0050A-7W


DC15-25VDC7W LED 3000K/ PRI:



Warm White 3000K ∠110°

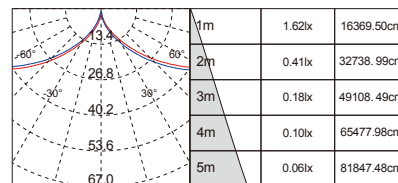

cd Height illuminance Diameter

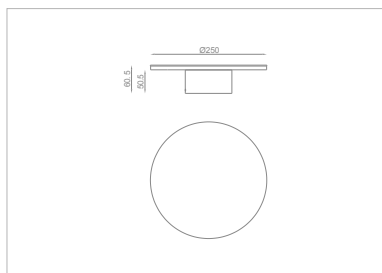

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



### Various Brand of SMD LED Light Source:



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 4W±10% Max

**Number of LEDs**

10 LEDs SMD

**Luminous Flux**

144LM (3000K)

**Main Material**

Aluminum & Iron

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8

**Working Temperature** -10°C~45°C


**Beam Angle (Optional)** 110°

**Fixture Dimmable** Non-dimmable

**Electrical**

Internal Driver

**Protection class** IP20

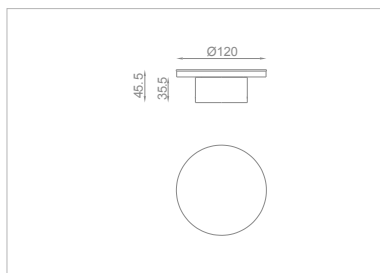

**Product Model No.** AP-BD-0051A-4W

**Packaging Detail**



56×37×35.5cm

STD PKG 30pcs

N.W 12.6kgs


G.W 14.4kgs

## AP-BD-0051A-4W

DC12-21VDC4W LED 3000K/ PRI:



Warm White 3000K ∠110°

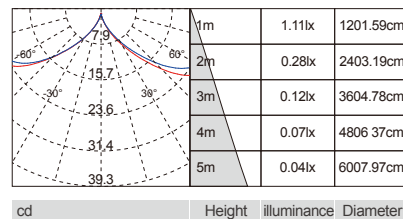

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




### Various Brand of SMD LED Light Source:





Product series

**AP-BD-0052A-7W**

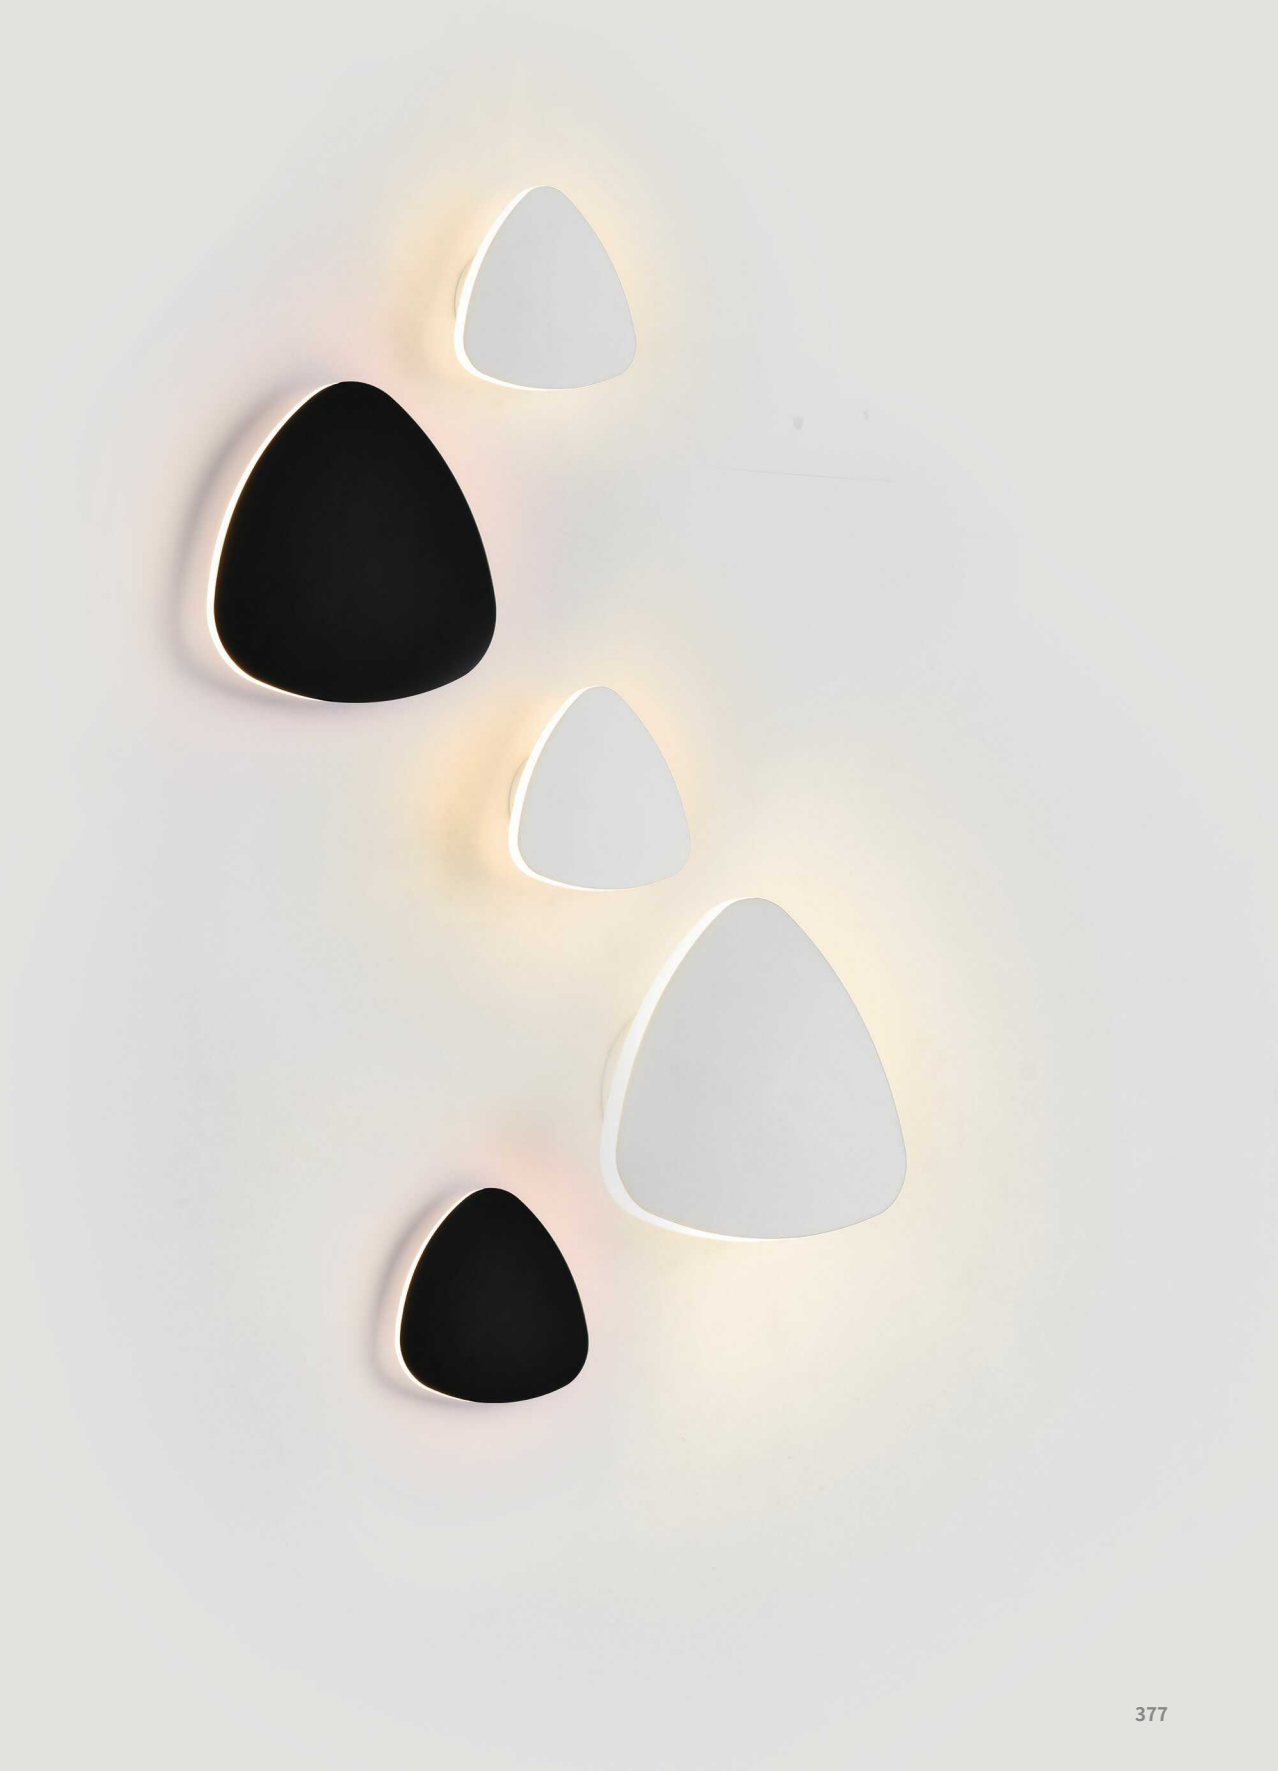

## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 7W±10% Max

**Number of LEDs**

35 LEDs SMD

**Luminous Flux**

260LM (3000K)

**Main Material**

Aluminum & Iron

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8

**Working Temperature** -10°C~45°C


**Beam Angle (Optional)** 110°

**Fixture Dimmable** Non-dimmable

**Electrical**

Internal Driver

**Protection class** IP20

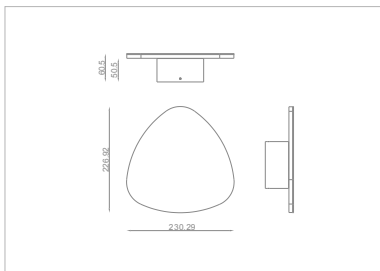

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-BD-0052A-7W

**Packaging Detail**



62×31.5×35cm


STD PKG 6pcs

N.W 4.8kgs


G.W 6.8kgs

## AP-BD-0052A-7W

DC15-25VDC7W LED 3000K/ PRI:



Warm White 3000K ∠110°

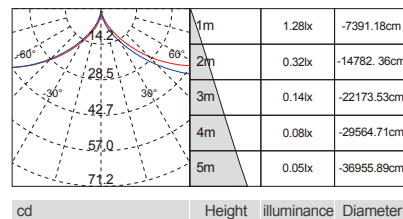

### Various Brand of SMD LED Light Source:



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 4W±10% Max

**Number of LEDs**

10 LEDs SMD

**Luminous Flux**

145LM (3000K)

**Main Material**

Aluminum & Iron

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8

**Working Temperature** -10°C~45°C


**Beam Angle (Optional)** 110°

**Fixture Dimmable** Non-dimmable

**Electrical**

Internal Driver

**Protection class** IP20

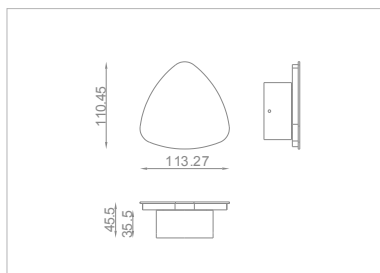

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-BD-0053A-4W

**Packaging Detail**



56×37×35.5cm

STD PKG 30pcs

N.W 12.6kgs


G.W 14.4kgs

## AP-BD-0053A-4W

DC12-21VDC4W LED 3000K/ PRI:



Warm White 3000K ∠110°

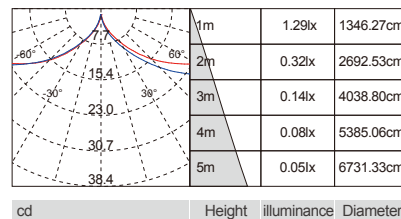


### Various Brand of SMD LED Light Source:



Product series

**AP-BD-0060A-6W**

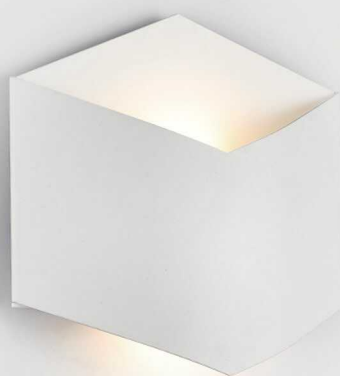

## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs
2 LEDs SMD

Luminous Flux
187LM (3000K)

Main Material
Aluminum & Iron


Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20



### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0060A-6W	
Packaging Detail	44×33×29cm	
	STD PKG	16pcs
	N.W	12.6kgs
	G.W	14.4kgs



## AP-BD-0060A-6W

DC12-21VDC6W LED 3000K/ PRI:



Warm White 3000K ∠ 110°

1m	19.33lx	443.98cm
2m	4.83lx	887.97cm
3m	2.15lx	1331.95cm
4m	1.21lx	1775.93cm
5m	0.77 lx	2219.92cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

### Various Brand of SMD LED Light Source:



Product series

AP-BD-0070A-5W





## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	5W±10% Max

#### Number of LEDs

1 LEDs COB

#### Luminous Flux

515LM (3000K)

#### Main Material

Aluminum & PC Lens Diffuser

#### Color Temperature

3000K / 4000K / 6500K

CRI ≥90

Power Factor ≥0.8


Working Temperature -10°C~45°C

Beam Angle (Optional) 45°

Fixture Dimmable Non-dimmable

Electrical Internal Driver

Protection class IP20



### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0070A-5W	
Packaging Detail	30.5×28×34cm	
	STD PKG	24pcs
	N.W	6.6kgs
	G.W	8.6kgs

## AP-BD-0070A-5W

DC2.5-5VDC5W LED(COB)/ PRI:3000K220-240V515lmV~/ incl.50/60-Hz 0.1A  
Driver SEC: Constant Current: DC2000mA



Warm White 3000K ∠45°

1m	701.32lx	104.56cm
2m	175.33lx	209.11cm
3m	77.92lx	313.67cm
4m	43.83lx	418.23cm
5m	28.05lx	522.79cm

cd Height illuminance Diameter

## Option colors



## Various Brand of COB LED Light Source:



Product series

**AP-BD-0071A-10W**



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs
2 LEDs COB

Luminous Flux
1030LM (3000K)

Main Material
Aluminum & PC Lens Diffuser

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	45°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20



### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0071A-10W	
Packaging Detail	32.5×32×27.5cm	
	STD PKG	18pcs
	N.W	7.60kgs
	G.W	9.60kgs

## AP-BD-0071A-10W

DC2000mA10W LED(COB)DC2.5-5VDC3000K 1030lm/ PRI: 220-240/ incl. -V~ 50/60 Hz 0.1A



Warm White 3000K ∠65°

	1m	701.32lx	104.56cm
	2m	175.33lx	209.11cm
	3m	77.92lx	313.67cm
	4m	43.83lx	418.23cm
	5m	28.05lx	522.79cm
cd	Height	illuminance	Diameter

### Option colors



### Various Brand of COB LED Light Source:



Product series

**AP-BD-0072A-10W**



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs
2 LEDs COB

Luminous Flux
1030LM (3000K)

Main Material
Aluminum & PC Lens Diffuser

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	45°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20

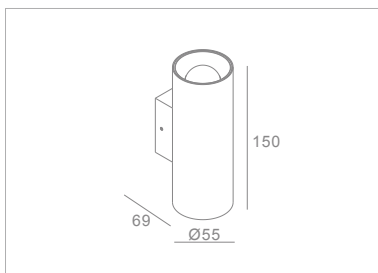

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0072A-10W	
Packaging Detail	37×32×27.5cm	
	STD PKG	18pcs
	N.W	7.56kgs
	G.W	9.56kgs

## AP-BD-0072A-10W

DC2000mA10W LED(COB)DC2.5-5VDC3000K 1030lm/ PRI: 220-240/ incl. -V~ 50/60 Hz 0.1A



Warm White 3000K ∠ 45°

1m	701.32lx	104.56cm
2m	175.33lx	209.11cm
3m	77.92lx	313.67cm
4m	43.83lx	418.23cm
5m	28.05lx	522.79cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

## Option colors



## Various Brand of COB LED Light Source:



Product series

AP-BD-0073A-10W



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs
2 LEDs COB

Luminous Flux
1030LM (3000K)

Main Material
Aluminum & PC Lens Diffuser

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	45°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

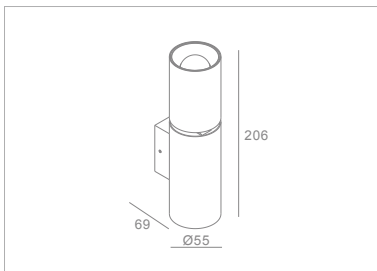

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0073A-10W	
Packaging Detail	48×32×27.5cm	
	STD PKG	18pcs
	N.W	10.10kgs
	G.W	12.10kgs

## AP-BD-0073A-10W

10W LED(COB) 3000K 515lm / incl. PRI: 220-240 V~ 50/60 Hz



Warm White 3000K ∠ 45°

	1m	701.32lx	104.56cm
	2m	175.33lx	209.11cm
	3m	77.92lx	313.67cm
	4m	43.83lx	418.23cm
	5m	28.05lx	522.79cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

## Option colors



## Various Brand of COB LED Light Source:





Product series

**AP-BD-0074A-5W**



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 5W±10% Max

#### Number of LEDs

1 LEDs COB

#### Luminous Flux

515LM (3000K)

#### Main Material

Aluminum & PC Lens Diffuser

#### Color Temperature

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8


**Working Temperature** -10°C~45°C

**Beam Angle (Optional)** 45°

**Fixture Dimmable** Non-dimmable

#### Electrical

**Protection class** IP20

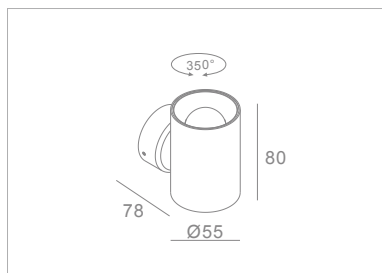

#### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-BD-0074A-5W

**Packaging Detail** 32×32×25cm



STD PKG 18pcs

N.W 4.91kgs


G.W 6.91kgs

## AP-BD-0074A-10W

10W LED(COB) 3000K 515lm / incl. PRI: 220-240 V~ 50/60 Hz



Warm White 3000K ∠45°

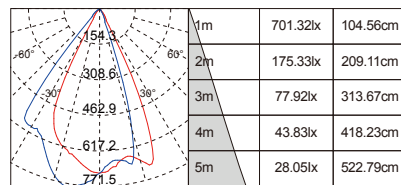

cd Height illuminance Diameter

## Option colors



## Various Brand of COB LED Light Source:



Product series

**AP-BD-0100A-12W**



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max


Number of LEDs
2 LEDs COB

Luminous Flux
1052LM (3000K)

Main Material
Aluminum


Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.55
Working Temperature	-10°C~45°C
Beam Angle (Optional)	15°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP65

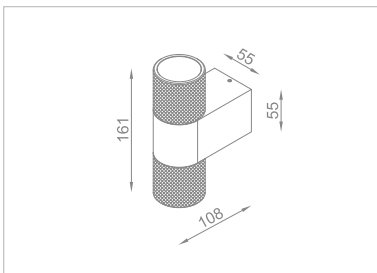

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.

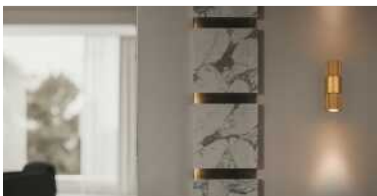

Product Model No.	AP-BD-0100A-12W	
Packaging Detail	51.5×43×26.5cm	
	STD PKG	18pcs
	N.W	4.36kgs
	G.W	6.36kgs

## AP-BD-0100A-12W

DC36V12W LEDDC3000K/ PRI: 10  
Driver SEC: Constant Current: DC300mA



Warm White 3000K ∠15°

	1m	2725.08lx	44.89cm
	2m	681.27lx	89.78cm
	3m	302.79lx	134.67cm
	4m	170.32lx	179.55cm
	5m	109.00lx	224.44cm
cd	Height	illuminance	Diameter

## Option colors



## Various Brand of COB LED Light Source:



Product series

# AP-BD-0101A-6W



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
526LM (3000K)

Main Material
Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.55
Working Temperature	-10°C~45°C
Beam Angle (Optional)	15°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP65

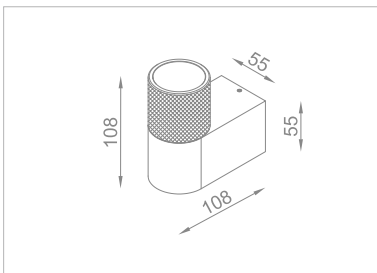

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-BD-0101A-6W	
Packaging Detail 	51.5×43×26.5cm	
	STD PKG	18pcs
	N.W	4.36kgs
	G.W	6.36kgs

## AP-BD-0101A-6W

DC36V6W LEDDC3000K/ PRI:526I  
Driver SEC: Constant Current: DC150mA



Warm White 3000K ∠15°

	1m	2725.08lx	44.89cm
	2m	681.27lx	89.78cm
	3m	302.79lx	134.67cm
	4m	170.32lx	179.55cm
	5m	109.00lx	224.44cm
cd	Height	illuminance	Diameter

## Option colors



## Various Brand of COB LED Light Source:



Product series

**AP-BD-0110A-4W+2W**



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs
48 LEDs SMD + 1 LEDs COB

Luminous Flux
214LM (3000K)

Main Material
Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.55
Working Temperature	-10°C~45°C
Beam Angle (Optional)	25°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

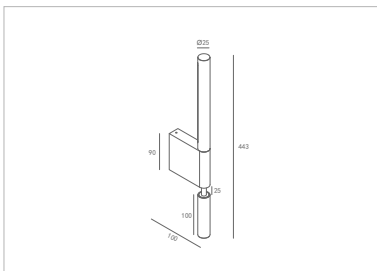

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0110A-4W+2W	
Packaging Detail	47×35×38cm	
	STD PKG	18pcs
	N.W	10.62kgs
	G.W	12.62kgs

## AP-BD-0110A-4W+2W

DC30-42VDC4W+2W LED 3000K/ PRI: 220-240214lm / incl.V~ 50/60-Hz 0.050A

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠25°

1m	395.21lx	267.35cm
2m	98.80lx	534.69cm
3m	43.91lx	802.04cm
4m	24.70lx	1069.38cm
5m	15.81lx	1336.73cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

### Features: light controlled switch




### Various Brand of SMD LED Light Source:





Product series

AP-BD-0130A-3W

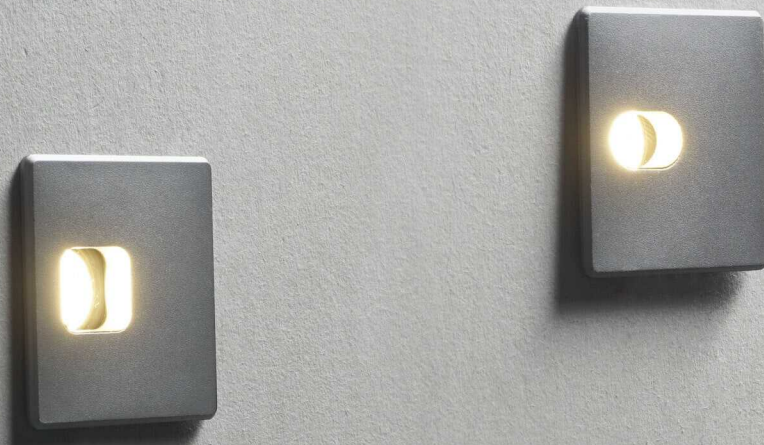

## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 3W±10% Max

**Number of LEDs**

1 LEDs COB

**Luminous Flux**

43LM (3000K)

**Main Material**

Aluminum

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8

**Working Temperature** -10°C~45°C

**Beam Angle (Optional)** 25°

**Fixture Dimmable** Non-dimmable

**Electrical**

Internal Driver

**Protection class** IP65



**Product Model No.** AP-BD-0130A-3W

**Packaging Detail** 32×24×34cm



STD PKG 36pcs

N.W 8.94kgs

G.W 11.5kgs


## AP-BD-0130A-3W

/3WPRI:LED220-2403000K V~43lm50/60/ incl.Hz-0.030A


Driver SEC: Constant Current: DC600mA DC3-6V DC



Warm White 3000K ∠25°

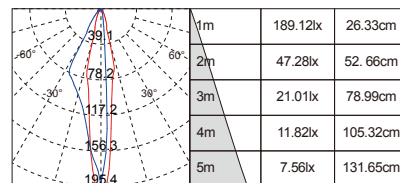


cd Height illuminance Diameter

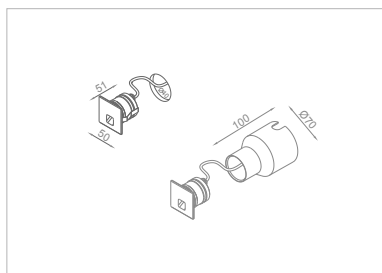

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.

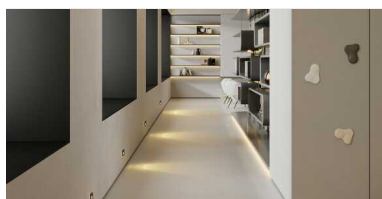

### Various Brand of COB LED Light Source:





## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 3W±10% Max

**Number of LEDs**

1 LEDs COB

**Luminous Flux**

32LM (3000K)

**Main Material**

Aluminum

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8

**Working Temperature** -10°C~45°C


**Beam Angle (Optional)** 25°

**Fixture Dimmable** Non-dimmable

**Electrical**

Internal Driver

**Protection class** IP65

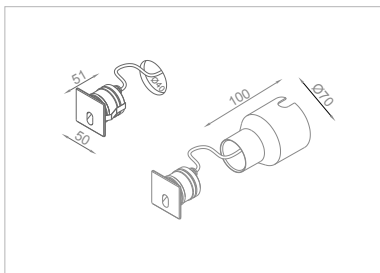

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-BD-0131A-3W

**Packaging Detail** 32×24×34cm



STD PKG 36pcs

N.W 8.94kgs

G.W 11.5kgs


## AP-BD-0131A-3W

/3WPRI:LED220-2403000K V~32lm50/60/ incl.Hz-0.030A

Driver SEC: Constant Current: DC600mADC3-6V DC



Warm White 3000K ∠25°

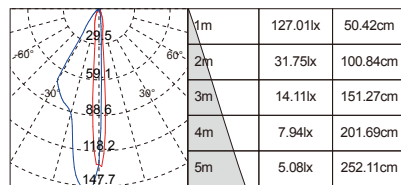

cd Height illuminance Diameter

### Various Brand of COB LED Light Source:





Product series

AP-BD-0132A-3W





## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 3W±10% Max

**Number of LEDs**

1 LEDs COB

**Luminous Flux**

35LM (3000K)

**Main Material**

Aluminum

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8

**Working Temperature** -10°C~45°C


**Beam Angle (Optional)** 25°

**Fixture Dimmable** Non-dimmable

**Electrical**

Internal Driver

**Protection class** IP65

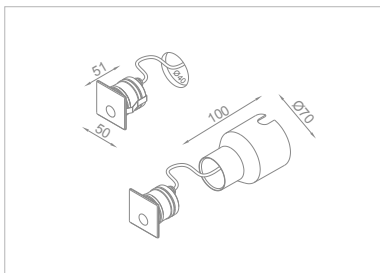

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-BD-0132A-3W

**Packaging Detail** 62×52×30cm



STD PKG 8pcs

N.W 8.94kgs

G.W 11.5kgs


## AP-BD-0132A-3W

/3WPRI:LED220-2403000K V~35lm50/60/ incl.Hz-0.030A

Driver SEC: Constant Current: DC600mADC3-6V DC



Warm White 3000K ∠25°

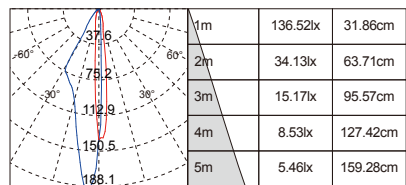

cd Height illuminance Diameter

### Various Brand of COB LED Light Source:



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	3W±10% Max


Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	32LM (3000K)
---------------	--------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	25°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP65

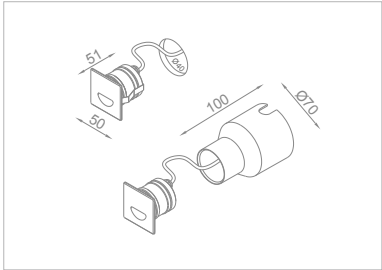

**Especially designed for:**  
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-BD-0133A-3W	
Packaging Detail	62×52×30cm	
	STD PKG	8pcs
	N.W	8.94kgs
	G.W	11.5kgs

**AP-BD-0133A-3W**  
/3W/PRI:LED220-2403000K V~32lm50/60/ incl.Hz-0.030A  
Driver SEC: Constant Current: DC600mADC3-6V DC



Warm White 3000K    ∠25°

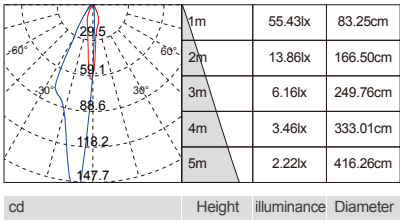

Various Brand of COB LED Light Source:



Product series

AP-BD-0134A-3W





## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 3W±10% Max

**Number of LEDs**

1 LEDs COB

**Luminous Flux**

144LM (3000K)

**Main Material**

Aluminum

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8

**Working Temperature** -10°C~45°C


**Beam Angle (Optional)** 25°

**Fixture Dimmable** Non-dimmable

**Electrical**

Internal Driver

**Protection class** IP65

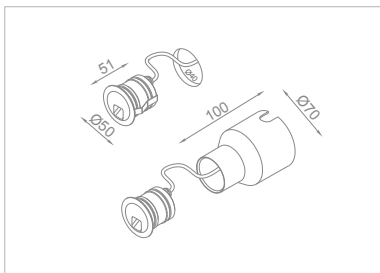

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-BD-0134A-3W

**Packaging Detail** 62×52×30cm



STD PKG 8pcs

N.W 8.94kgs

G.W 11.5kgs


## AP-BD-0134A-3W

DC3-6V3W LED DC3000K/ PRI:140lm220-240/ incl.V~50/60 Hz 0.030A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠25°

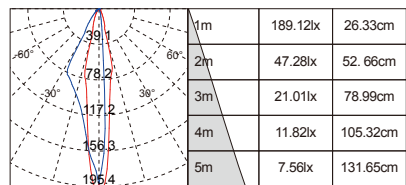

cd Height illuminance Diameter

### Various Brand of COB LED Light Source:





## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 3W±10% Max

**Number of LEDs**

1 LEDs COB

**Luminous Flux**

144LM (3000K)

**Main Material**

Aluminum

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8

**Working Temperature** -10°C~45°C


**Beam Angle (Optional)** 25°

**Fixture Dimmable** Non-dimmable

**Electrical**


Internal Driver

**Protection class** IP65



### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.

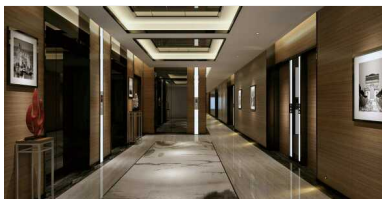

**Product Model No.** AP-BD-0135A-3W

**Packaging Detail** 62×52×30cm



STD PKG 8pcs

N.W 8.94kgs

G.W 11.5kgs


## AP-BD-0135A-3W

DC3-6V3W LED DC3000K/ PRI:140lm220-240/ incl.V~50/60 Hz 0.030A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠25°

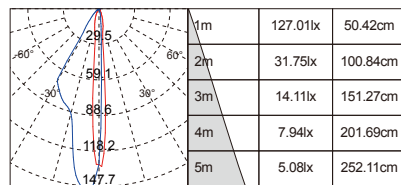

cd Height illuminance Diameter

### Various Brand of COB LED Light Source:



Product series

AP-BD-0136A-3W





## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 3W±10% Max

**Number of LEDs**

1 LEDs COB

**Luminous Flux**

144LM (3000K)

**Main Material**

Aluminum

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8

**Working Temperature** -10°C~45°C


**Beam Angle (Optional)** 25°

**Fixture Dimmable** Non-dimmable

**Electrical**

Internal Driver

**Protection class** IP65



### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-BD-0136A-3W

**Packaging Detail** 62×52×30cm



STD PKG 8pcs

N.W 8.94kgs

G.W 11.5kgs


## AP-BD-0136A-3W

DC3-6V3W LED DC3000K/ PRI:140lm220-240/ incl.V~50/60 Hz 0.030A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠25°

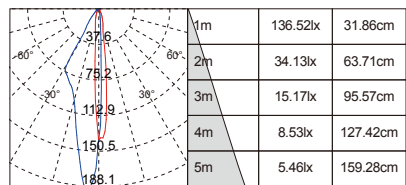

cd Height illuminance Diameter

### Various Brand of COB LED Light Source:



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 3W±10% Max

**Number of LEDs**

1 LEDs COB

**Luminous Flux**

144LM (3000K)

**Main Material**

Aluminum

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8

**Working Temperature** -10°C~45°C


**Beam Angle (Optional)** 25°

**Fixture Dimmable** Non-dimmable

**Electrical**

Internal Driver

**Protection class** IP65



**Product Model No.** AP-BD-0137A-3W

**Packaging Detail** 62×52×30cm



STD PKG 8pcs

N.W 8.94kgs

G.W 11.5kgs


## AP-BD-0137A-3W

DC3-6V3W LED DC3000K/ PRI:140lm220-240/ incl.V~-50/60 Hz 0.030A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠25°

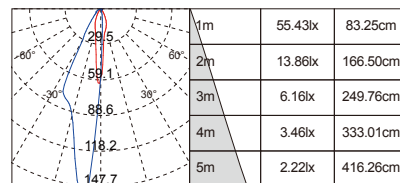

cd Height illuminance Diameter

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



### Various Brand of COB LED Light Source:



Product series

# AP-BD-1410A-14W



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 14W±10% Max

**Number of LEDs**

2 LEDs COB

**Luminous Flux**

440LM (3000K)

**Main Material**

Aluminum

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8

**Working Temperature** -10°C~45°C


**Beam Angle (Optional)** 15°/24°/36°

**Fixture Dimmable** Non-dimmable

**Electrical**

Internal Driver

**Protection class** IP55



**Product Model No.** AP-BD-1410A-14W

**Packaging Detail** 27.5×27.5×25cm




STD PKG 12pcs

N.W 10.8kgs


G.W 12.8kgs

## AP-BD-1410A-14W

14W220-240LEDV~3000K50/60440



Warm White 3000K ∠15°

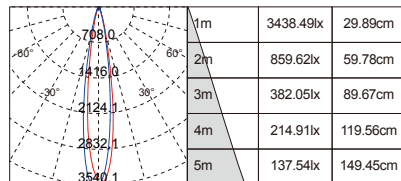

cd Height illuminance Diameter

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



### Various Brand of COB LED Light Source:



Product series

**AP-BD-1420A-10W**



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

#### Number of LEDs

1 LEDs COB

#### Luminous Flux

347LM (3000K)

#### Main Material

Aluminum & PC Lens Diffuser

#### Color Temperature

3000K / 4000K / 6500K

CRI ≥90

Power Factor ≥0.92


Working Temperature -10°C~45°C

Beam Angle (Optional) 110°

Fixture Dimmable Non-dimmable

#### Electrical

Protection class IP55

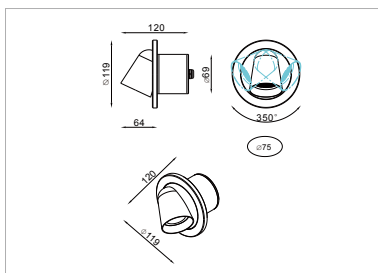

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-1420A-10W	
Packaging Detail	50×33.5×39cm	
	STD PKG	12pcs
	N.W	7.2kgs
	G.W	9.2kgs

## AP-BD-1420A-10W

DC36V10W LEDDC3000K/ PRI: 347lm220-240/ incl.V~ 50/60-Hz 0.15A  
Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠110°

	1m	2012.43lx	39.60cm
	2m	503.11lx	79.20cm
	3m	223.60lx	118.80cm
	4m	125.78lx	158.40cm
	5m	80.50lx	198.01cm
cd	Height	illuminance	Diameter

### Various Brand of COB LED Light Source:





Product series

AP-BD-1441A-10W



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
623LM (3000K)

Main Material
Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

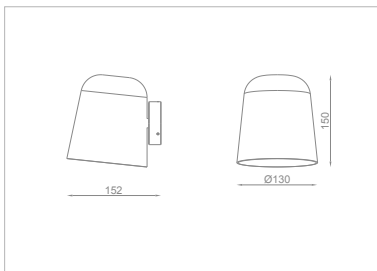

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-1441A-10W	
Packaging Detail	39×38.5×37cm	
	STD PKG	8pcs
	N.W	4.4kgs
	G.W	6.44kgs

## AP-BD-1441A-10W

DC28-42V10W LED 3000KDC / PRI:623lm220-240/ incl. V~50/60 Hz 0.15A

Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠110°

	1m	337.46lx	172.33cm
	2m	84.37lx	344.66cm
	3m	37.50lx	516.99cm
	4m	21.09lx	689.32cm
	5m	13.50lx	861.66cm
cd	Height	illuminance	Diameter

### Option colors



### Various Brand of COB LED Light Source:



Product series

# AP-BD-1440A-10W



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 10W±10% Max

**Number of LEDs**

1 LEDs COB

**Luminous Flux**

623LM (3000K)

**Main Material**

Aluminum

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8

**Working Temperature** -10°C~45°C


**Beam Angle (Optional)** 110°

**Fixture Dimmable** Non-dimmable

**Electrical**

Internal Driver

**Protection class** IP20

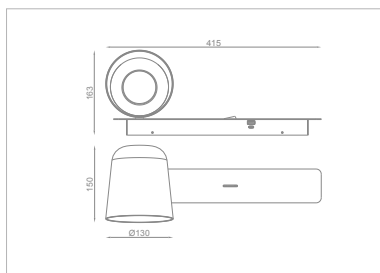

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-BD-1441A-10W

**Packaging Detail** 84×49×43cm



STD PKG 8pcs

N.W 4.6kgs

G.W 6.6kgs


## AP-BD-1441A-10W

DC28-42V10W LED 3000KDC / PRI:623lm220-240/ incl. V~50/60 Hz 0.15A

Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠110°

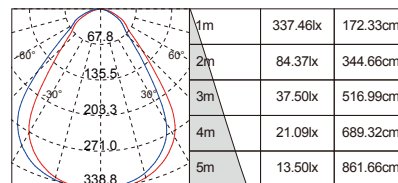

cd Height illuminance Diameter

## Option colors



## Various Brand of COB LED Light Source:



## LED WALL LAMP

### TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz

**Maximum Wattage** 10W±10% Max

**Number of LEDs**

1 LEDs COB

**Luminous Flux**

623LM (3000K)

**Main Material**

Aluminum

**Color Temperature**

3000K / 4000K / 6500K

**CRI** ≥90

**Power Factor** ≥0.8


**Working Temperature** -10°C~45°C

**Beam Angle (Optional)** 110°

**Fixture Dimmable** Non-dimmable

**Electrical**

**Protection class** IP20

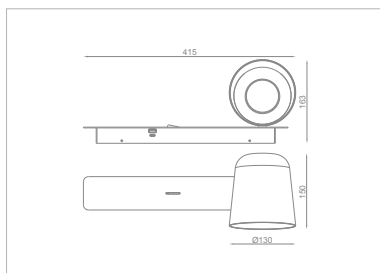

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Product Model No.** AP-BD-1442A-10W

**Packaging Detail** 84×49×43cm



STD PKG 8pcs

N.W 4.6kgs

G.W 6.6kgs


## AP-BD-1442A-10W

DC28-42V10W LED 3000KDC / PRI:623lm220-240/ incl. V~50/60 Hz 0.15A

Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠110°

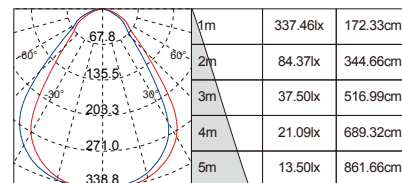

cd Height illuminance Diameter

### Option colors



### Various Brand of COB LED Light Source:

